

APPLICATIONS



Washbasin

PUMPING



WARRANTY



REFERENCES

Sanicompact
Comfort:
EAN 3308815012223
C72LV
Sanicompact
Comfort+:
EAN 3308815083247
C72LVCPLUS



Sanicompact Comfort, Comfort+

Sanicompact Comfort+ Bracket

COMFORT+ VERSION



Bowl solution with maceration + support frame.

Universal self-supporting frame. (Comfort +)



Soft-closing toilet lid.

Can be connected to a washbasin.

Mounting possible on all wall types. (Comfort +)

Silence technology: 51 dB(A).

COMFORT+ BRACKET VERSION



Complete solution: bowl with macerator + support frame + heat-bonded housing.

Universal self-supporting frame. (Comfort +)



No work: quick installation.

Can be connected to a washbasin.

3 housing colour options: White, Grey and Anthracite.

Silence technology: 51 dB(A).



Sanicompact Comfort+



Sanicompact Comfort

PACKING LIST

Sanicompact Comfort, Comfort+

Universal self-supporting frame (Sanicompact Comfort +)

Short frame with adjustable feet (Sanicompact Comfort)

Wall-hung bowl

Check valve

Soft closing toilet seat supplied

Sanicompact Comfort+ Bracket

Universal self-supporting frame


Wall-hung bowl

Housing

Check valve

Soft closing toilet seat supplied

PUMP PERFORMANCE CURVE

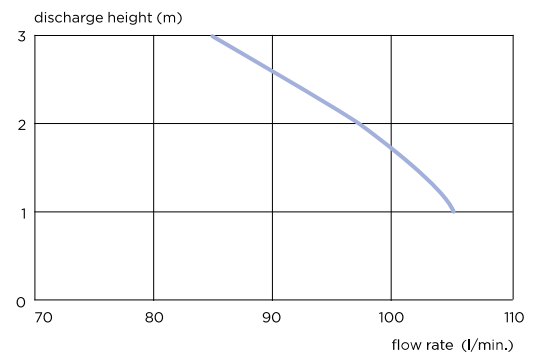



APPLICATIONS



Washbasin

PUMPING



WARRANTY




Sanicompact
Comfort+ Bracket
Anthracite
EAN 3308815083254
C72LVCPLUSAC


Sanicompact
Comfort+ Bracket
Grey
EAN 3308815083261
C72LVCPLUSAG

Sanicompact
Comfort+ Bracket
White:
EAN 3308815083278
C72LVCPLUSAW


AVAILABLE COLOURS



White



Grey



Anthracite

SEMI-TRANSPARENT VIEW



Sanicompact
Comfort

Sanicompact
Comfort+

TECHNICAL FEATURES

Number of available inlets	1
Ø of inlets	40 mm
Ø of recommended discharge pipe	32 mm
Flow rate	105 L/min
Power rating	550 W
Voltage	220-240 V/50 Hz
Electrical class	1
Noise level	51 dB(A)

COMFORT+



COMFORT+ BRACKET

