

## APPLICATIONS



Washbasin Shower cubicle

## PUMPING



## WARRANTY



## REFERENCE

EAN 3308815061016  
D6STD



# Sanishower Flat



Low starting level:  
30 mm.

Ultra-flat siphon compatible  
with most shower  
trays on the market.




Specific pump and  
plughole for flat shower tray.

Low shower tray: 8 cm.

Compact design  
for discreet installation.




### SEMI-TRANSPARENT VIEW

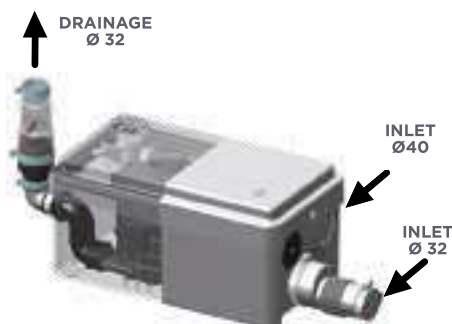

### TECHNICAL FEATURES

Activation height	30 mm
Shower tray height	8 cm
Max. flow	45 L/min
Number of inlets	2
Ø of inlets	32 mm (shower) 40 mm (sink)
Ø of discharge pipe	32 mm
Voltage	220-240 V/50Hz
Power rating	250 W
Max. absorbed intensity	1.3 A
Electrical class	1
Maximum temperature of incoming grey water	35 °C
Protection rating (IP)	IP44
Weight	3.7 kg

### PUMP PERFORMANCE CURVE

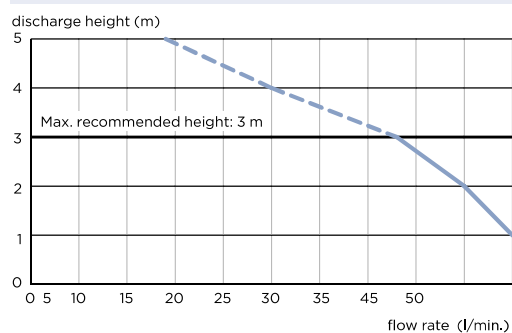

### PACKING LIST

- Specific Sanishower Flat pump + plughole
- Flexible discharge elbows
- Check valve

### INSTALLATION DIAGRAM

