



Sanispeed



Ideal for installing a professional kitchen.
Flow rate: 110 L/min.




Pump suitable for the installation
of a kitchen.

Water softener compatible.



APPLICATIONS



PUMPING



WARRANTY




REFERENCE

EAN 3308811579010
SSPSTD




SEMI-TRANSPARENT VIEW

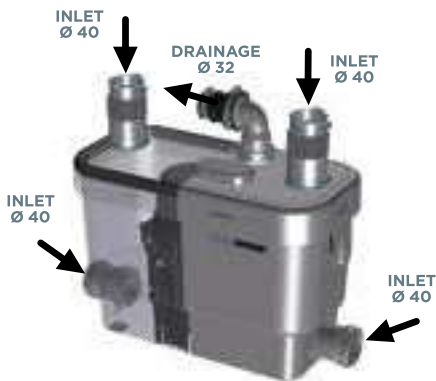

TECHNICAL FEATURES

Activation height	115 mm
Shower tray height	15 cm
Max. flow	110 L/min
Number of inlets	4
Ø of inlets	40 mm
Ø of discharge pipe	32 mm
Voltage	220-240 V/50 Hz
Power rating	400 W
Max. absorbed intensity	2 A
Electrical class	1
Maximum temperature of incoming wastewater	75°C intermittently (max. 5 min)
Protection rating (IP)	IP44
Weight	6.4 kg

PUMP PERFORMANCE CURVE

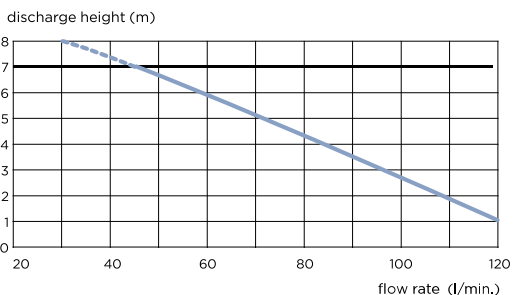

PACKING LIST

- Sanispeed
- Check valve
- Connectors
- Activated carbon filter included to neutralise odours

