

APPLICATIONS



Boiler



Air conditioner



Air conditioning box



Display



Dehumidifier

PUMPING

4.5 m




WARRANTY



REFERENCE

EAN 3308815083681
SK6ECO

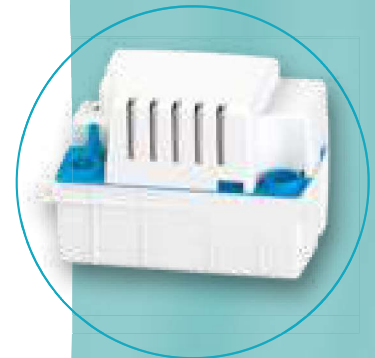

BOILER PUMPS

NEW

Sanicondens Eco



Flexibility: connections possible with gas and oil boilers (using Sanineutral or Sanineutral Mini), floor and wall mounted, refrigerated display cases, air conditioners, air conditioning boxes and dehumidifiers.

Easy installation:
supplied with check valve. Wall or floor fixing.
2 inlets available.



Compact design.

Quiet < 45 dB(A).

SEMI-TRANSPARENT VIEW




PACKING LIST

Sanicondens Eco

Check valve supplied

Supplied with: fixing screw, 1 inlet adaptor, 1 drainage hose (5 m) and a 1.5 m power cable, 1 outlet adaptor

PUMP PERFORMANCE CURVE

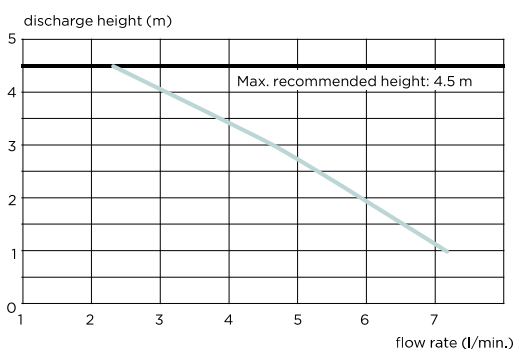

TECHNICAL FEATURES

Ø of inlets	28 mm
Number of available inlets	2
Ø of discharge pipe	10 mm
Tank volume	2.2 l
Maximum flow at 1 m	6.2 l/min
Maximum temperature of incoming water	80°C (S3 15%)
Max. power of the associated gas boiler	50 kW
Max. power of the associated oil boiler	30 kW
Voltage	220-240 V
Frequency	50 Hz
Max. absorbed power	60 W
Max. absorbed intensity	0.52 A
Electrical class	I
Protection rating (IP)	IP20
Weight	2 kg
Noise level	< 45 dB(A)

