



APPLICATIONS



Boiler



Dehumidifier

PUMPING

4.5 m



WARRANTY



REFERENCE

EAN 3308815081410
SK6N

Sanicondens Best Flat



Low 47 mm inlet for floor-standing boiler

Easy installation:
Complete installation kit
supplied with check valve.
Integrated neutralisation system.

Alarm pre-connection.



Integrated neutralisation system
to protect the pipes
from acid attacks.


Complete and compact system.

Quiet < 45 dB(A).

SEMI-TRANSPARENT VIEW



PUMP PERFORMANCE CURVE

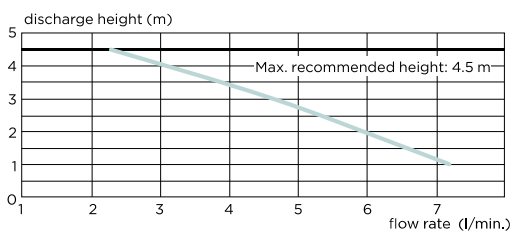

PACKING LIST

Sanicondens Best flat

Wall fixing - Check valve supplied

Delivered with: fixing screw, 1 inlet adapter,
1 outlet adapter (Ø 50 mm), 1 drainage hose, 5 m
int. Ø: 10 mm, a 1.5 m power cable, 1 alarm cable, 2 x
1.5 m strands, 1.2 kg neutralisation granules



Optional:
1.2 kg bottle of neutralisation
granules

Ref: SACHGRANULEEUR

Reference: EAN 3308815011134

