

APPLICATIONS



Individual



Commercial

DISCHARGE

11 m



WARRANTY



REFERENCE

EAN 3308815082851
COM1002



Sanicom 1



Pumping stations for grey water.

Simple and easy installation
without soil disbursement.

Inlets on each side of the device for
greater flexibility (ext. diameter 40).

Removable motor and level sensors
for ease of maintenance.



Compact design.

Ability to pump grey water
(except toilets) up to 90°C.

Forced motor start possible.




Wired audible and
visual alarm unit
5 m cable
(optional)

EAN 330881583384
BOITALARMCOM1002

SEMI-TRANSPARENT VIEW



PUMP PERFORMANCE CURVE

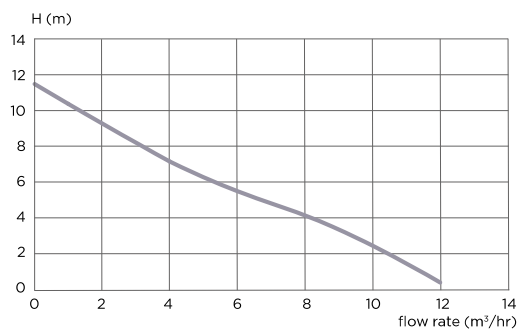

TECHNICAL FEATURES

TANK	
Tank volume	14 L
Ø of ext. inlets	2x 40 mm
Discharge diameter ext.	32 mm
Ventilation diameter	50 mm
ON/OFF level	135 mm / 50 mm
Shower tray height	25 cm minimum
Maximum temperature of incoming wastewater	90°C intermittently (max. 5 min)
Possible connections	Grey water from bathroom (without toilet), kitchen, laundry
Wheel type	Multi-channel
Solid handling capacity	8 mm
Voltage	220-240 V/50 Hz
Power rating	750 W
Max. absorbed intensity	3.3 A
Weight (including accessories)	10 kg
Protection rating (IP)	IPX4
Electrical class	I
PERFORMANCE	
Max. flow	12 m³/hr
Max. height (Q = 0 m³/hr)	11 m
Max. recommended height	8 m

PACKING LIST

1-pump lifting station
Built-in check valve

