



Sanicom 2



Pumping stations for grey water.
 Easy installation without soil disbursement.
 2 low side inlets Ø ext. 80
 (connections possible in Ø ext. 50 or
 Ø ext. 40).
 Removable motors and level sensors
 for ease of maintenance.



Compact design.
 Ability to pump grey water up to 90°C.
 Supplied with remote control unit:
 2 alternating pumps for more intensive use.
 Easy access and maintenance.

APPLICATIONS



Individual



Commercial

DISCHARGE

15 m



WARRANTY




REFERENCE


EAN 3308815082868
 COM2002



SEMI-TRANSPARENT VIEW

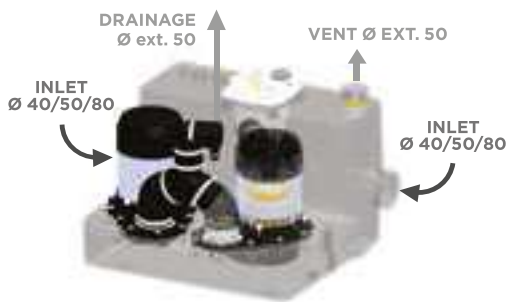

PUMP PERFORMANCE CURVE

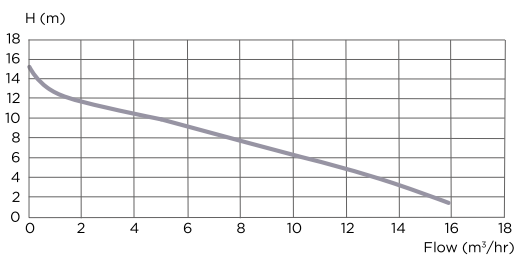

PACKING LIST

- 2-pump lifting station
- Remote control unit (2 m cable)
- 2 built-in check valves

TECHNICAL FEATURES

TANK	
Tank volume	34 L
Ø of ext. inlets	40, 50 and 80 mm
Discharge diameter ext.	50 mm
Ventilation diameter	50 mm
ON/OFF level	145 mm / 60 mm
Shower tray height	25 cm minimum
Maximum temperature of incoming wastewater	90°C intermittently (max. 5 min))
Possible connections	Grey water from bathroom (without toilet), kitchen, laundry
Wheel type	Multi-channel
Solid handling capacity	8 mm
Voltage	220-240 V/50 Hz
Power rating	2 x 1,500 W
Max. absorbed intensity	13 A
Weight (including accessories)	26 kg
Protection rating (IP)	IPX4
Electrical class	I
+ Option to connect an external alarm	

PERFORMANCE

Max. flow	16 m³/hr
Max. height (Q = 0 m³/hr)	15 m
Max. recommended height	10 m



Remote control unit
 (2 m cable)



Remote wired audible and visual alarm unit
 5 m cable (optional)
 EAN 330881584107
 BOITALARMCOM2002

