

APPLICATIONS



Individual



Commercial

DISCHARGE

22 to 39 m




WARRANTY



REFERENCES

See table right page

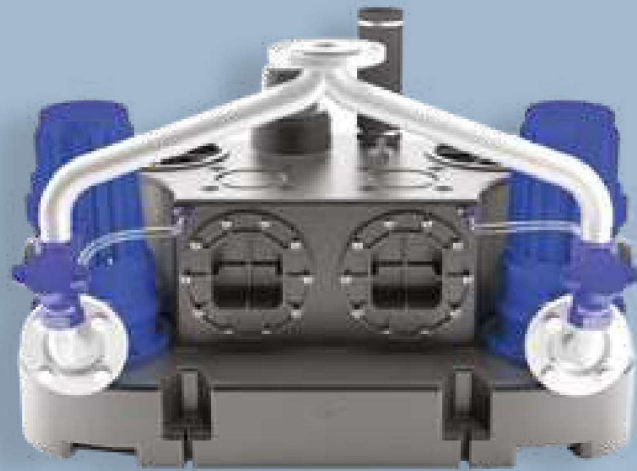

Sanicubic 2 GR




- Installation without clearance.
- Accessibility for maintenance purposes.
- Slicing wheels.
- 3 inlets DN 100, 2 inlets DN 50.

- 150 litre tank.
- 4 three-phase versions.
- Incl. non-return valve & outlet flange.



Pro X K3 Grinder


SEMI-TRANSPARENT VIEW

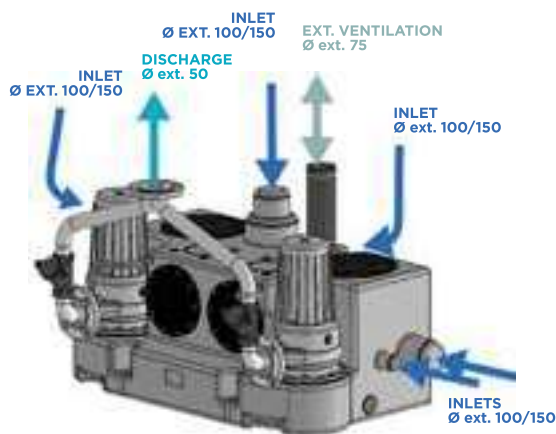

PERFORMANCE

TMH max.	39 m
Max. flow rate	17 m ³ /h

PUMP PERFORMANCE CURVE

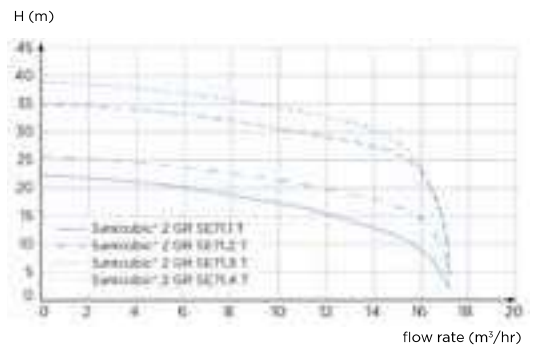

APPLICATIONS



Individual



Commercial

DISCHARGE


22 to 39 m



ZPS control box - two-pump versions

Pneumatically controlled remote control box including an audible and visual alarm.

DIMENSIONS

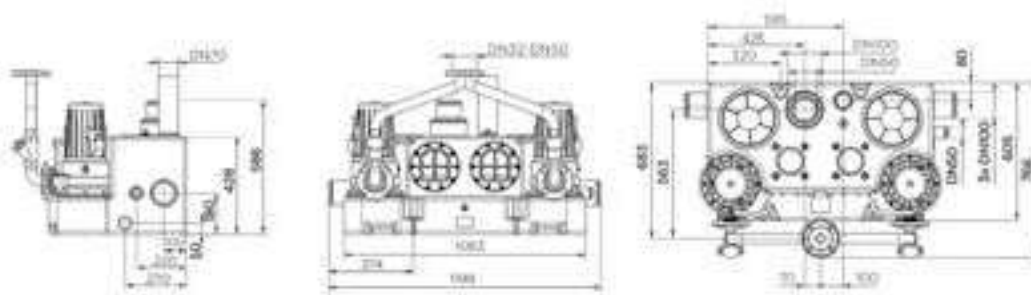

	SANICUBIC® 2 GR SE71.1 T	SANICUBIC® 2 GR SE71.2 T	SANICUBIC® 2 GR SE71.3 T	SANICUBIC® 2 GR SE71.4 T
Type of control box	ZPS 2 case	ZPS 2 case	ZPS 2 case	ZPS 2 case
MATERIALS				
Tank	PE LD	PE LD	PE LD	PE LD
Pump housing	GG-20	GG-20	GG-20	GG-20
Motor housing	GG-20	GG-20	GG-20	GG-20
Impeller	GG-20	GG-20	GG-20	GG-20
ELECTRICALS FEATURES				
Voltage (V)	400	400	400	400
Frequency (Hz)	50-60	50-60	50-60	50-60
Power consumption P1 (P=power) (W)	2100	2100	3900	3900
Power output P2 (P=power) (W)	1700	1700	3200	3200
Mode of operation	S3 25%	S3 25%	S3 25%	S3 25%
IP Rating	IP68	IP68	IP68	IP68
HYDRAULICS				
Total manometric head (m)	22	25	35	39
Max. flow rate (m³/h)	17	17	17	17
Inlet diameter DN	100, 150	100, 150	100, 150	100, 150
Discharge diameter DN	50	50	50	50
Ext.ventilation diameter (mm)	75	75	75	75
Total volume (L)	150	150	150	150
ON Level /OFF level (mm)	140-250/30	140-250/30	140-250/30	140-250/30
Alarm level (mm)	180-290	180-290	180-290	180-290
Max. temperature of the pumped liquid (5 min)	55°C	55°C	55°C	55°C
Type of wheel	Grinder	Grinder	Grinder	Grinder
Type of activation	Pneumatic	Pneumatic	Pneumatic	Pneumatic
IDENTIFICATION AND LOGISTICS				
Gross weight (kg)	137	137	144	144
EAN code	3308815079165	3308815079172	3308815079189	3308815079196
Factory code	CUBIC2GRSE71-1T	CUBIC2GRSE71-2T	CUBIC2GRSE71-3T	CUBIC2GRSE71-4T

(DN=nominal diameter)