

APPLICATIONS



Individual

DISCHARGE

13 m



WARRANTY



REFERENCE

Sanicubic 1

EAN 3308815074429

CUBIC1NM



Sanicubic 1

Sanicubic 1

Sanicubic 1 WP



Pro X K2 grinding technology drains wastewater through a 50 mm ext. diameter hose

Removable motor and level sensors for ease of maintenance.

IP68 reinforced seals and remote control (WP version).



Compact design.

4 inlets, including 2 low ones, for greater installation flexibility.

Discreet installation (drainage Ø ext 50 mm).

Secure operation with the audio and visual alarm box.



Wired audible and visual alarm unit (5 m cable)



Pro X K2 knife





APPLICATIONS



Individual

DISCHARGE

13 m



WARRANTY



REFERENCE

Sanicubic 1 WP with standard control unit
EAN 3308815074436
CUBIC1IP68NM



Remote control unit
(4 m cable)



Wired audible and visual alarm unit
(5 m cable)

ACCESSORIES

GATE VALVES

Guillotine valves for inlet pipes

To comply with the regulations and to facilitate maintenance operations, gate valves must be installed on the effluent inlets as well as on the drainage pipe.

For pipe diameter 50

Reference: EAN 3308815061030 DN50

For pipe diameter 110 or 100 (with reducer)

Reference: EAN 3308815061023 VANNEDN100



ACTIVATED CARBON FILTER

Neutralises odours.


Reference: FILTRECUBICSFA

EAN 3308815077529




GATE VALVES AND CARBON FILTER AVAILABLE IN ACCESSORIES

SEMI-TRANSPARENT VIEW

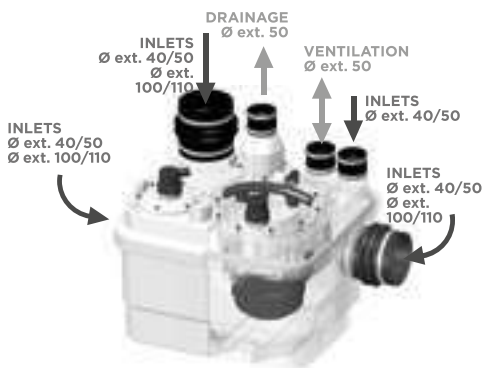

PUMP PERFORMANCE CURVE

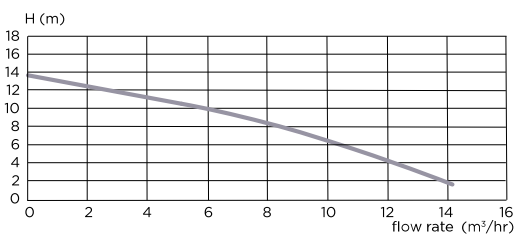

PACKING LIST

- 1 motor lifting station
- Built-in check valve
- Alarm unit
- Remote control unit (WP version)

TECHNICAL FEATURES

Tank volume	32 L
Ø of ext. inlets	• 1 inlet 40/50 mm • 3 inlets 40, 50, 100, 110 mm
Discharge diameter ext.	50 mm
Ventilation diameter	50 mm
Maximum temperature of incoming wastewater	70°C intermittently (max. 5 min)
Possible connections	Black water from several toilets, grey water from bathroom, kitchen, laundry
Wheel type	Grinder
Voltage	220-240 V/50 Hz
Power rating	1 x 500 W
Max. absorbed intensity	6 A
ON/OFF level	140/70 mm
Alarm level	210 mm
Weight (including accessories)	Sanicubic 1: 19.8 kg Sanicubic1 WP: 23 kg
Protection rating (IP)	Sanicubic1: IP67 Sanicubic1 WP: IP68
Control unit protection rating (IP)	IPX4
Electrical class	I

PERFORMANCE

Max. flow	15 m³/hr
Max. height (Q = 0 m³/hr)	13 m
Max. recommended height	11 m

CONNECTION POSSIBILITIES

