



Sanisub 400



- Submersible pump.
- Automatic release.
- Built-in check valve.
- Sucks up to 5 mm without suction strainer.
- Floating ring seal provided.

APPLICATIONS



Individual

PUMPING

7.5 m



WARRANTY



REFERENCE

EAN 3308815081632
SANISUB-005

CELLAR PUMPS



Floating ring seal provided.

APPLICATIONS


Emergency pumping

Drainage of cellars, water pumping from sumps and garages

PERFORMANCE

Max. height	7.5 m
Max. flow	7 m ³ /hr

PUMP PERFORMANCE CURVE

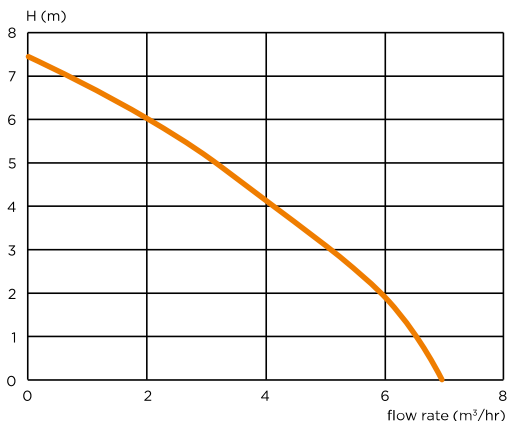

FEATURES

- Jacket cooled submersible pump for clear water
- Made from polypropylene and stainless steel
- Discharge pipe diameter 1 1/4"
- 7 m immersion depth
- Solid handling capacity 10 mm
- T° max. acceptable at 5 minute intervals: 70 °C
- Multi-channel wheel

PACKING LIST

- Sanisub 400 pump
- 10 m power cable
- 90° connection elbow with check valve
- Floating ring seal

REFERENCE	U (V)	P1 (W)	P2 (W)	FREQUENCY (HZ)	I MAX (A)	TR/MN	PROTECTION RATING (IP)	Q MAX (M ³ /HR)	H MAX (M)	WEIGHT (KG)
Sanisub 400	230	400	180	50-60	1.4	2800	IP68	7	7.5	4.6