

APPLICATIONS



Individual

PUMPING

7.5 m



WARRANTY



References:

Sanisub ZPK 30 A
EAN 3308815081434
SANISUB-001

Sanisub ZPK 40 A
EAN 3308815081441
SANISUB-002



Sanisub ZPK



Portable pump.

Automatic release by adjustable float.

Solid handling capacity from 10 to 30 mm.

Built-in check valve.



APPLICATIONS

Portable pump for emergency pumping

Pumping clear water from cellars, garages, rainwater manholes, etc.

Drainage of grey household water without faeces (showers, washing machines, sinks, etc.)

FEATURES

Submersible pump for grey water, made from polypropylene and stainless steel

Discharge pipe diameter 1 1/4"

Fixable or spare float switch as standard


5 m immersion depth

Solid handling capacity of 10 mm for ZPK 30 A, 30 mm for ZPK 40 A

T° max. acceptable at 5 minute intervals: 90 °C

Multi-channel wheel

PUMP PERFORMANCE CURVE

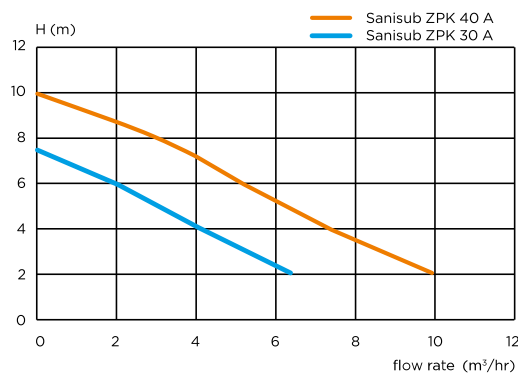

PERFORMANCE

Max. height 10 m

Max. flow 10 m³/hr

PACKING LIST

Sanisub ZPK pump

90° connection elbow (30 A DN 25, 40 A DN 32) with check valve

10 m power cable with plug

REFERENCE	U (V)	P1 (W)	P2 (W)	FREQUENCY (HZ)	I MAX (A)	TR/MN	PROTECTION RATING (IP)	Q MAX (M³/HR)	H MAX (M)	WEIGHT (KG)
Sanisub ZPK 30 A	230	300	130	50-60	1.3	2800	IP68	7	7.5	4.5
Sanisub ZPK 40 A		850	430		3.7			10	10	6.5