



Sanisub S ZPK



- Portable pump for chemical aggressive or saline water (max. salt content 15%).
- Automatic release by adjustable float.
- Solid handling capacity from 10 to 30 mm.
- Built-in check valve.

APPLICATIONS



Individual

PUMPING

10 m



WARRANTY



References:

Sanisub S ZPK 30 A
EAN 3308815081458
SANISUB-003

Sanisub S ZPK 40 A
EAN 3308815081465
SANISUB-004



APPLICATIONS


Portable pump for emergency pumping

Drainage of brine water from softeners and corrosive or saline water (max. 15%)

Pumping clear water from cellars, garages, rainwater manholes, etc.

Drainage of grey household water without faeces (showers, washing machines, sinks, etc.)

PUMP PERFORMANCE CURVE

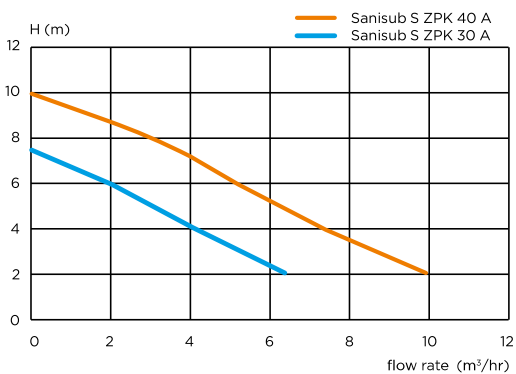

FEATURES

Submersible pump for grey water, made from polypropylene and stainless steel

Discharge pipe diameter 1 1/4"

Fixable or spare float switch as standard

Mechanical lining in silicon carbide and stainless steel 316 L crankcase

5 m immersion depth

Solid handling capacity of 10 mm for S ZPK 30 A, 30 mm for S ZPK 40 A

T° max. acceptable at 5 minute intervals: 90 °C

Multi-channel wheel

PERFORMANCE

Max. height 10 m

Max. flow 10 m³/hr

PACKING LIST

Sanisub S ZPK pump

90° connection elbow (30 A DN 25, 40 A DN 32) with check valve

10 m power cable with plug

REFERENCE	U (V)	P1 (W)	P2 (W)	FREQUENCY (HZ)	I MAX (A)	TR/MN	PROTECTION RATING (IP)	Q MAX (M³/HR)	H MAX (M)	WEIGHT (KG)
Sanisub S ZPK 30 A	230	300	130	50-60	1.3	2,800	IP68	7	7.5	4.5
Sanisub S ZPK 40 A		850	430		3.7			10	10	6.5