

APPLICATIONS



Individual

PUMPING

7.5 m



WARRANTY



REFERENCE

EAN 3308815082639
SANISUBSTEEL-101



Sanisub Steel

—AND EMERGENCY KIT



- Submersible pump.
- Automatic release.
- Optimised motor cooling.
- Complete kit.



Pump only reference:

EAN 3308815081700
SANISUBSTEEL-001

APPLICATIONS

Emergency pumping


For lightly soiled clear water

For water discharge from ponds, tanks and flooded cellars

PERFORMANCE

Max. height	8 m
Max. flow	9 m ³ /hr

PUMP PERFORMANCE CURVE

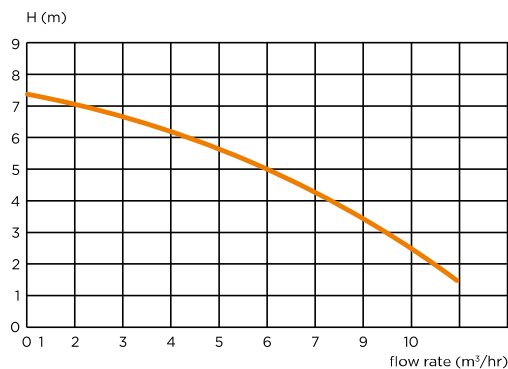

FEATURES

- Portable design in stainless steel
- Integrated motor protection
- Modular release thanks to the cable tie eyelet on the float
- Discharge pipe diameter 1 1/4"
- 5 m immersion depth
- Solid handling capacity 10 mm
- T° max. acceptable at 5 minute intervals: 70 °C
- Multi-channel wheel

PACKING LIST

- Stainless steel pump
- Basket with fixing kit
- Retaining cannula
- 15 m drain hose with quick symmetrical connectors
- 10 m power cable

REFERENCE	U (V)	P1 (W)	FREQUENCY (HZ)	I MAX (A)	TR/MN	PROTECTION RATING (IP)	Q MAX (M ³ /HR)	H MAX (M)	WEIGHT (KG)
Sanisub STEEL EMERGENCY KIT	230	450	50-60	2	2,800	IP68	9	8	13