

APPLICATIONS



Individual

DISCHARGE

14 m



WARRANTY



REFERENCES

Sanipump
Single-phase
Grinder
EAN 3308815074610
POMPIMMERGE

Sanipump
Single-phase
Vortex
EAN 3308815076201
POMPIMMERGEVORTEX



Sanipump Vortex installed in a sump

Sanipump



Wastewater pumping

Easy installation:
Lightweight: only 13 kg. Compactness, stability.



Autonomous
pump operation.

Float activation system
Max. temperature of incoming water: 70°C

TECHNICAL FEATURES

Discharge diameter ext.	DN 40 (GR) DN 50 (VX)
ON/OFF level	400/100
Voltage	230 V / 50-60 Hz
Consumption	1500 W
Immersion depth	5 m

PERFORMANCE

Sanipump GR (grinding)


Max. flow	11 m ³
Max. height	14 m

Sanipump VX (Vortex)


Max. flow	27 m ³
Max. height	13 m

DIMENSIONS

Sanipump Vortex

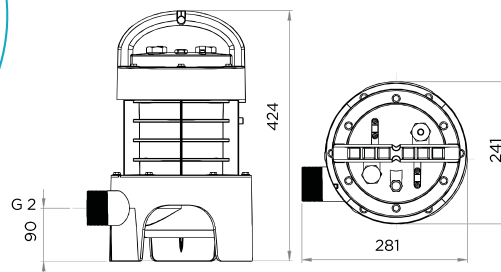

Sanipump Grinder



GRINDER OR VORTEX MODEL



KX V6 Vortex
Wheel



Pro X K2
knife

PUMP PERFORMANCE CURVES

