



MACERATORS & PUMPS

CATALOGUE
2021



Contents

- 4 | SFA INFORMATION AND WORLDWIDE PRESENCE
- 7 | FOCUS ON OUR SOLUTIONS
- 8 | OUR MACERATING TECHNOLOGIES



10

MACERATOR PUMPS



24

TOILETS WITH INTEGRATED MACERATORS



36

GREY WATER PUMPS

- 9 | MACERATOR INSTALLATION RULES
- 12 | Saniflo
- 13 | Sanitop
- 14 | Sanipro XR
- 15 | Saniplus
- 16 | Sanibest Pro
- 17 | Sanigrind Pro
- 18 | Saniwall Pro UP
- 20 | Sanipack
- 21 | Saniaccess 1•2•3
- 22 | ACCESSORIES
- 23 | DIMENSIONS

-
- 26 | THE ECO+ SYSTEM
 - 27 | HOW TO INSTALL A COMPACT MODEL
 - 28 | Sanicompact 43
 - 29 | Sanicompact Pro
 - 30 | Saniflush
 - 31 | Sanismart
 - 32 | Sanicompact Comfort
 - 33 | Sanicompact Comfort + /Bracket
 - 34 | DIMENSIONS

-
- 38 | Sanifloor + 1•2•3
 - 40 | Sanishower Flat
 - 41 | Sanishower
 - 42 | Sanivite
 - 43 | Sanispeed
 - 44 | Saniaccess Pump
 - 45 | INSTALL YOUR SHOWER ANYWHERE
 - 46 | DIMENSIONS

- 50 | Sanipuddle
- 51 | Sanisub 400
- 52 | Sanisub ZPK
- 53 | Sanisub S ZPK
- 54 | Saniwell
- 56 | Sanisub Steel
- 57 | DIMENSIONS



48

CELLAR PUMPS

- 60 | Sanicondens Clim Mini / Pack
- 61 | Sanicondens Clim Deco

NEW



58

CONDENSATE PUMPS FOR AIR CONDITIONERS

- 64 | Sanicondens Deco +
- 65 | Sanicondens Eco
- 66 | Sanicondens Pro
- 67 | Sanicondens Best Flat
- 68 | Sanineutral Mini
- 69 | Sanineutral
- 70 | DIMENSIONS

NEW

NEW



62

BOILER CONDENSATE PUMPS

- 74 | Sanigrease T
- 75 | Sanigrease T 24
- 76 | Sanigrease S
- 77 | DIMENSIONS



72

GREASE TRAPS AND SEPARATORS

- 82 | Sanicom 1
- 83 | Sanicom 2
- 84 | Sanicubic 1
- 85 | Sanicubic 1 WP
- 86 | Sanicubic 2 Classic
- 87 | Sanicubic 2 Pro
- 88 | Sanicubic 1 GR
- 90 | Sanicubic 2 GR
- 92 | Sanicubic 1 VX
- 94 | Sanicubic 2 VX
- 96 | Sanicubic 1 SC
- 98 | Sanicubic 2 SC
- 100 | DIMENSIONS



78

FLOOR-STANDING LIFTING STATIONS

- 104 | Sanipump
- 105 | Sanifos 110
- 106 | Sanifos 280
- 108 | Sanifos 610 & 610 SL
- 110 | Sanifos 1 300
- 112 | Sanipump SLD
- 114 | Sanipump ZPG 71
- 116 | Sanipump ZFS 71
- 118 | DIMENSIONS
- 119 | ETHICS CHARTER

NEW

NEW



101


UNDERGROUND LIFTING STATIONS

SFA Group World leader in sanitary equipment

For over 60 years, the companies of the SFA Group have been working to provide our professional and end consumer customers with increasing levels of sanitary convenience in their daily lives.

An International Group

Established in 25 countries across 5 continents, the Group continues to expand internationally through partnerships forged with professionals in the sector, carefully selected and trained to carry forward the reputation for performance, quality and service of the international Group.

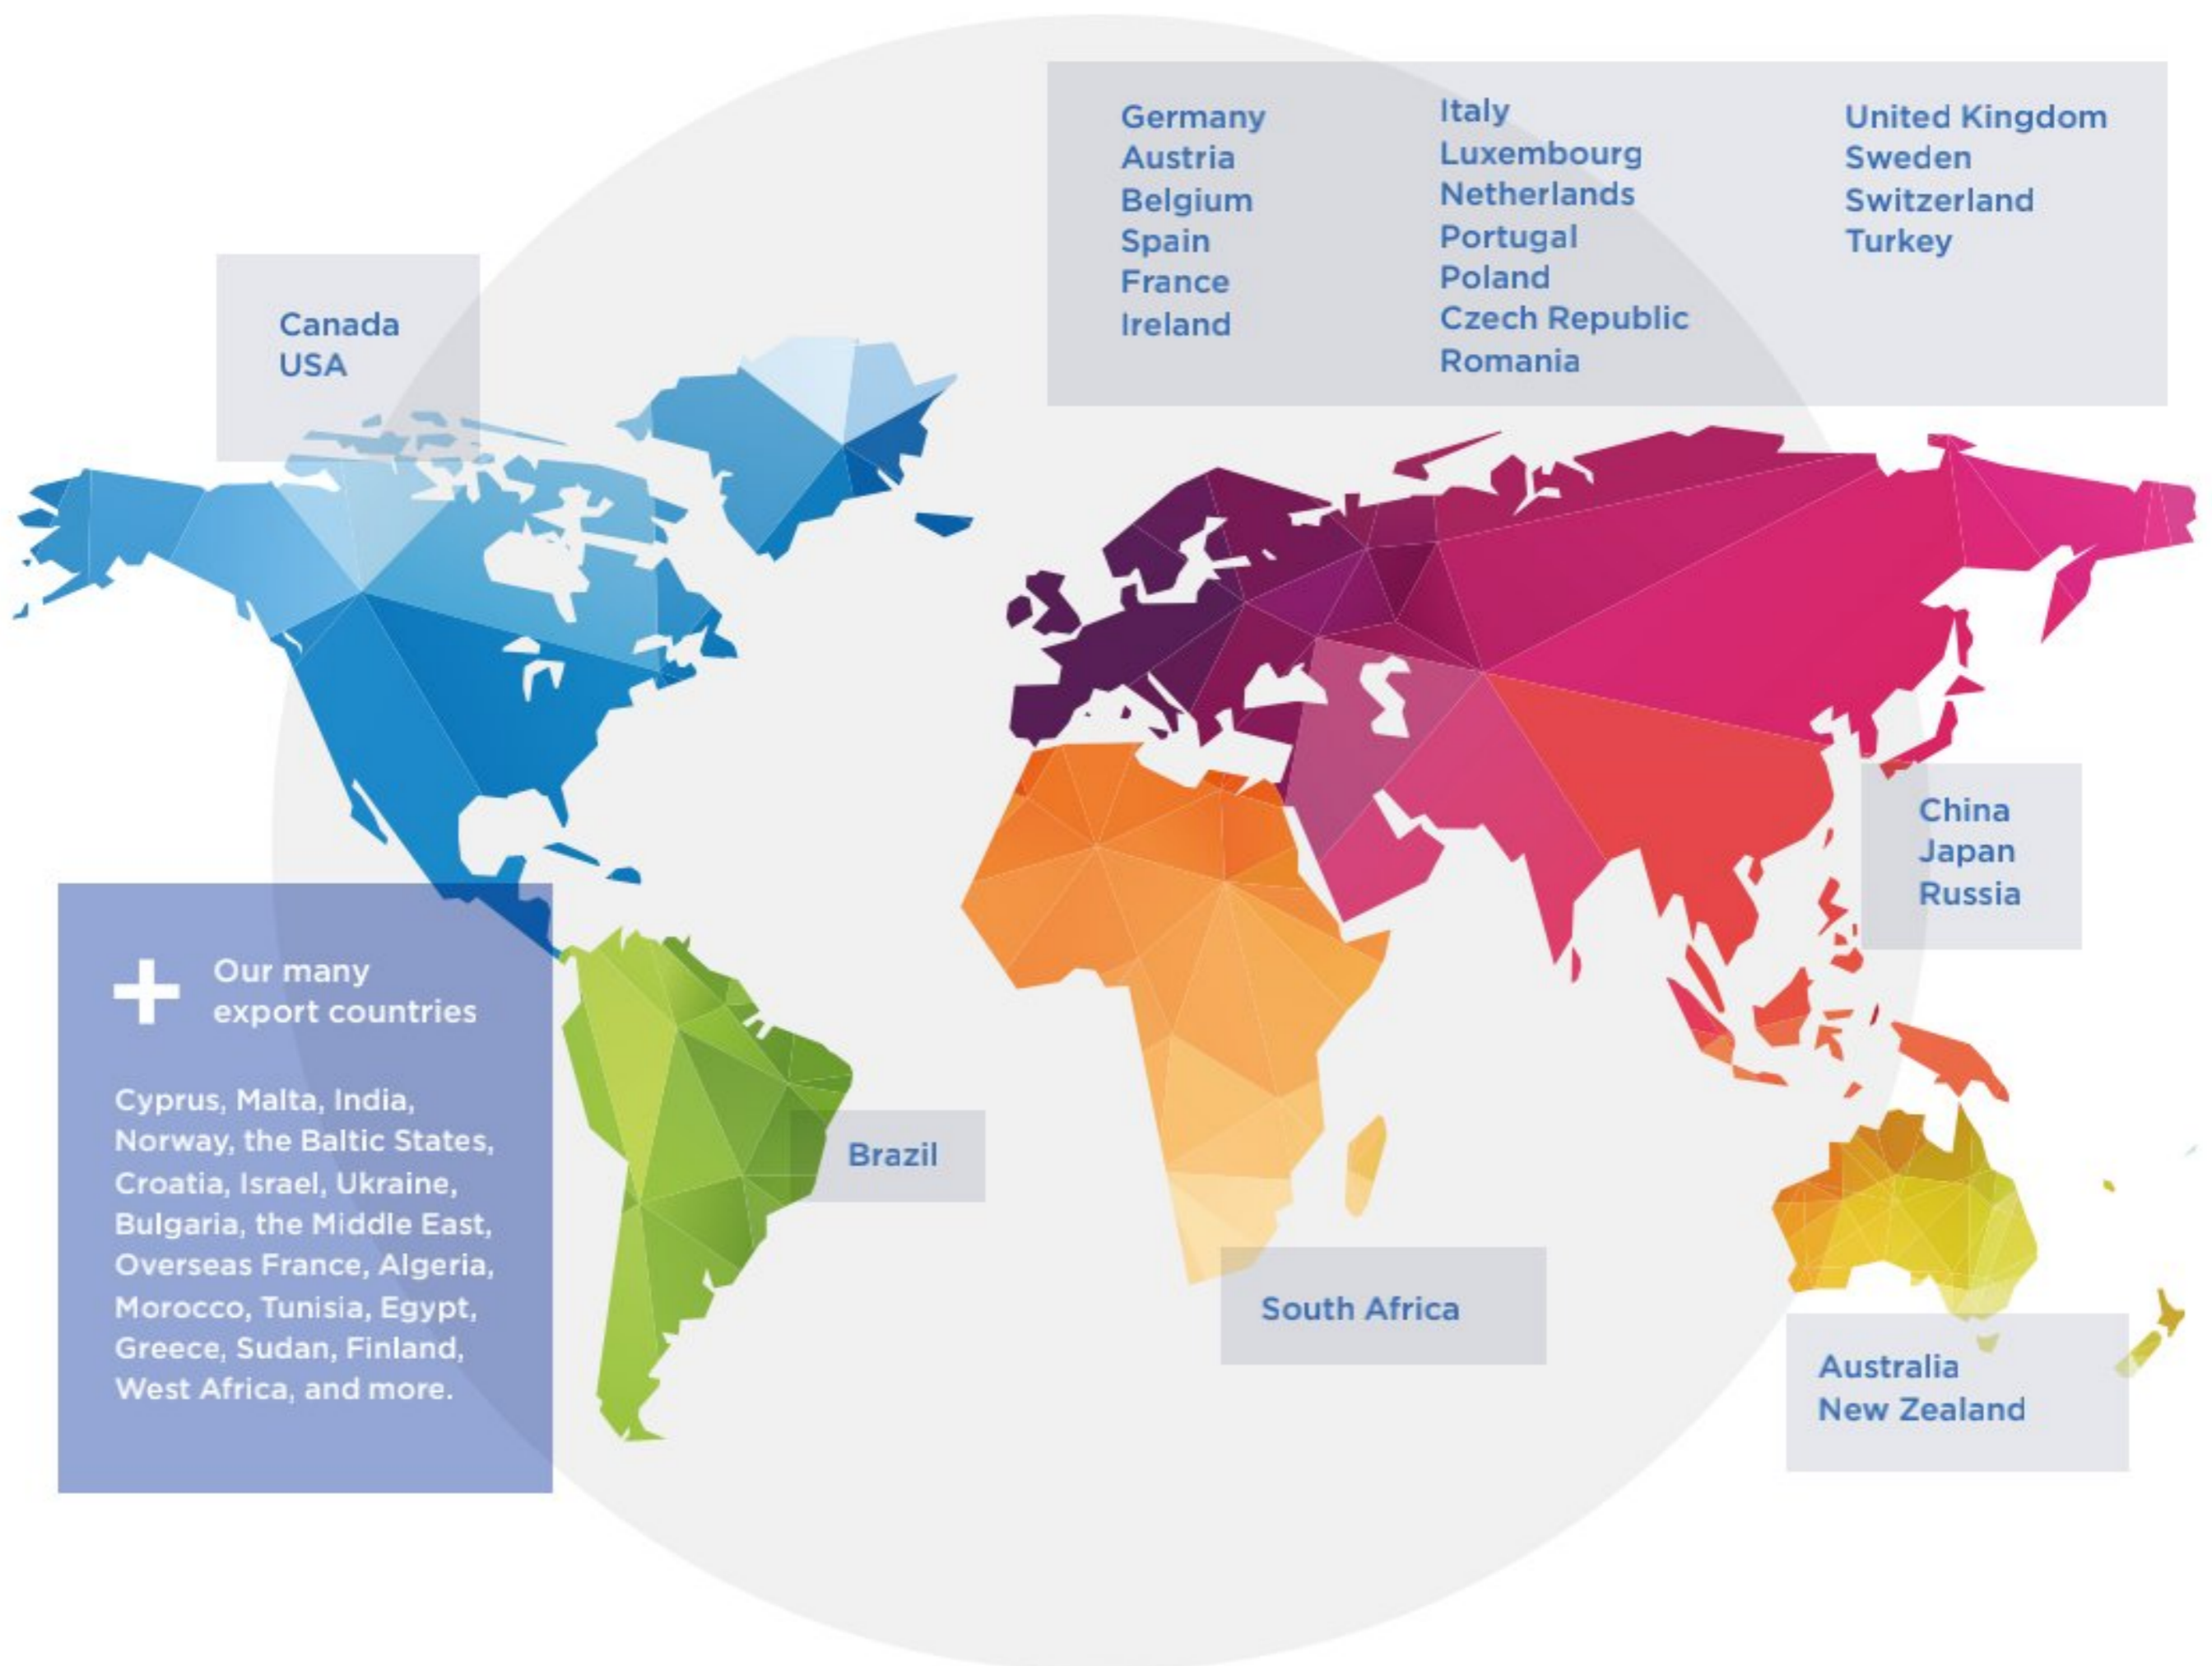

This is the very hallmark of the SFA Group!

It was this attitude and approach that brought about the release of the first Sanibroyeur in 1958. A brilliant idea that continues to revolutionise interior design around the world. This expertise in solutions has been put to use for many years, providing invaluable assistance across a wide variety of sectors.

The SFA Group operates in 4 areas of activity:

- Domestic pumping solutions
- Professional pumping solutions
- Equipment for showers, balneotherapy and spas
- Water treatment.

Vision & Perspectives

The Group's activity around pumps and pumping stations clearly illustrates its external growth policy.

This policy approach aims to protect and enhance expertise and resources. An initiative that builds a homogeneous block performing at an extremely high growth capacity.

By bringing in a technical expert like Zehnder Pumpen, recognised and well regarded in the market and a global player with a presence in over 70 countries, SFA has created the conditions to develop its innovation ability, reinforce its manufacturing base and ensure strong growth in this segment.

1958

SFA founded
and the 1st toilet macerator.
Europelec acquisition

1970

Expansion into Europe
and North America

1988

Kinédo purchase

1990

ISO certification of factories

1993

Grandform joins the group

2019

Zehnder Pumpen purchase

2020

New visual image
Format and Aquaturbo
Systems purchase

SFA solutions are synonymous with quality, design and technology.

Throughout its history, SFA has established a high-performing manufacturing base, opting for an integrated production strategy to build and assemble its equipment in record time. Its industrial model ensures complete control of each stage of production, quality control and manufacturing deadlines. This guarantee of reliability and trust is appreciated by its clients. The Group's commitment to quality is recognised internationally by independent laboratories. Each factory complies with the required standards of the certifications applicable in every country where its products are sold:

- CE marking in Europe • CSA certification marks in North America
- PCT certification in Russia • JET standard in Japan



BRÉGY
FRANCE



GRÜNHAIN-BEIERFELD,
GERMANY

Every day, some 300 employees work to bring our company values to life, to make things easier for our customers and our installers. Over the years, numerous investments have taken Brégy from being a simple assembly site to a largely self-sufficient production centre. To guarantee product quality from start to finish, we have vertically integrated the manufacturing of many components into our own production process. Our 25 000 sqm factory is divided into four units to manage the production of composite and rubber parts, the manufacture of motors, the assembly of components and the creation of electronic components.

The Zehnder Pumpen company, purchased by SFA in 2019, has established itself as a recognised specialist brand in the production of submersible pumps, garden pumps, wastewater pumping stations, automatic domestic water dispensers or domestic water networks.

Historically, our two entities share the values of the French flagship of the sanitary industry: innovation, reliability, durability and performance.

2-YEAR WARRANTY


SFA pumps and macerators meet the European standards currently in force (EN 12050-3, EN 12050-2 and EN 12050-1) and are produced in a factory ISO 9001 and ISO 14001 certified.



What is a SANIFLO SOLUTION?

To adapt to the different stages of life, it may be necessary to modify and change your house by building an extension, or by adding an en-suite, additional bathroom or utility facilities. Saniflo products make it possible to carry out installation easily and without undertaking major building work.

If the additional new room is located at a distance from the main drainage system, perhaps in the attic, garage or in the basement, it is often easier and cost effective to use small bore pipework to create this new space rather than having to do major building work to connect to the main sewer.

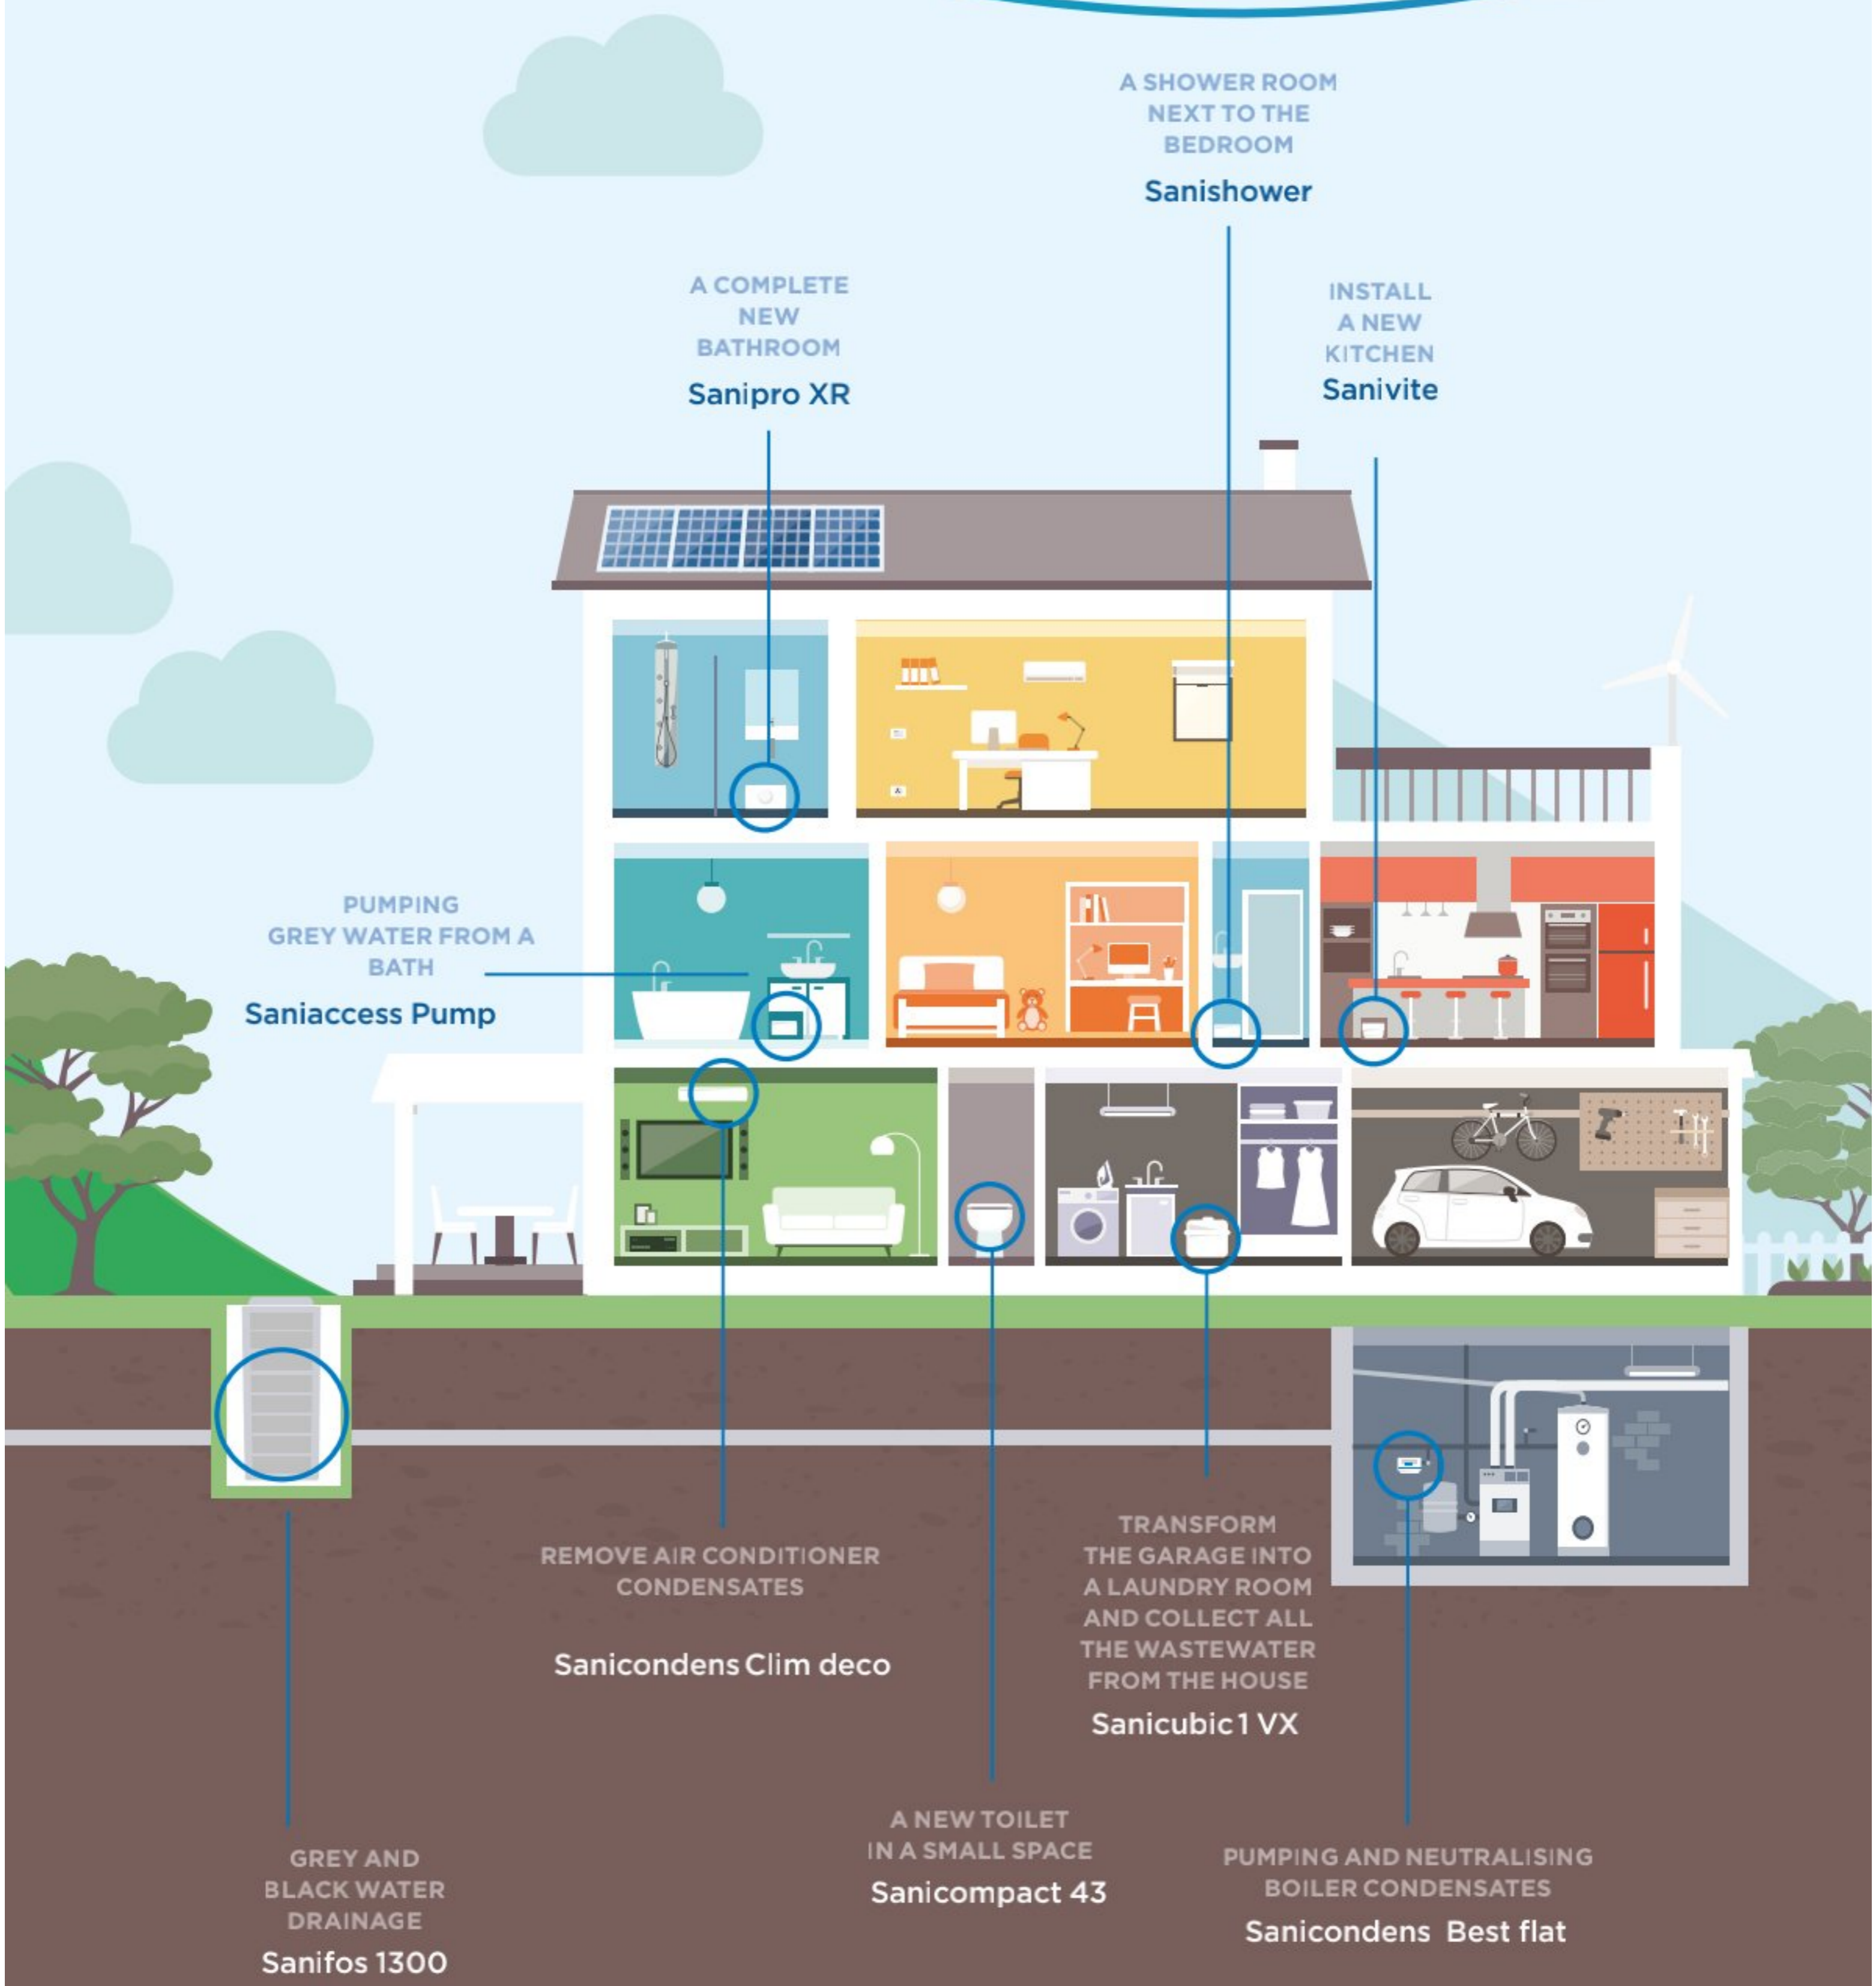


SFA macerators have remained at the forefront of technology since their invention, thanks to the group's continuous research and development efforts. Noise level, accessibility and design are all key elements to meet the needs of our customers.

OUR GRINDING TECHNOLOGIES

Single-blade cutter

The single-blade cutter reduces the black waste into fine particles. The rotating steel blade cuts through waste materials and discharges the water and waste at the same time.

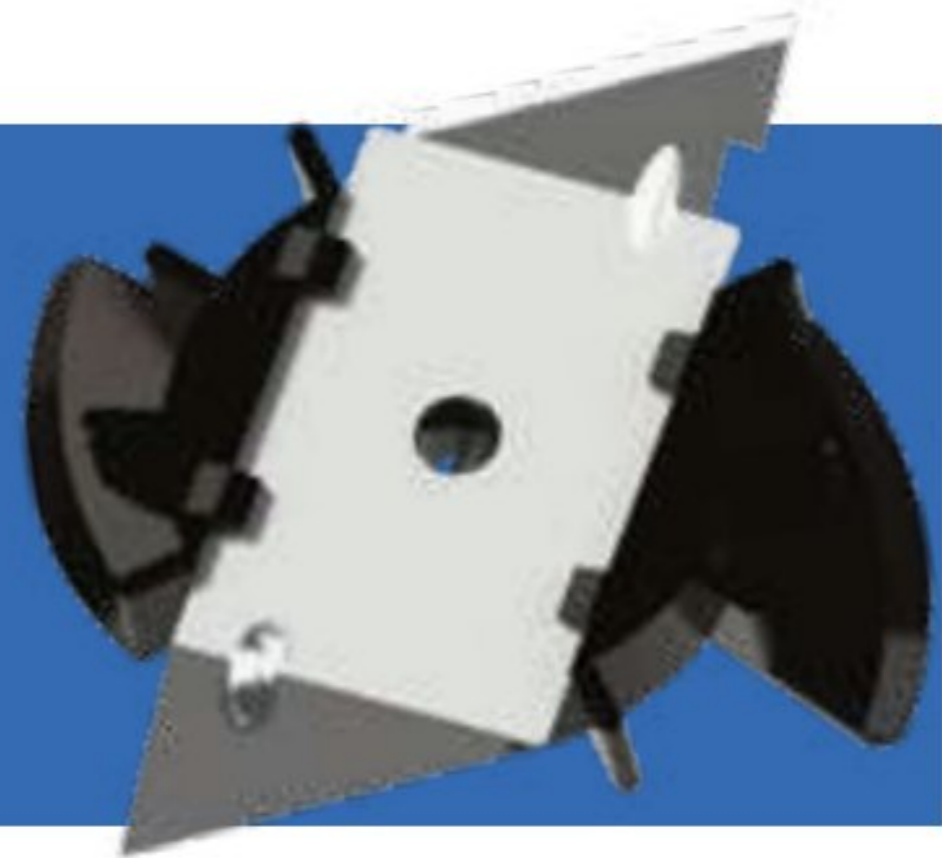


Multi-cutter disc

The multi-cutter disc uses a shredding action and acts as a turbine. This technology is available in the Sanicompact.

Pro X K2 impeller

The pro X K2 impeller is a more robust blade and has been designed to deal with the occasional obstruction such as a wet wipe, tampon, sanitary towel or condom.

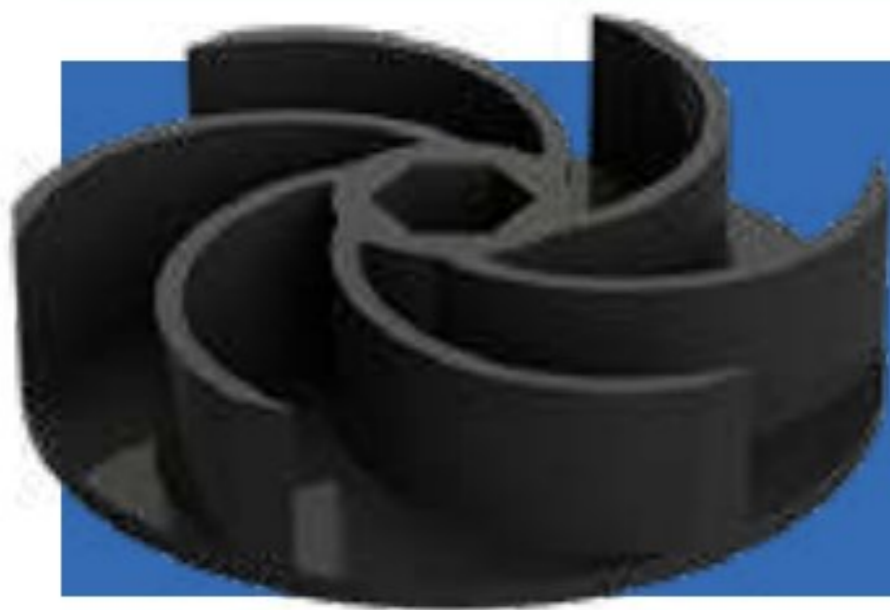

KX V6 Vortex impeller

SFA also has vortex technology. This technology is able to deal with particles of up to 50 mm, to meet the most demanding applications and creates a centrifugal action rather than a cutting blade.

Two-channel wheel

The two-channel wheel sucks out and discharges grey water and particles without grinding them and provides 50 mm clearance for maximum performance.






SOME RULES FOR INSTALLING AN SFA MACERATOR




For the installation of connection elbows on the drainage piping, use 2 x 45° elbows rather than one 90° elbow. **The larger radius curves DECREASE the discharge losses.**



• If the discharge takes place in a direct downwards way, **provide for an aerator valve placed at the highest point to avoid the siphoning phenomenon.**

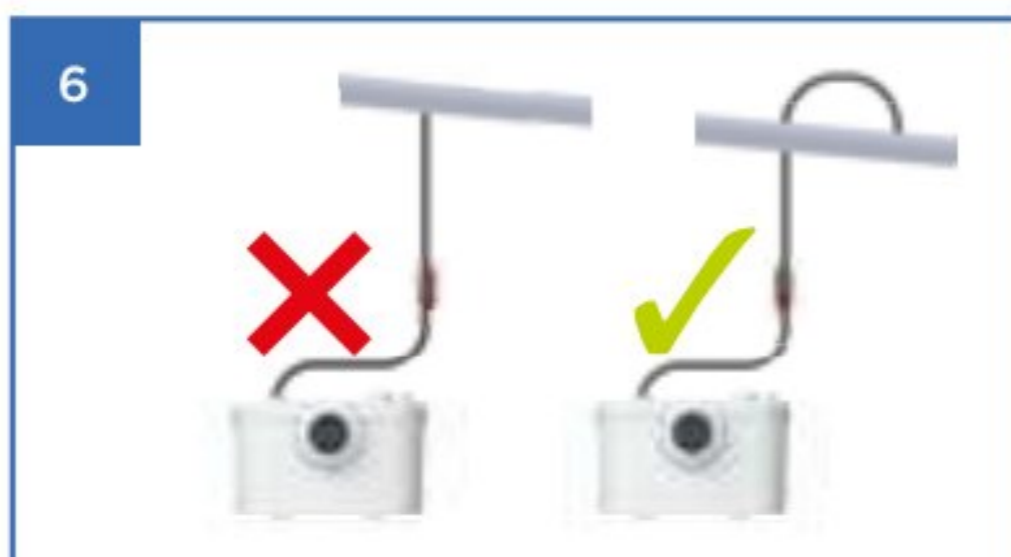

The macerator discharge pipe must be connected to the downspout **from above, following the direction of flow.**

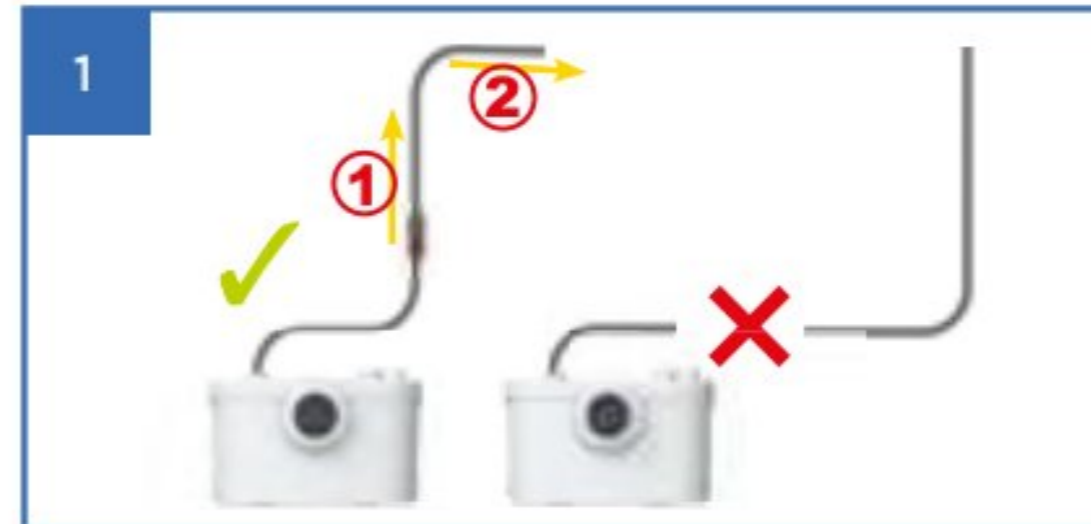

Vertical pumping must take place at the start of the DISCHARGE (1). **From the highest point of the discharge (2), an incline of at least 1% is necessary.**



Plan for a slope between the sanitary appliances and the SFA macerator.



The appliance must not be installed **more than 20 cm behind the toilet, nor at a lower level than the bowl.**



No sanitary appliance must be connected to the small diameter drainage pipe **specific to the macerator.**



WHY SANIFLO?

The SFA Saniflo range for creating sanitary fixtures anywhere and without any major works.

For over 60 years, SFA has offered wastewater pumping solutions to facilitate property development.

Installing an SFA macerator lets you create sanitary fixtures anywhere in the house, even without gravity drainage!

A water supply, a small diameter discharge pipe and an electrical socket are all you need to install an SFA macerator.

BEFORE



AFTER



Saniflo®

	Toilet	Wall-hung toilet	Wash basin	Bidet	Shower cubicle	Collectivity	Easy operation
<p>Saniflo Perfect for toilet drainage</p> <p>p.12 •</p>							✓
<p>Sanitop Drains both the toilet and washbasin</p> <p>p.13 •</p>			•				✓
<p>Sanipro XR Drains all the water from a shower room</p> <p>p.14 •</p>			•	•	•		✓
<p>Saniplus Large capacity tank: perfect for handling large volumes of water</p> <p>p.15 •</p>			•	•	•		✓
<p>Sanibest Pro High performance maceration! Perfect for communities</p> <p>p.16 •</p>			•	•	•	•	✓
<p>Sanigrind Pro The unique solution for S-trap toilets</p> <p>p.17 •</p>			•	•	•	•	✓
<p>Saniwall Pro UP The solution (macerator + GROHE support frame) for installing a wall-hung bowl. Available as a glass-clad version or tiled</p> <p>p.18 •</p>		•	•	•	•		✓
<p>Sanipack The macerator for wall-hung bowls that fits in partitions</p> <p>p.20 •</p>		•	•	•	•		✓
<p>Saniaccess 1-2-3 Complete solutions perfect for rental accommodation</p> <p>p.21 •</p>			•	•	•		✓

- RELIABILITY AND INNOVATION SINCE 1958
- EASY MAINTENANCE THANKS TO DIFFERENT ACCESS POINTS
- SLEEK DESIGN
- THE QUIETEST RANGE ON THE MARKET

APPLICATIONS



Toilet

PUMPING



WARRANTY



REFERENCE

EAN 3308811299017
SXSTD



Saniflo



Easy installation:
Easy replacement of an old model
Perfect for draining water from a toilet.



Suitable for use in a basement
or loft conversion.
Quiet product.



TECHNICAL VIEW




TECHNICAL FEATURES

Number of available inlets	1
Ø of inlets	100 mm
Ø of recommended discharge pipe	22/32 mm
Power rating	400 W
Voltage	220-240 V/50Hz
Electrical class	1
Protection rating (IP)	IP 44

PACKING LIST

- Saniflo
- Check valve
- Connectors
- Activated carbon filter included to neutralise odours

PUMP PERFORMANCE CURVE

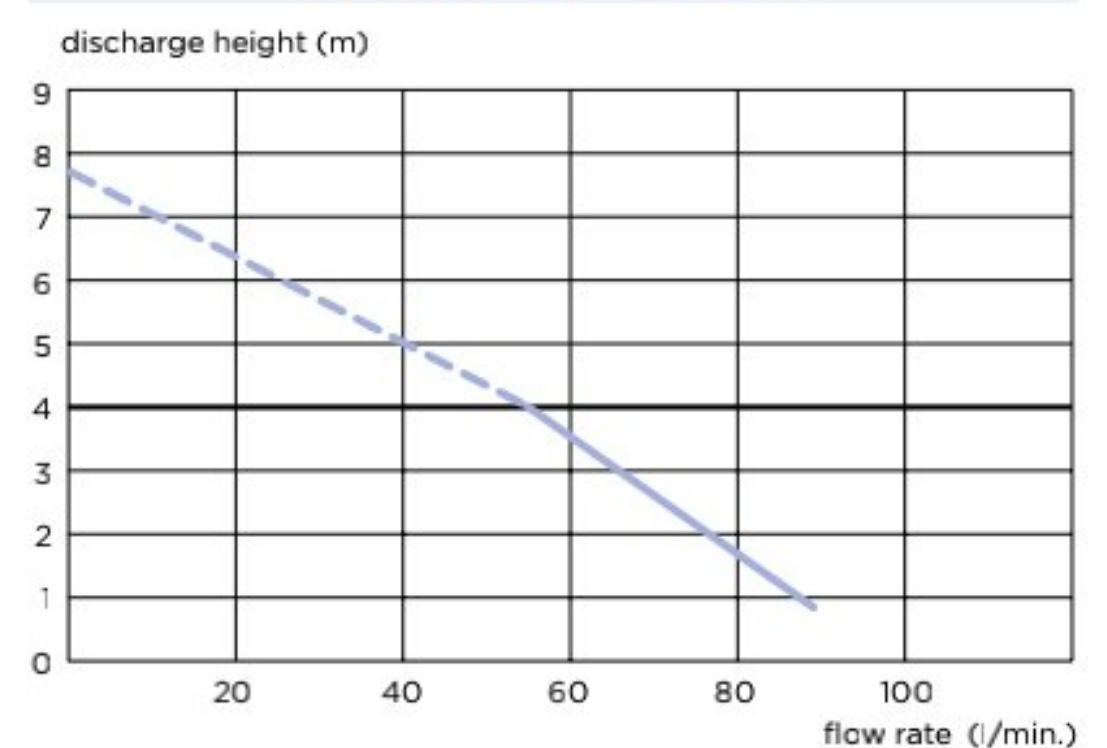

APPLICATIONS



PUMPING



WARRANTY



REFERENCE

EAN 3308811399014
ST2STD



Sanitop



Easy installation:
Easy replacement of an old model.



Lets you install 1 toilet + 1 washbasin.

Quiet product.



TECHNICAL VIEW




TECHNICAL FEATURES

Number of available inlets	2
Ø of inlets	100/40 mm
Ø of recommended discharge pipe	22/28/32 mm
Power rating	400 W
Voltage	220-240 V/50 Hz
Electrical class	1
Protection rating (IP)	IP44

PACKING LIST

- Sanitop
- Check valve
- Connectors
- Activated carbon filter included to neutralise odours

PUMP PERFORMANCE CURVE

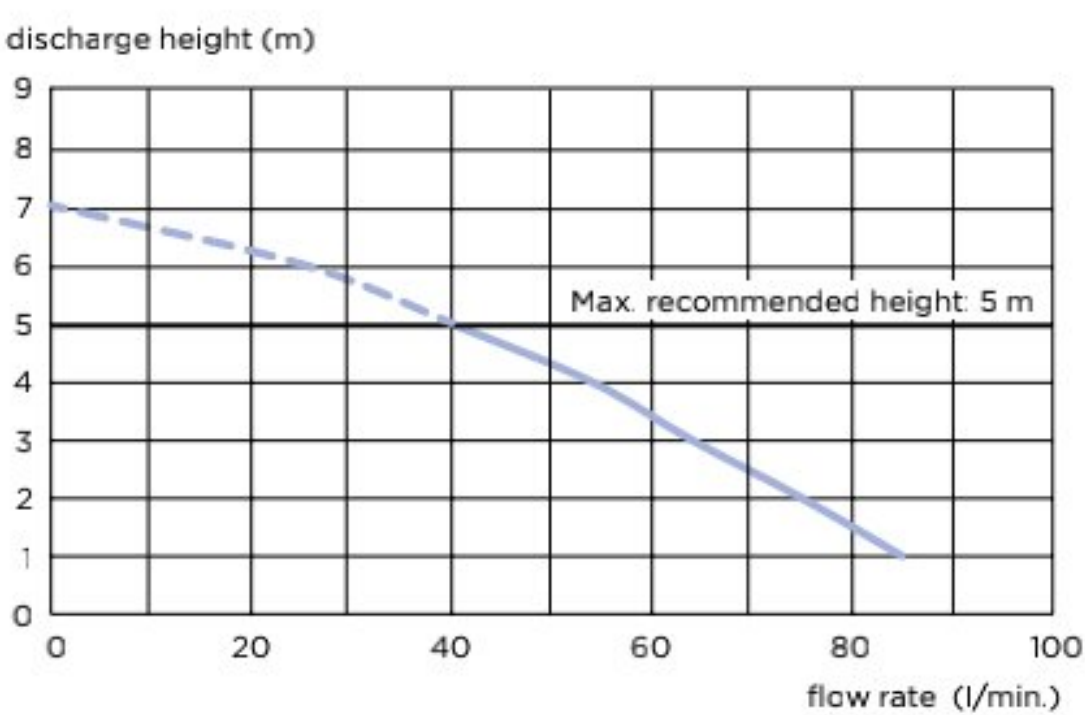

APPLICATIONS



Toilet



Washbasin



Bidet



Shower cubicle

PUMPING



WARRANTY



REFERENCE

EAN 3308811298010
SRSTD



Sanipro XR



Lets you install a complete shower room!

Easy installation:
Easy replacement of an old model.



Reliable and efficient macerating system.

Drains all the water from a shower room.

Quiet product.

TECHNICAL VIEW




TECHNICAL FEATURES

Number of available inlets	3
Ø of inlets	100/40 mm
Ø of recommended discharge pipe	22/28/32 mm
Power rating	400 W
Voltage	220-240 V/50 Hz
Electrical class	1
Protection rating (IP)	IP44
Shower tray height	13 cm

PACKING LIST

- Sanipro XR
- Check valve
- Connectors
- Activated carbon filter included to neutralise odours

PUMP PERFORMANCE CURVE

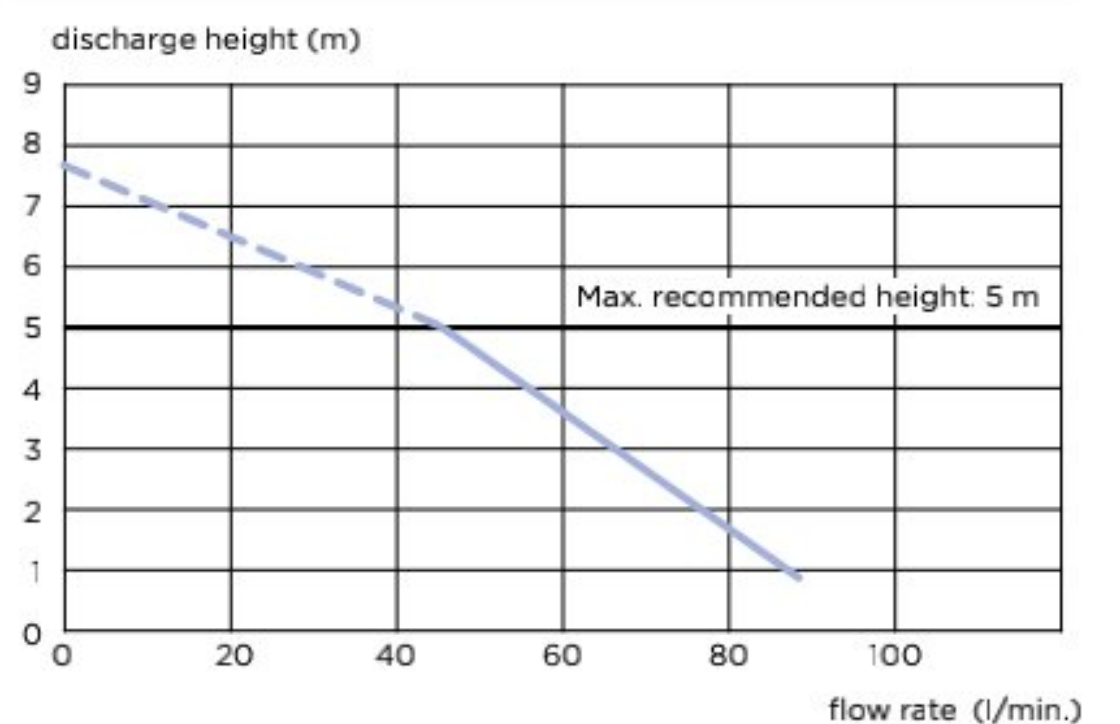

APPLICATIONS



PUMPING



WARRANTY



REFERENCE
EAN 3308811499011
SPSTD



Saniplus



Easy installation:
Easy replacement of an old model.



Large capacity, perfect for handling
large volumes of water.

Quiet product.



TECHNICAL VIEW




TECHNICAL FEATURES

Number of available inlets	4
Ø of inlets	100/40 mm
Ø of recommended discharge pipe	22/28/32 mm
Power rating	400 W
Voltage	220-240 V/50 Hz
Electrical class	1
Protection rating (IP)	IP44
Shower tray height	13 cm

PACKING LIST

- Saniplus
- Check valve
- Connectors
- Activated carbon filter included to neutralise odours

PUMP PERFORMANCE CURVE

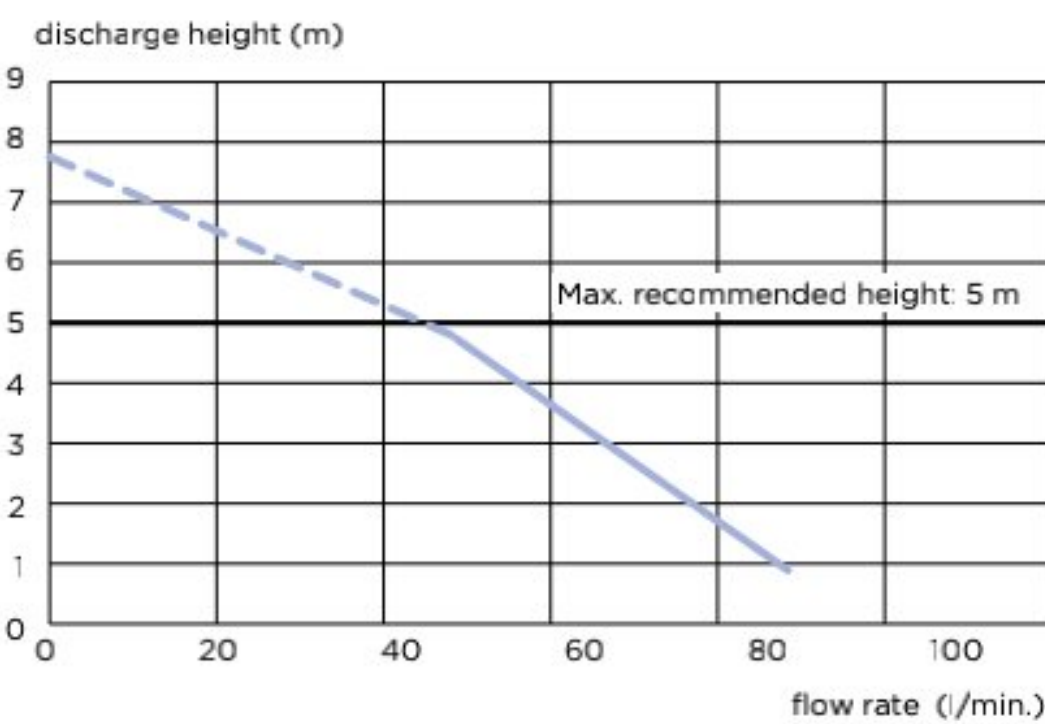

APPLICATIONS



Toilet



Washbasin



Bidet



Shower cubicle

PUMPING



WARRANTY



REFERENCE

EAN 3308815013039
B3PRO



Sanibest Pro



Perfect for communities.
Direct access to electronic components.



Suitable for intensive use
in public and commercial environments.



SFA RELIABILITY GUARANTEE

Macerator with the same grinding system as our floor standing or underground stations.

DIRECT ACCESS TO THE ELECTRONIC COMPONENTS



➔ Maceration with the Pro X K2 knife: designed to handle occasional disposal of toilet wipes, tampons, sanitary towels and condoms.


TECHNICAL FEATURES

Number of available inlets	4
Ø of inlets	100/40 mm
Ø of recommended discharge pipe	22/28/32 mm
Power rating	1100 W
Voltage	220-240 V/50 Hz
Electrical class	1
Protection rating (IP)	IP44
Shower tray height	15 cm

PACKING LIST

- Sanibest Pro
- Check valve
- Connectors
- Activated carbon filter included to neutralise odours

PUMP PERFORMANCE CURVE

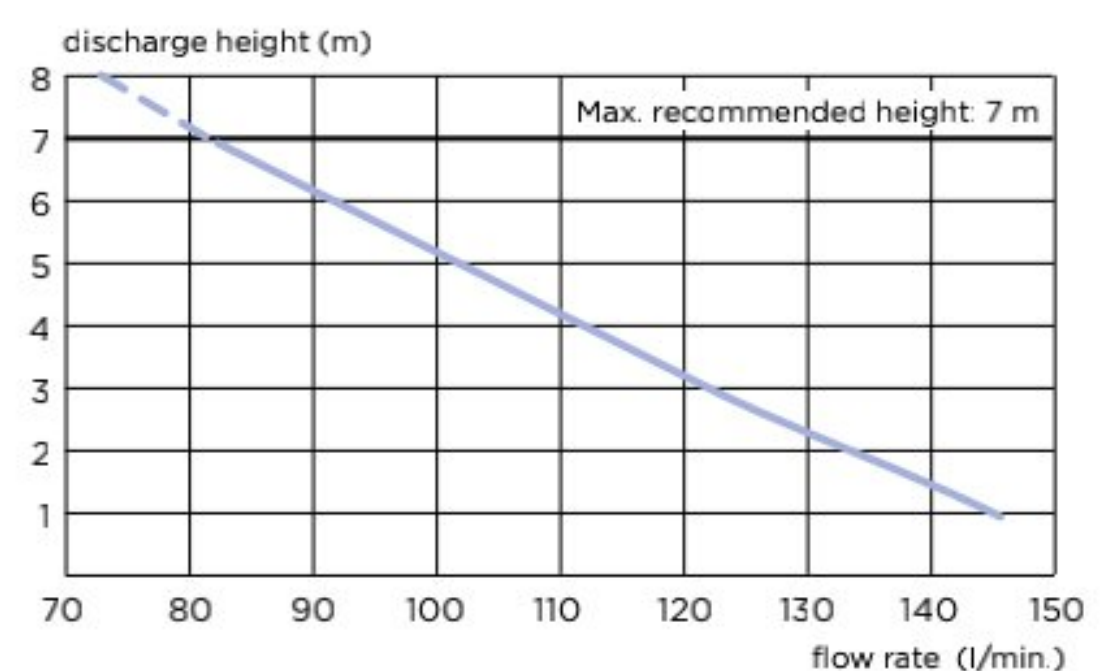

APPLICATIONS



PUMPING



WARRANTY



Reference
EAN 3308815066684
GRINDPROHK



Sanigrind Pro



Ideal for public usage.
The possibility to lower the pump.



The unique solution for S-trap toilets.
High performance macerating.



DIRECT ACCESS TO THE ELECTRONIC COMPONENTS

TECHNICAL FEATURES




Number of available inlets	3
Ø of inlets	100/40 mm
Ø of recommended discharge pipe	22/28/32 mm
Power rating	1100 W
Voltage	220-240 V/50 Hz
Electrical class	1
Protection rating (IP)	IP44

SFA RELIABILITY GUARANTEE

Macerator with the same grinding system as our floor standing or underground stations.

PUMP PERFORMANCE CURVE

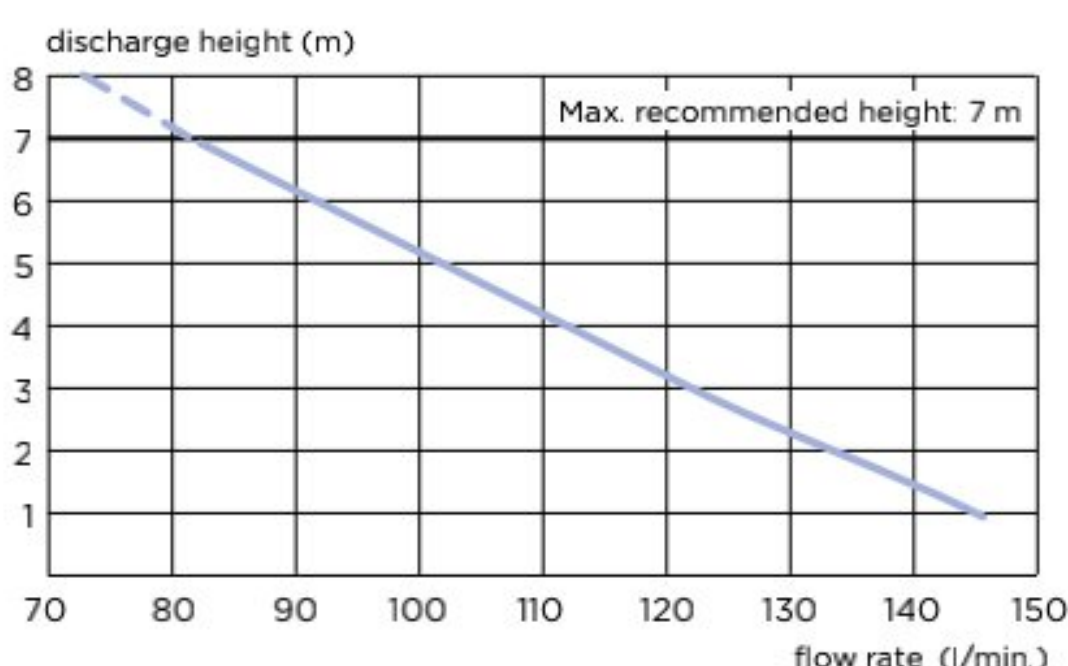

➔ Maceration with the Pro X K2 knife: designed to handle occasional disposal of toilet wipes, tampons, sanitary towels and condoms.

PACKING LIST

- Sanigrind Pro
- Check valve
- Connectors
- Activated carbon filter included to neutralise odours



APPLICATIONS



Wall-hung toilet Washbasin



Bidet Shower cubicle

PUMPING



WARRANTY



REFERENCE
Glass-clad version
EAN 3308815074115
WALLPROUPSTD



Saniwall Pro UP with glass casing

Saniwall Pro ^{UP}

GLASS-CLAD VERSION

TILED VERSION



The solution (macerator + support frame + glass casing) for installing a wall-hung bowl.

The solution (macerator + frame-support) to install a wall-hung bowl, tiled version.

Easy maintenance with dual access to the product.

Magnetic tabs provided to create a removable hatch.

Easy maintenance with dual access to the product.



The solution (macerator + GROHE support frame + glass casing) in an elegant and contemporary design.

The solution to install a wall-hung bowl which fits perfectly into a tiled room.

Low noise level: 47 dB(A).

Low noise level: 47 dB(A).

PACKING LIST

SFA macerator	SFA macerator
GROHE support frame	GROHE support frame
Glass-clad	Magnetic tabs for tiled version
Check valve	Check valve
Connectors	Connectors

GLASS-CLAD

REMOVABLE HATCH

Premium design

Cut-out template

Removable upper section for easy maintenance:
- Without disassembling the bowl
- Without disconnecting the macerator

Magnetic tabs provided to create a removable hatch for tiling





REFERENCE
Tiled version
 EAN 3308815076096
 WALLPROUPSTDAC


**AVAILABLE AS A
 TILED VERSION**
 Supplied with magnetic
 tabs to install a
 removable hatch.




TECHNICAL FEATURES

Number of available inlets	3
Ø of inlets	100/40 mm
Ø of recommended discharge pipe	22/28/32 mm
Power rating	400 W
Voltage	220-240 V
Electrical class	1
Shower tray height	13 cm
Protection rating (IP)	IP44
Noise level	47 dB(A)

PUMP PERFORMANCE CURVE

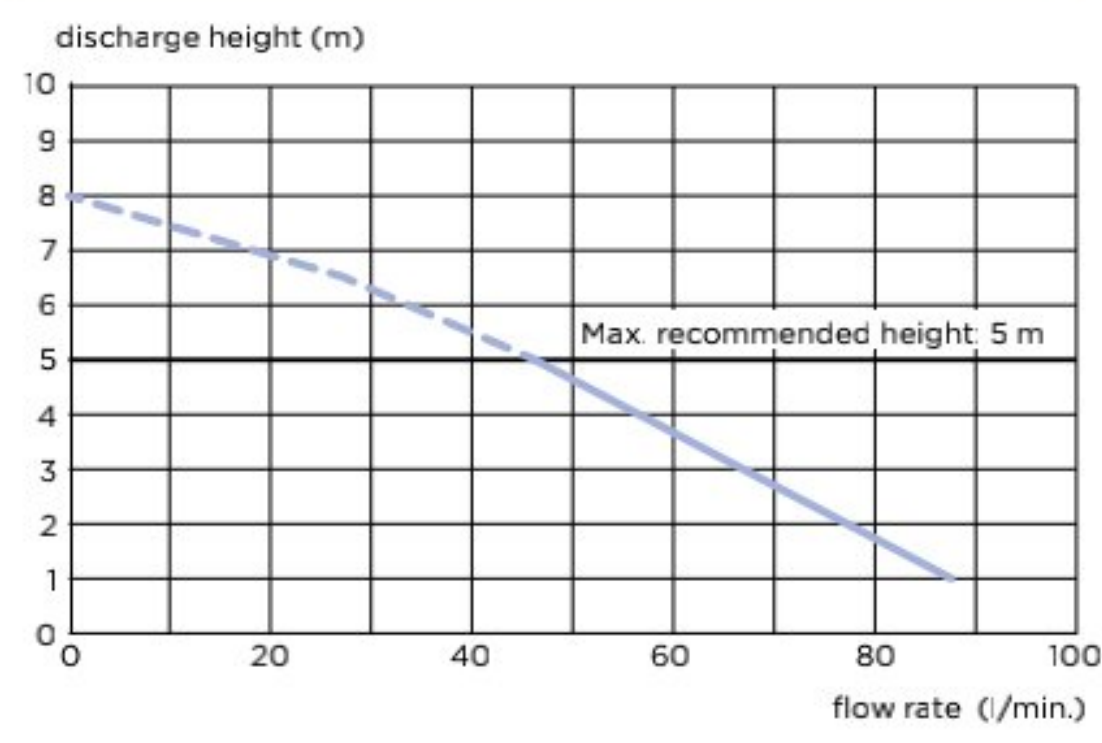

DUAL ACCESS TO THE PRODUCT

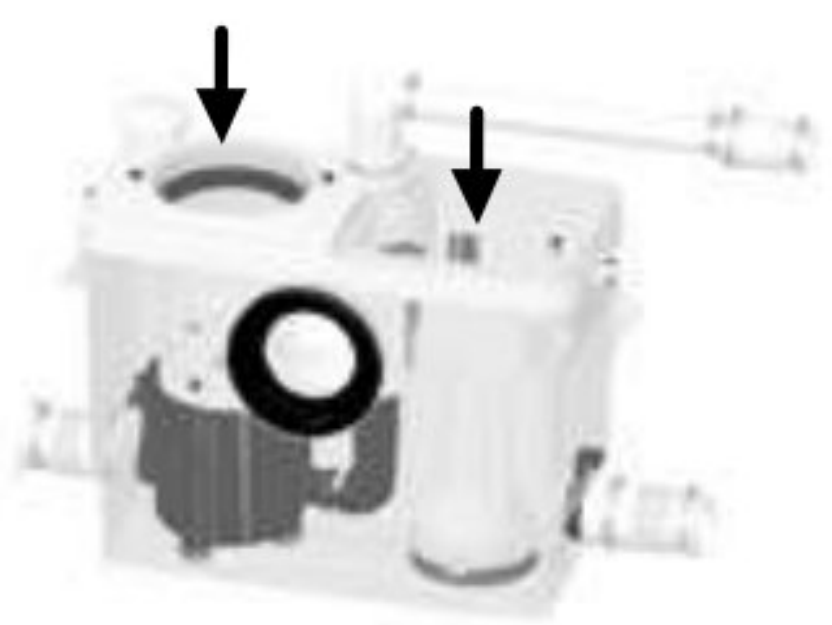

- ➔ Direct access to the basket in case of blockage following incorrect use of the appliance
- ➔ Direct access to the electrics through the hood

SUPPORT FRAME GROHE

- Reduced width: 500 mm
- Tank: equipped with a 3 L/6 L dual flush
- Quiet and easy to maintain flush system
- Chrome control plate



APPLICATIONS



Wall-hung toilet



Washbasin



Bidet



Shower cubicle

PUMPING

5 m



WARRANTY



REFERENCE

EAN 3308811209016
PA2STD



Sanipack



The macerator for wall-hung bowls that fits in partitions.

Ideally suited for fitted bathrooms.



Compact design, suitable for discreet installation behind a partition.

Extra slim dimensions.




TECHNICAL VIEW



TECHNICAL FEATURES

Number of available inlets	3
Ø of inlets	100/40 mm
Ø of recommended discharge pipe	22/28/32 mm
Power rating	400 W
Voltage	220-240 V/50 Hz
Electrical class	1
Protection rating (IP)	IP44
Shower tray height	13 cm
Maximum distance from the toilet	50 cm

PUMP PERFORMANCE CURVE

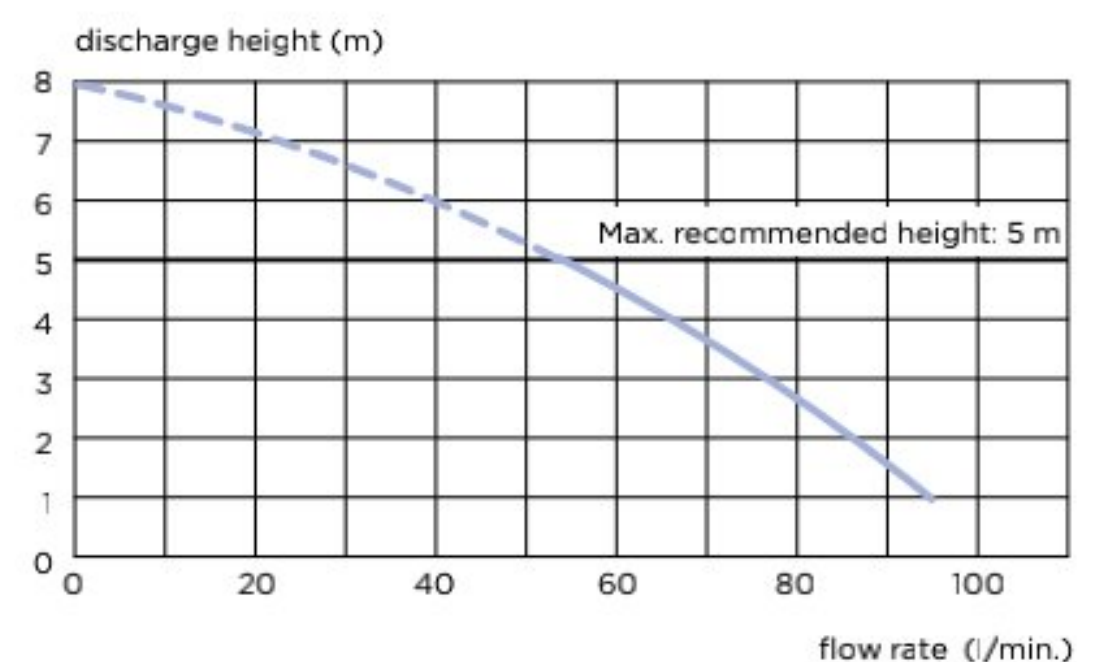

PACKING LIST

- Sanipack
- Check valve
- Connectors
- Activated carbon filter included to neutralise odours



APPLICATIONS

Saniaccess 1



Toilet

Saniaccess 2



Toilet



Washbasin

Saniaccess 3



Toilet



Washbasin



Bidet



Shower cubicle

PUMPING



WARRANTY



REFERENCES

Saniaccess 1
EAN 3308815013169
SANIACCESS1

Saniaccess 2
EAN 3308815013176
SANIACCESS2

Saniaccess 3
EAN 3308815013183
SANIACCESS3



Saniaccess 1-2-3



Easy maintenance with dual access to the product.

Flow rate: 80 L/min.



Easy maintenance with dual access to the product: ideal for rentals.

Low noise level: 46 dB(A).



DUAL ACCESS TO THE PRODUCT



- ➔ Direct access to the basket in case of blockage following incorrect use of the appliance
- ➔ Direct access to the electrics to replace any worn out components


PACKING LIST

- Saniaccess
- Check valve
- Connectors
- Activated carbon filter included to neutralise odours

TECHNICAL FEATURES

Number of available inlets	1 (Saniaccess 1) 2 (Saniaccess 2) 4 (Saniaccess 3)
Ø of inlets	100/40 mm
Ø of recommended discharge pipe	22/28/32 mm
Power rating	400 W
Voltage	220-240 V/50 Hz
Electrical class	1
Protection rating (IP)	IP44
Shower tray height	15 cm
Noise level	46 dB(A)

PUMP PERFORMANCE CURVE

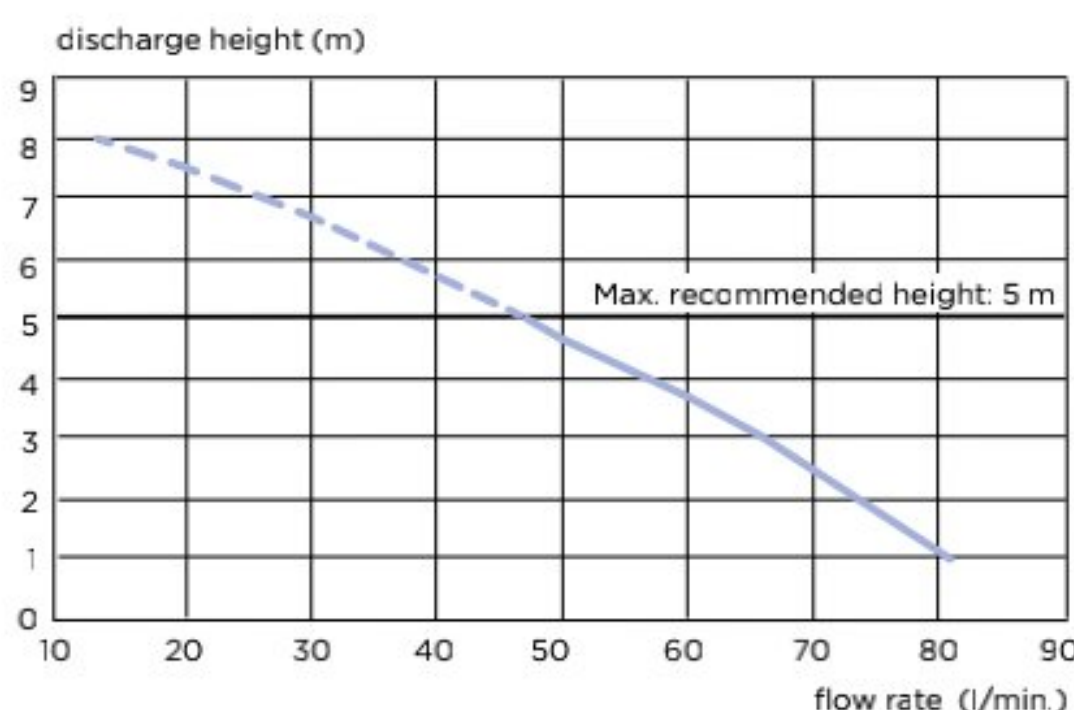

Descaler

To increase the lifespan of your appliance, you are advised to descale and clean the macerator and the bowl on a regular basis.

The special **Saniflo** cleaning descaler is perfectly designed to descale right inside your appliance and clean it while caring for its internal components.

The descaler has 4 specific characteristics

- Specially designed to care for the rubber of the components
- A formula perfectly suited to small diameter drainage pipes
- Product suitable for septic tanks
- Laboratory-tested formula and dosage



Reference
EAN 3308819899011
DET


HOW IS THE DESCALER USED?




1
Disconnect the power supply from the macerator.



2
Put a dose of descaler in the bowl.

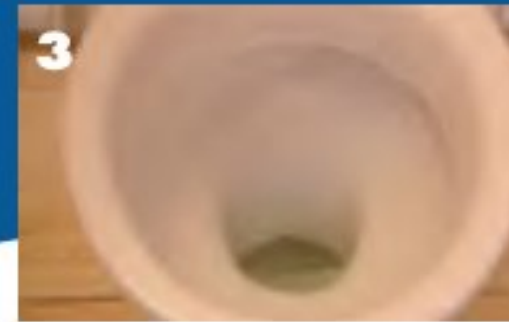

3
Leave on for at least 2 hours.

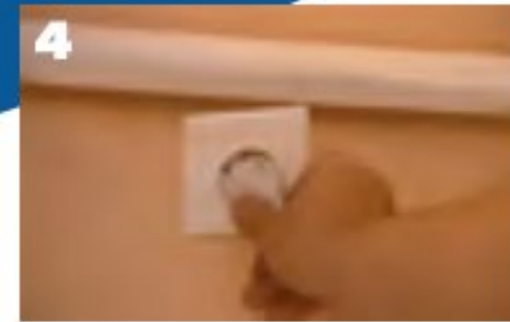

4
Reconnect the power supply to the macerator.



5
Rinse away by flushing twice.

Sanialarm

An original concept

Occasional power outages, scaling of poorly maintained old appliances or even problems with clogged pipes, are all factors in significant variation of the water level permanently contained in an SFA macerator or pump.

To tackle this kind of unpredictability, SFA offers an efficient solution that provides instant alerts to avoid inappropriate use and take immediate action.

How does it work?

The Sanialarm attaches to the cover of the SFA device. It consists of a level pressure switch which automatically activates the warning buzzer when the water volume exceeds the maximum permitted level. The alarm then produces an intermittent sound until it is silenced and the problem resolved.

Easily install the Sanialarm



1
Insert 2 standard 1.5V batteries (not supplied) into the unit.



2
Drill a 10 mm diameter hole in the location shown on the appliance hood.



3
Coat with silicone grease before inserting the pressure switch tube of the Sanialarm.



4
Attach the Sanialarm inside the opening of the tube.



5
Switch to the ON position.

**BEFORE HANDLING:
DISCONNECT
THE POWER SUPPLY
FROM THE MACERATOR.**


Reference
EAN 3308810042799
ALARM




Works with all models in the SFA adaptable macerators range (previous and current), as well as the Sanispeed+. The Sanialarm works with 2 1.5V batteries (not supplied)

Saniflo


Sanitop

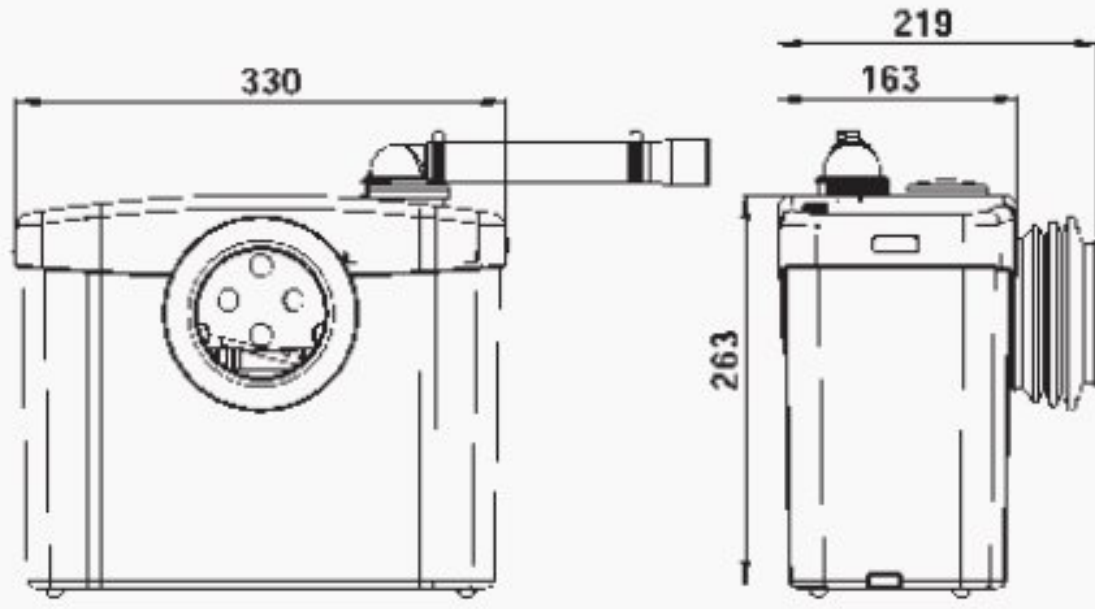


Saniplus

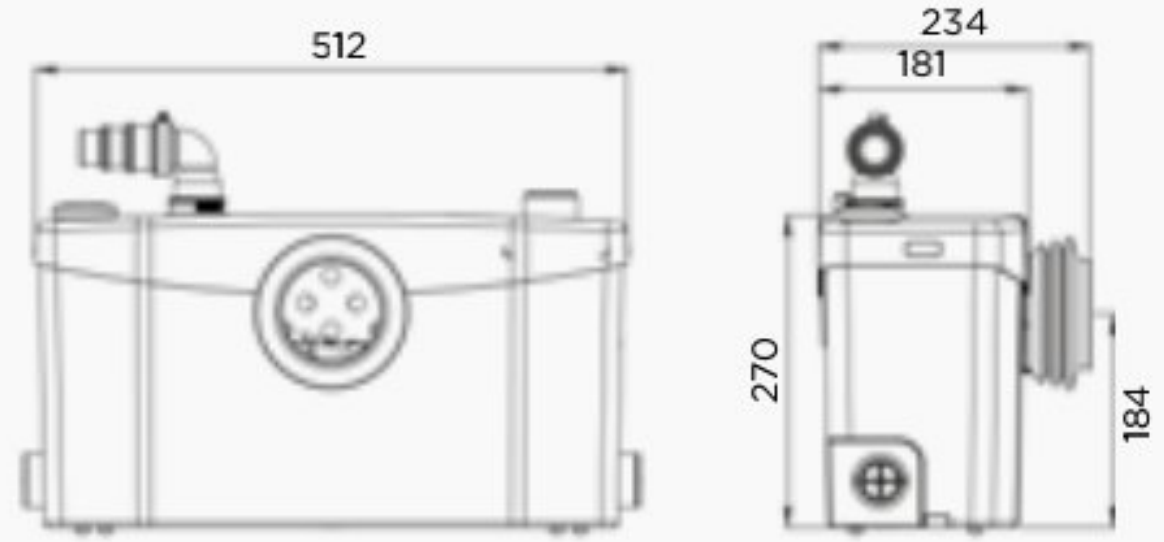


Sanipro XR

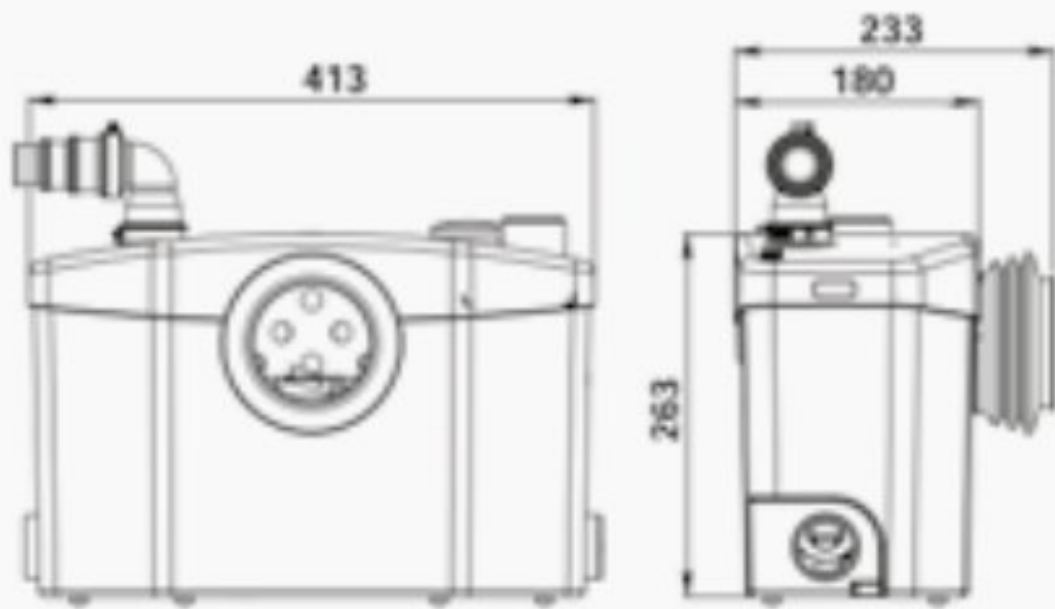


Sanipack

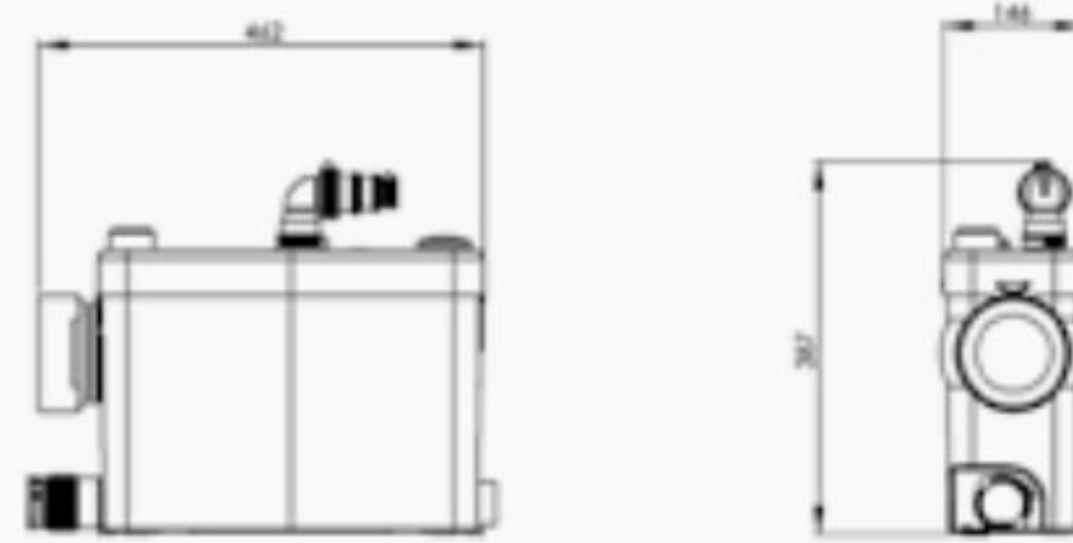


Sanibest Pro

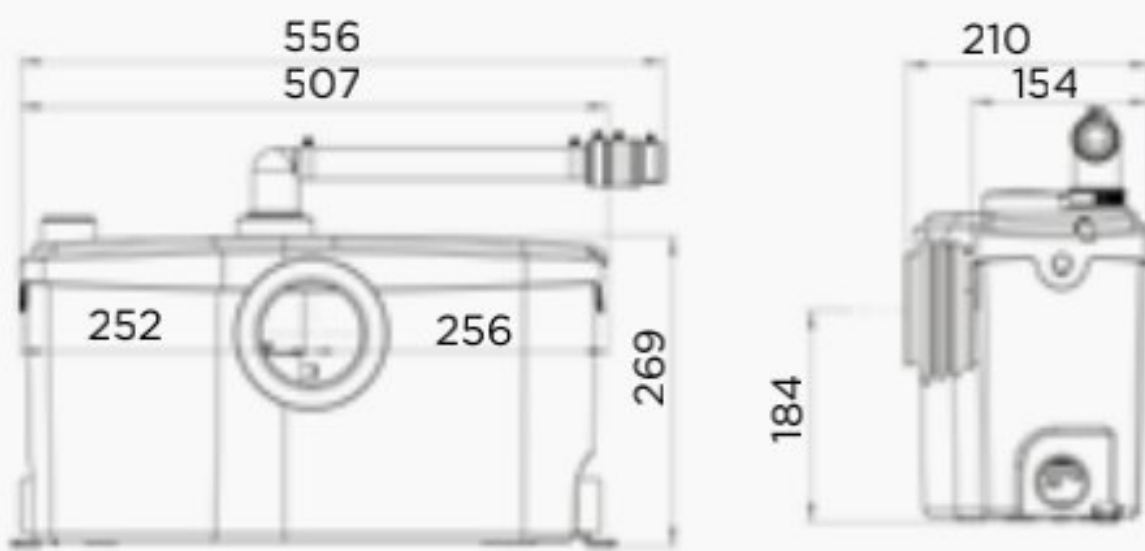


Sanigrind Pro

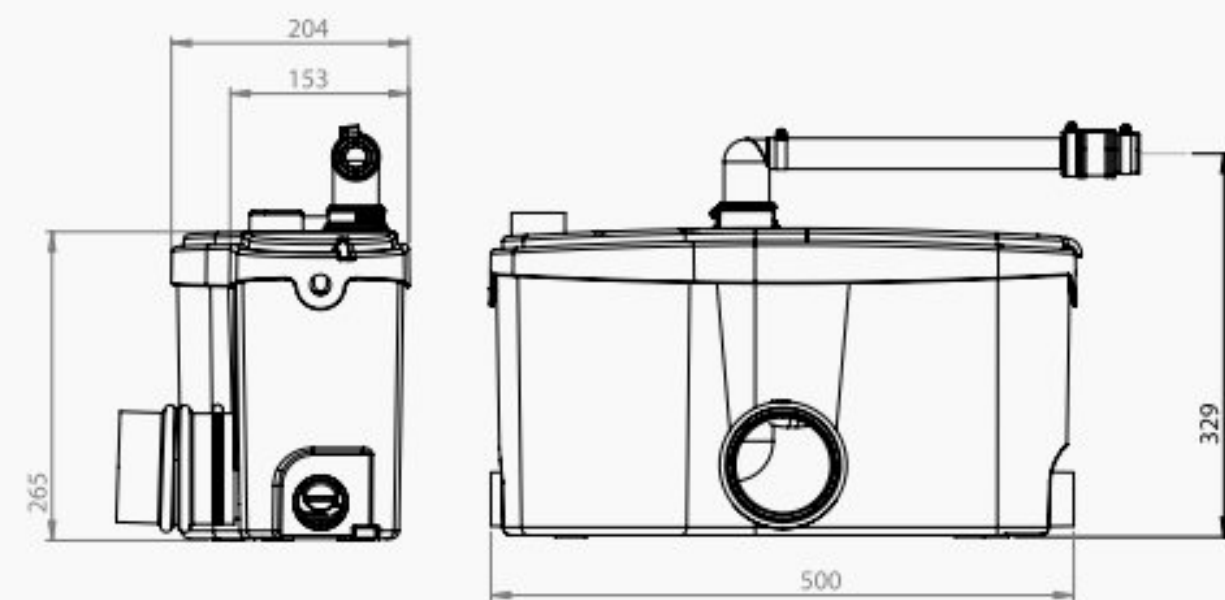

Saniwall Pro^{UP}

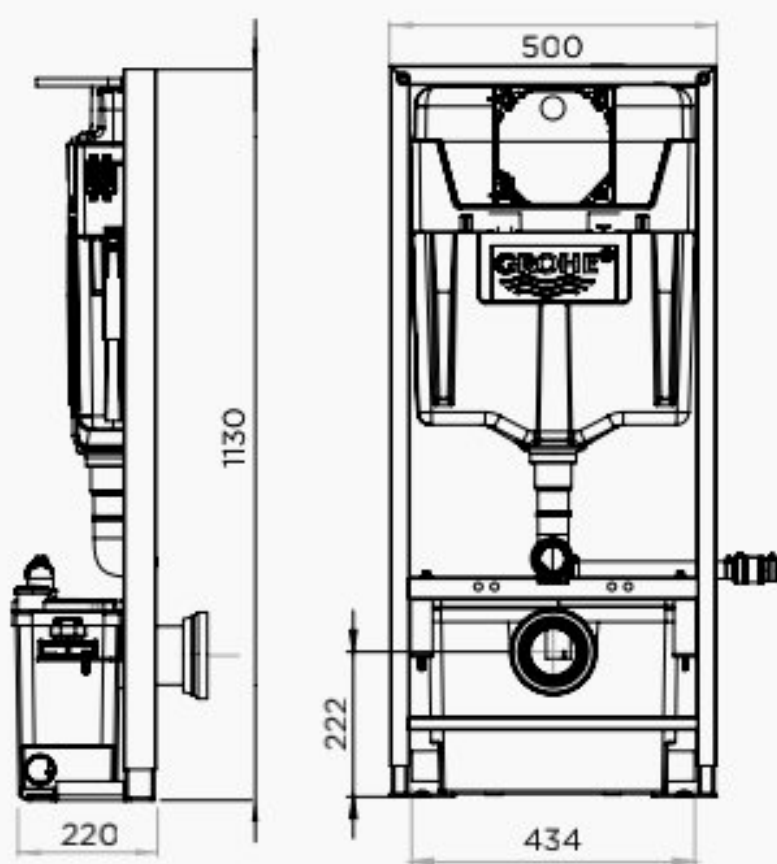


Saniaccess 1-2

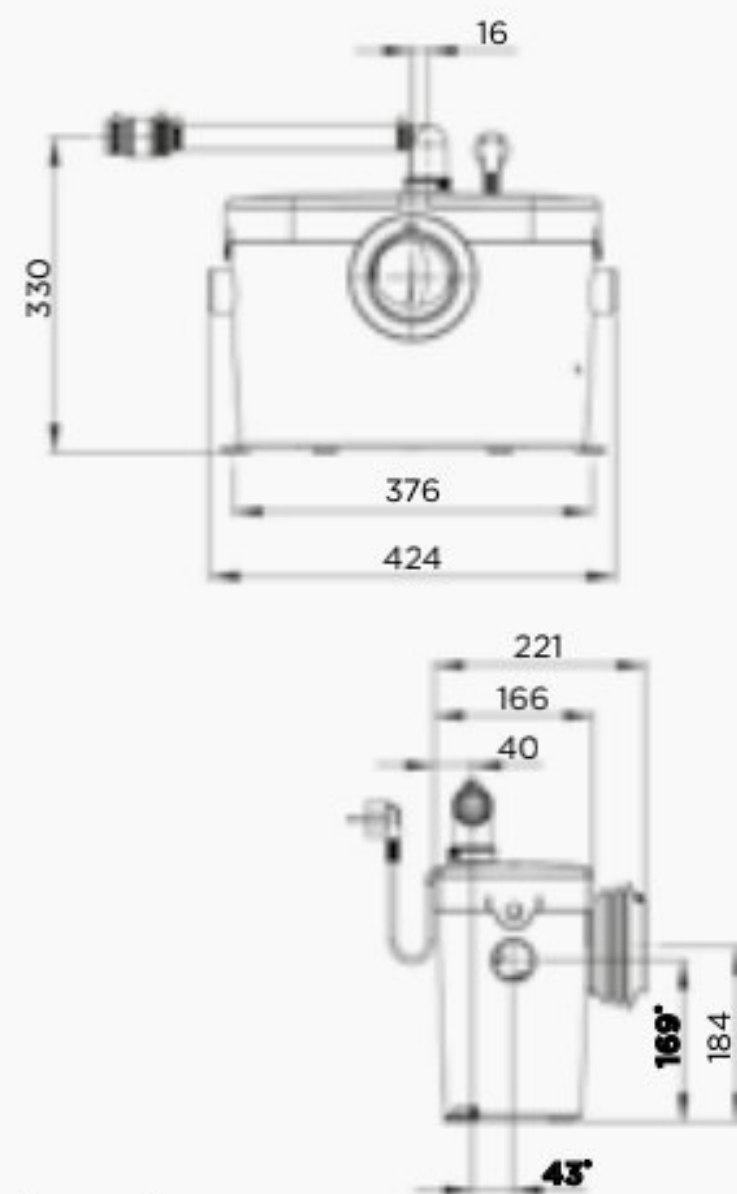

*Saniaccess 2

Saniaccess 3

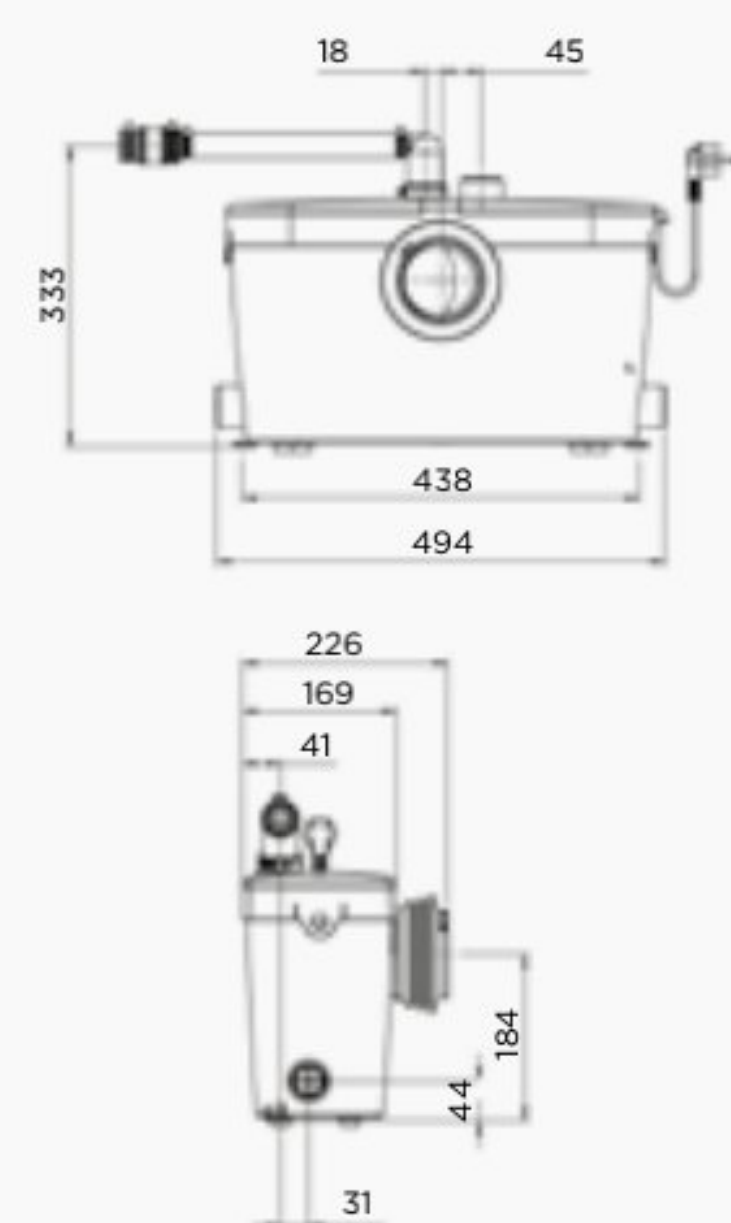

WHY SANICOMPACT?

Comfortable and reliable with a contemporary design, the products in the Sanicompact range are the solution for installing sanitary fixtures in small spaces.

In order to meet expectations in terms of space planning, SFA has expanded its range of macerators. When the space available for fitting out new sanitary fixtures is reduced, the Sanicompact range is an aesthetic and efficient answer.

Equipped with an integrated macerator, these ceramic bowls* are space-saving. Floor-mounted or wall-hung, these solutions are ideal for fitting out a studio, closet or space under the stairs. They also provide an option to connect a washbasin in addition to the toilet.

BEFORE





















AFTER

*Excluding Sanismart



Sanicompact

		 Toilet	 Wall-hung toilet	 Wash basin	 Dual-flush system	
	Sanicompact 43 The most compact in the range	 •		Optional	✓	
	Sanicompact Pro Compact and contemporary design	 •		Optional	✓	
	Saniflush Entirely ceramic complete toilet with efficient maceration system	 •		•		
	Sanismart Lightness and hygiene combined in one unit	 •			✓	
	Sanicompact Comfort Wall-hung bowl with clean lines and height-adjustable installation frame	 •	•	•	✓	
	Sanicompact Comfort + Frame + wall-hung bowl solution with optional housing		•	•	✓	
	Sanicompact Comfort + / Bracket Complete solution: self-supporting frame + wall-hung bowl + 3 housing colour options		•	•	✓	

- PRODUCTS WITH A CONTEMPORARY DESIGN AND EQUIPPED WITH SILENCE TECHNOLOGY
- AN ENVIRONMENTALLY-FRIENDLY RANGE: WATER AND ENERGY EFFICIENT THANKS TO THE DUAL FLUSH SYSTEM
- COMFORT OF USE WITH THE SOFT-CLOSE TOILET SEAT AND LID
- GUARANTEED HYGIENE THANKS TO THE ANTI-LIMESCALE CERAMIC AND AN ANTIBACTERIAL LID

ECO+ DUAL-FLUSH SYSTEM

FOR OVER 60 YEARS, SFA HAS BEEN CONSTANTLY REINVENTING ITSELF AND INNOVATING.

Since 2009, the company has been involved in environmental protection by extending the ECO+ system to its entire Sanicompact range.

This system provides a dual flush using only 1.8 or 3 liter of water.

With this system, SFA establishes its Sanicompact range as the most water efficient on the market. This represents water savings of over 13,000 L (13 m³) compared to a conventional toilet fitted with a 3 L/6 L flush (over one year for a family of 4 people).

A Sanicompact saves more than 5,200 L compared to any other equivalent macerators on the market.

HOW TO INSTALL A SANICOMPACT?

To install the Sanicompact you must have: a water inlet + a water outlet + a power socket.

Connect your Sanicompact to the cold water supply pipe.



1



2



3



4

Connect the Sanicompact drainage elbow to your PVC pipe and connect it to your main drain.

Connect the Sanicompact to your 230V socket: and it works!

HOW DOES IT WORK?

Pressing the flush button starts a new program, firstly activating the bowl rinse.

The motor starts up: water and matter are sucked out.



1



2



3



4

Finely ground matter is expelled. A check valve prevents the return of wastewater.

The macerator is ready for use again.

APPLICATIONS



PUMPING



WARRANTY



REFERENCES

Standard C43STD:
EAN 3308814399011
C43STD

With C43LV washbasin:
EAN 3308815013268
C43LV



Sanicompact 43



Ultra compact size: 43 cm deep.
Small diameter discharge pipe: 32 mm.
Flow rate > 100 L/min.



The most compact in the range.
Can be connected to a washbasin.
Silence technology: 51 dB(A).




SEMI-TRANSPARENT VIEW



TECHNICAL FEATURES

Number of available inlets	1
Ø of inlets	40 mm
Ø of recommended discharge pipe	32 mm
Flow rate	105 L/min at 1 m
Power rating	550 W
Voltage	220-240 V/50 Hz
Electrical class	1
Noise level	51 dB(A)

PUMP PERFORMANCE CURVE

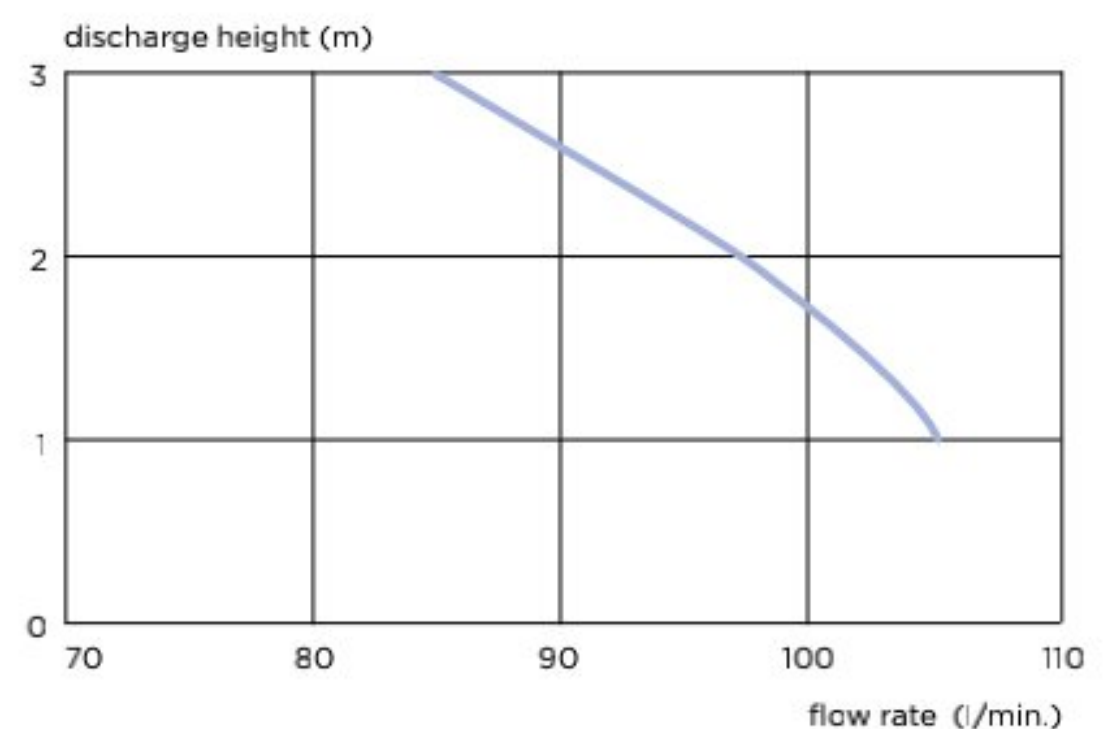

PACKING LIST

- Sanicompact 43
- Check valve
- Floor fixings provided
- Clip-on soft-closing toilet lid



APPLICATIONS



PUMPING



WARRANTY



REFERENCES

Standard C11STD:
EAN 3308813099011
C11STD

With C11LV washbasin:
EAN 3308815065960
C11LV

Sanicompact Pro



Can be installed instead of a bidet.
Small diameter discharge pipe: 32 mm.
Flow rate > 100 L/min.



Contemporary design.
Can be connected to a washbasin.
Silence technology: 51 dB(A).



SEMI-TRANSPARENT VIEW




TECHNICAL FEATURES

Number of available inlets	1
Ø of inlets	40 mm
Ø of recommended discharge pipe	32 mm
Flow rate	105 L/min at 1 m
Power rating	550 W
Voltage	220-240 V/50 Hz
Electrical class	1
Noise level	51 dB(A)

PACKING LIST

- Sanicompact Pro
- Check valve
- Floor fixings provided
- Soft closing toilet seat supplied

PUMP PERFORMANCE CURVE

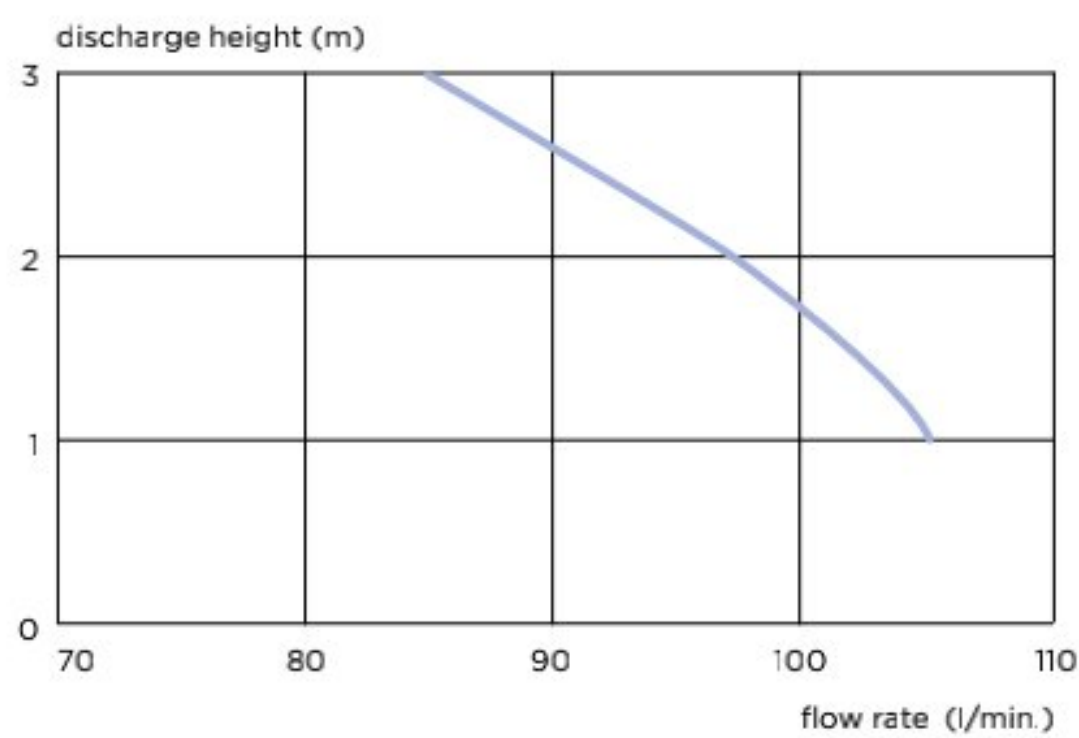

APPLICATIONS



PUMPING



WARRANTY



REFERENCE
With washbasin
EAN 3308815082417
SANIFLUSH



Saniflush



Easy access to the macerator by sliding the ceramic.

Complete toilet with efficient maceration system.
Classic toilet design with conventional bowl base.



Classic design, double spiral flush system with 3-6 L tank.

Easy to clean: ceramic with flangeless system.

Can be connected to a washbasin.

Silence technology: 46 dB(A).



Flangeless system

SEMI-TRANSPARENT VIEW




PACKING LIST

- Ceramic Saniflush with 3-6 litre tank
- Check valve
- Floor fixings provided
- Soft closing toilet seat supplied

TECHNICAL FEATURES

Number of available inlets	1 (right or left)
Ø of inlets	40 mm
Ø of recommended discharge pipe	32 mm
Maximum flow rate	90 L/min
Power rating	400 W
Voltage	220-240 V/50 Hz
Electrical class	1
Noise level	46 dB(A)

PUMP PERFORMANCE CURVE

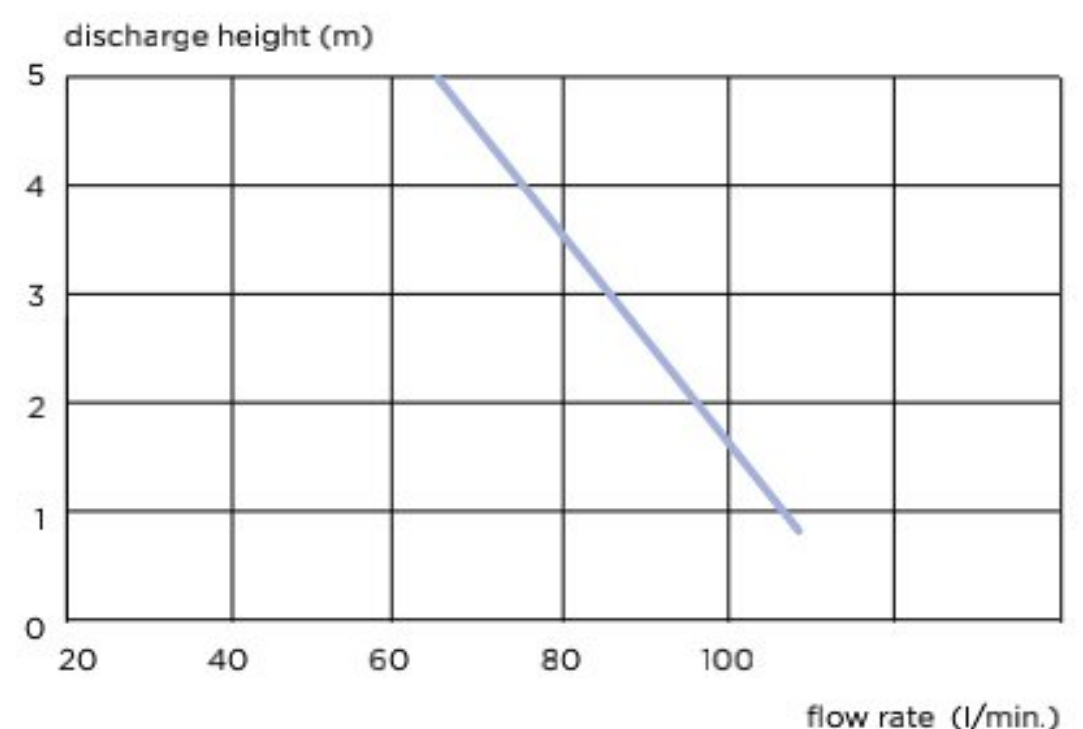

PUMPING



WARRANTY



REFERENCE
Standard
EAN 3308815081403
SANISMART

NEW

Sanismart



17.5 kg for easy handling.
Small diameter discharge pipe: 32 mm.
Efficient spiral flush system.



Optimal comfort thanks to a wide seat.
Easy to clean: flangeless system and hygienic Sugopica material (synthetic material made from organic glass: antibacterial and anti-limescale).




SEMI-TRANSPARENT VIEW



TECHNICAL FEATURES

Number of available inlets	-
Ø of recommended discharge pipe	32 mm
Flow rate	105 L/min
Power rating	550 W
Voltage	230 V/50 Hz
Electrical class	1
Noise level	51 dB(A)

PUMP PERFORMANCE CURVE

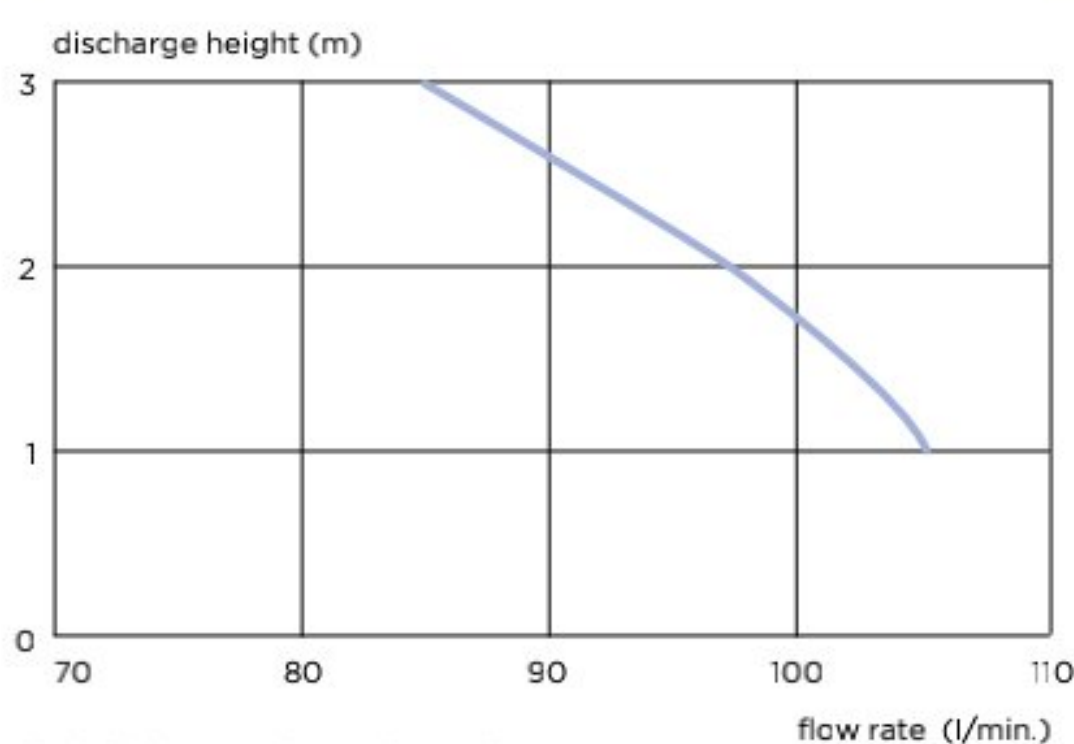

PACKING LIST

- Sanismart
- Check valve
- Soft-closing toilet lid
- Floor fixings provided



Flangeless system

APPLICATIONS



Washbasin

PUMPING



WARRANTY



REFERENCES

Sanicompact Comfort:
EAN 3308815012223
C72LV
Sanicompact Comfort+:
EAN 3308815083247
C72LVCPLUS



Sanicompact Comfort, Comfort+

Sanicompact Comfort+ Bracket

COMFORT+ VERSION



Bowl solution with maceration + support frame.

Universal self-supporting frame. (Comfort +)



Soft-closing toilet lid.

Can be connected to a washbasin.

Mounting possible on all wall types. (Comfort +)

Silence technology: 51 dB(A).

COMFORT+ BRACKET VERSION



Complete solution: bowl with macerator + support frame + heat-bonded housing.

Universal self-supporting frame. (Comfort +)



No work: quick installation.

Can be connected to a washbasin.

3 housing colour options:
White, Grey and Anthracite.

Silence technology: 51 dB(A).



Sanicompact Comfort+



Sanicompact Comfort



PACKING LIST

Sanicompact Comfort, Comfort+

Universal self-supporting frame (Sanicompact Comfort +)

Short frame with adjustable feet (Sanicompact Comfort)

Wall-hung bowl

Check valve

Soft closing toilet seat supplied

Sanicompact Comfort+ Bracket

Universal self-supporting frame


Wall-hung bowl

Housing

Check valve

Soft closing toilet seat supplied

PUMP PERFORMANCE CURVE

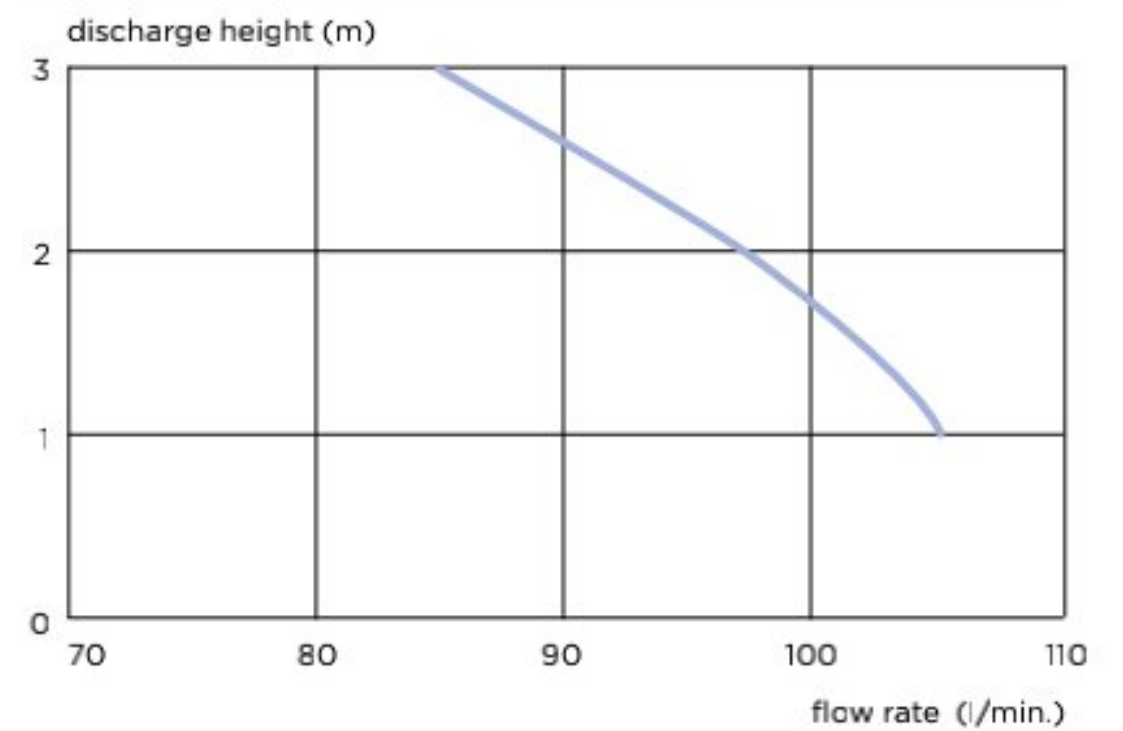

APPLICATIONS



Washbasin

PUMPING



WARRANTY



Sanicompact Comfort+ Bracket Anthracite
 EAN 3308815083254
 C72LVCPLUSAC

Sanicompact Comfort+ Bracket Grey
 EAN 3308815083261
 C72LVCPLUSAG

Sanicompact Comfort+ Bracket White:
 EAN 3308815083278
 C72LVCPLUSAW

AVAILABLE COLOURS



White



Grey



Anthracite

SEMI-TRANSPARENT VIEW



Sanicompact Comfort

Sanicompact Comfort+

TECHNICAL FEATURES

Number of available inlets	1
Ø of inlets	40 mm
Ø of recommended discharge pipe	32 mm
Flow rate	105 L/min
Power rating	550 W
Voltage	220-240 V/50 Hz
Electrical class	1
Noise level	51 dB(A)

COMFORT+




COMFORT+ BRACKET




Sanicompact 43




Sanicompact Pro

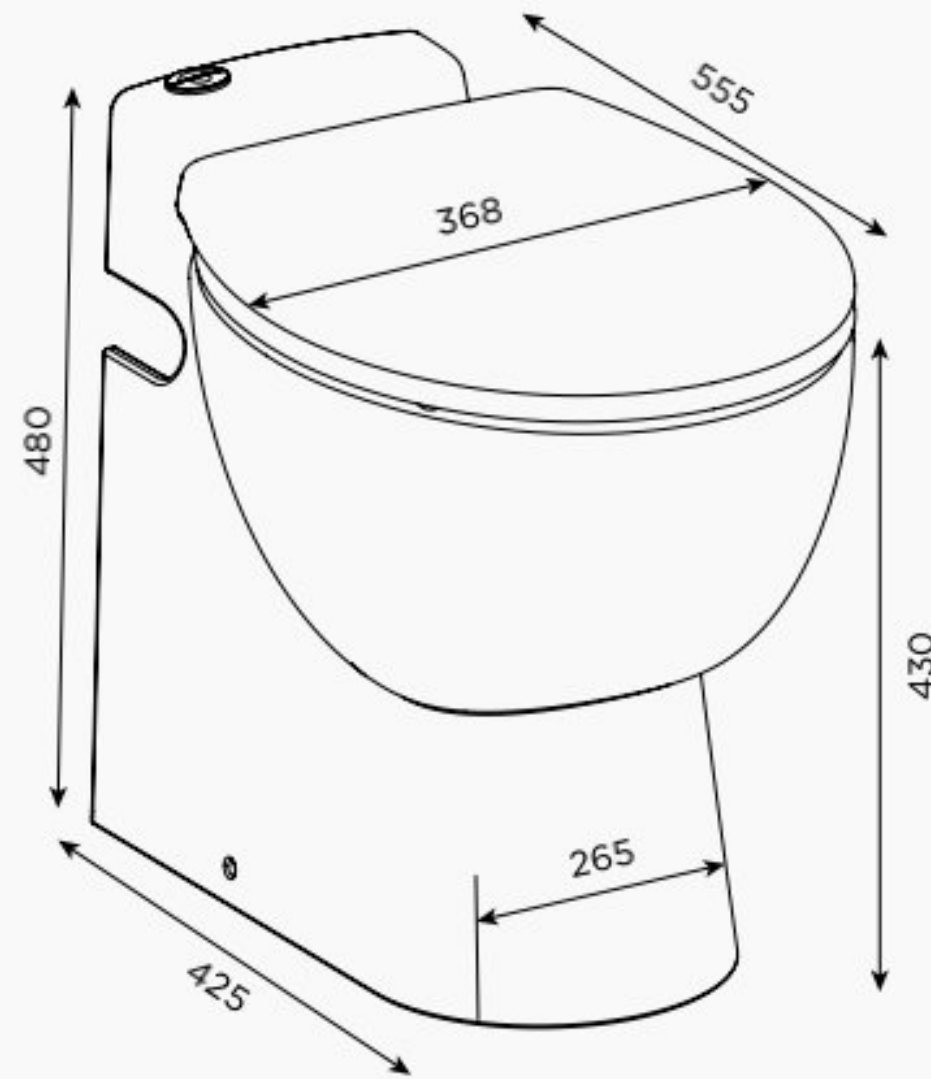


Saniflush

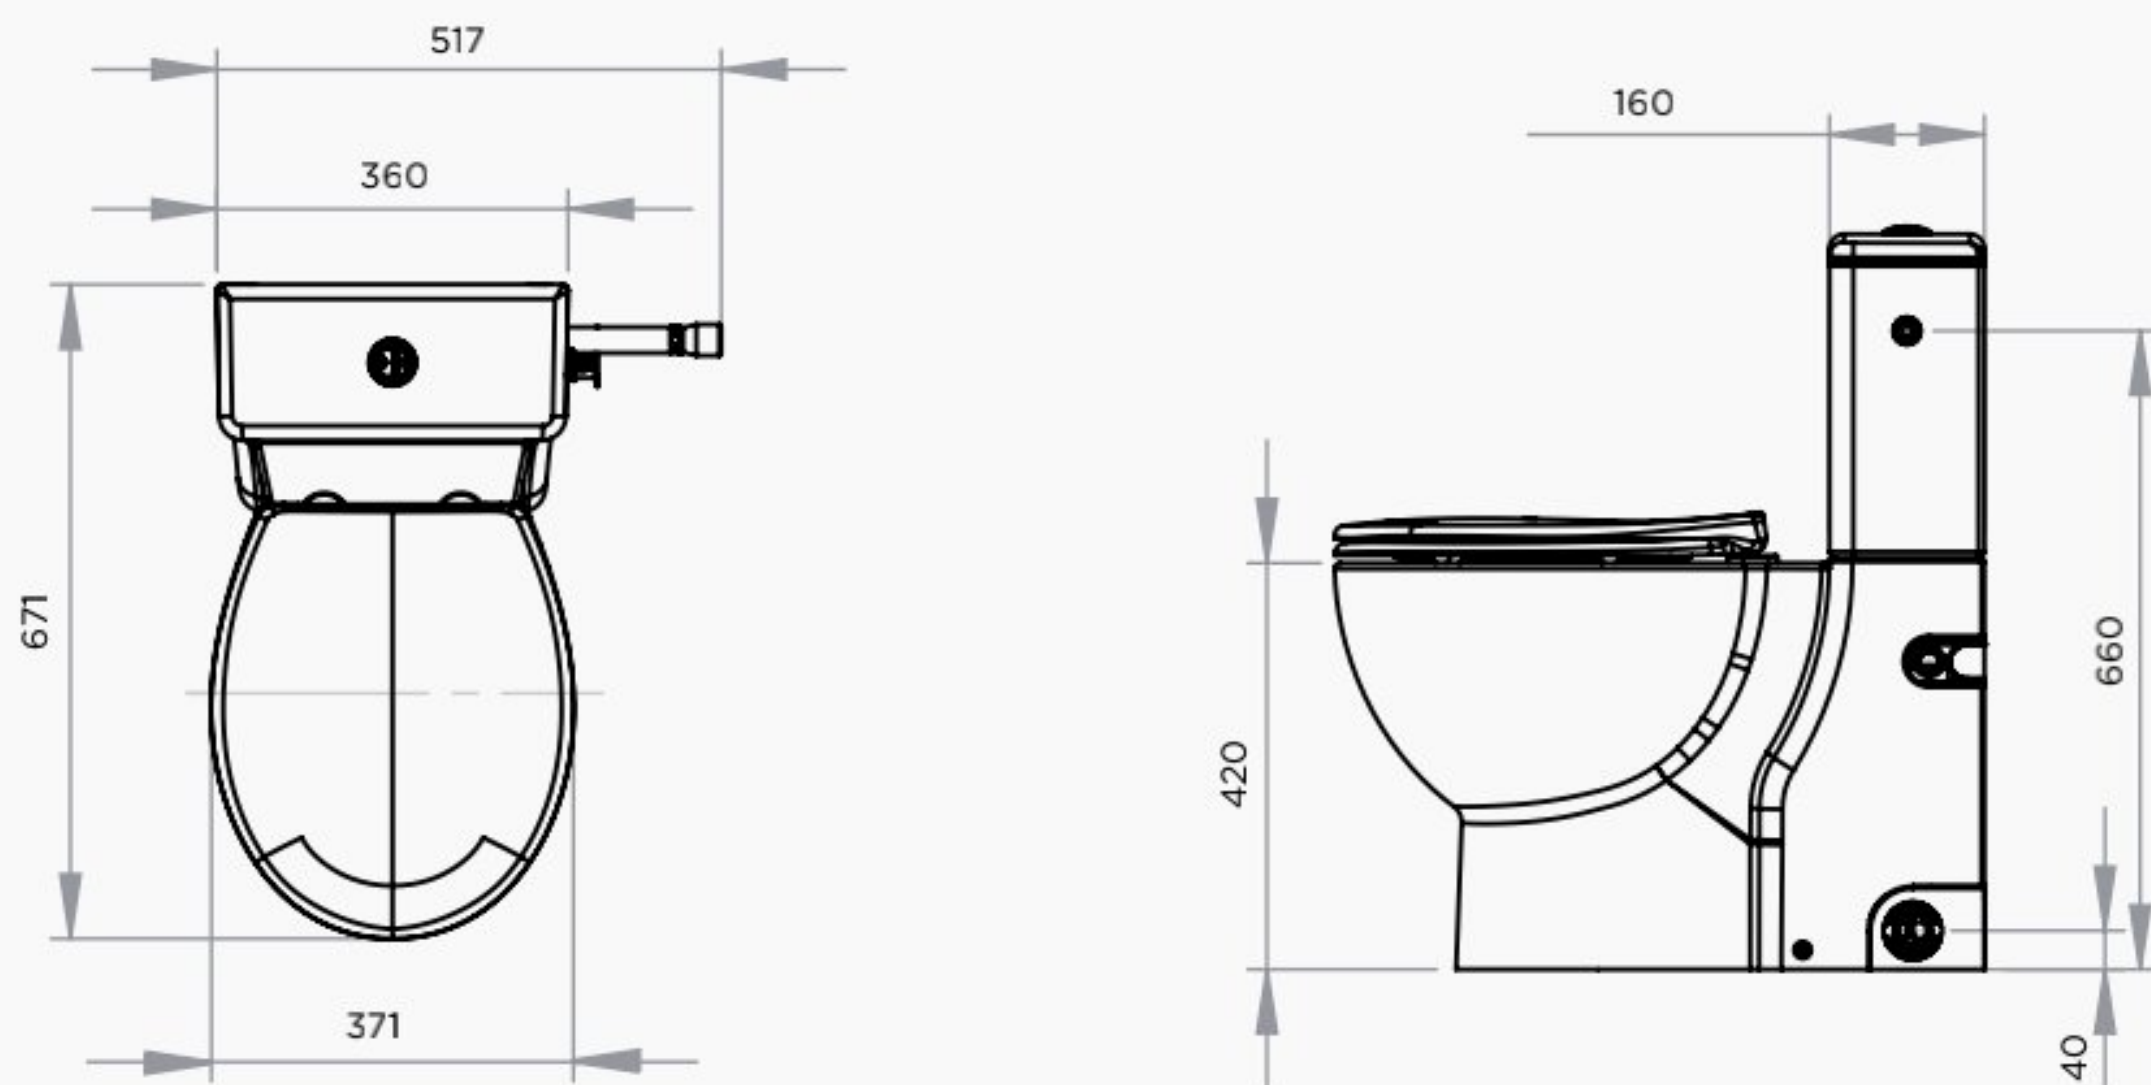


Sanismart

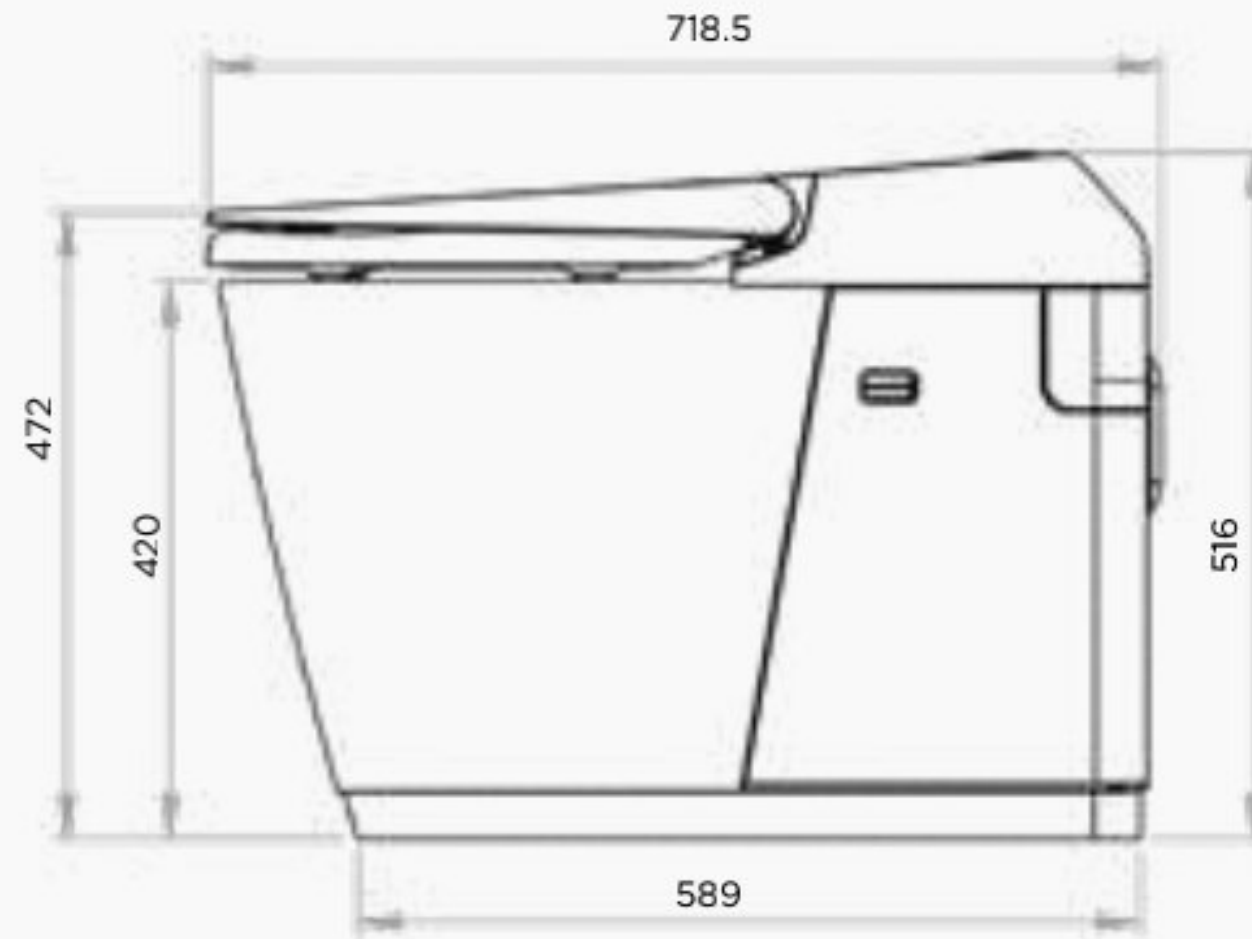

Sanicompact Comfort

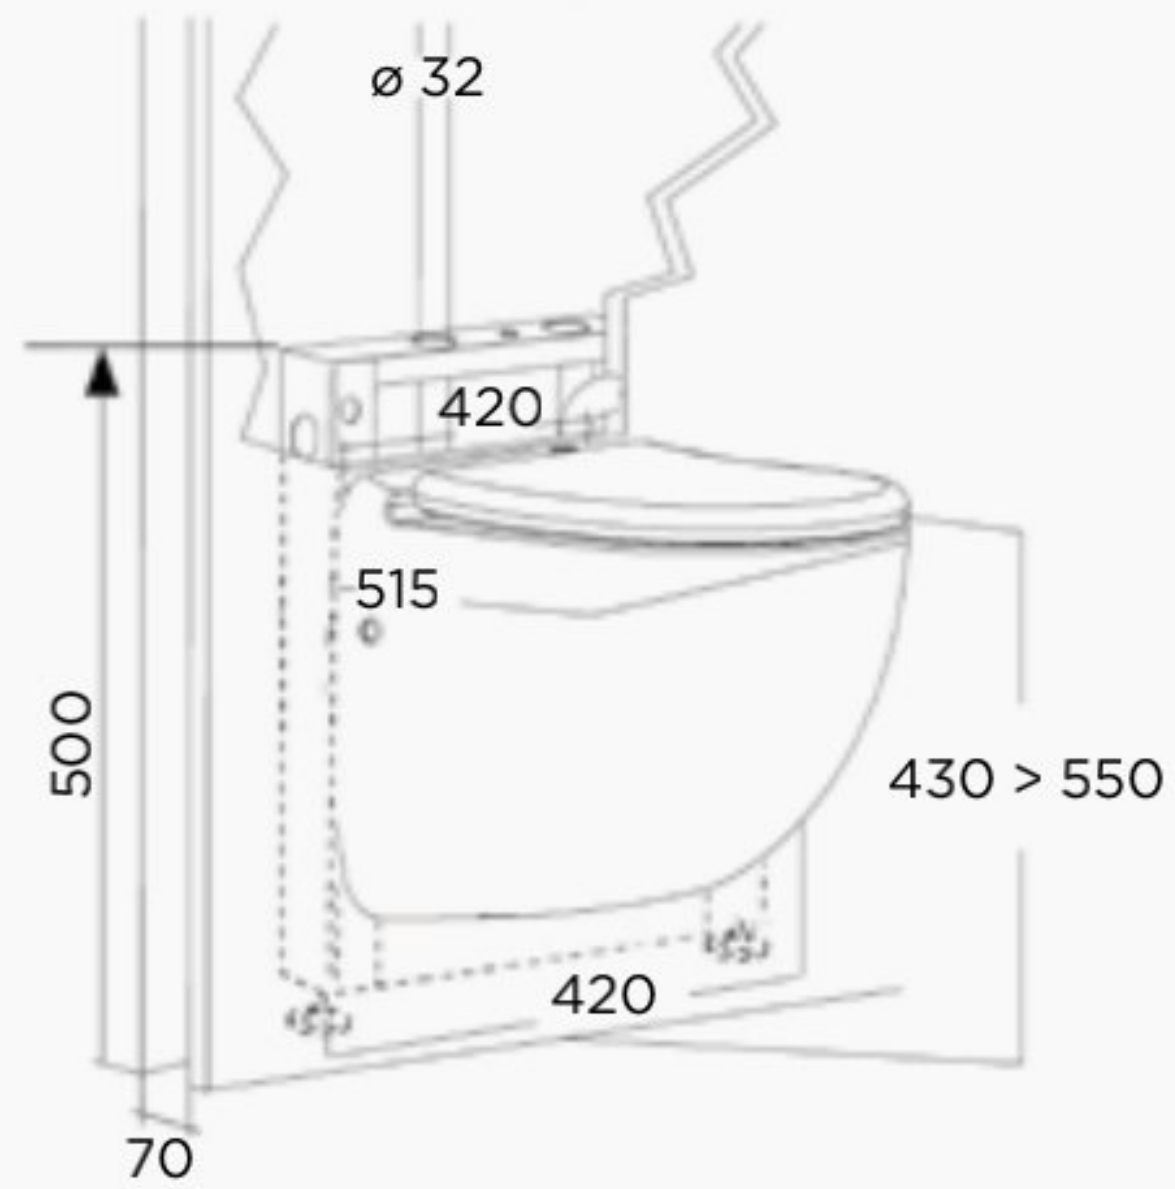

Sanicompact Comfort + / Bracket

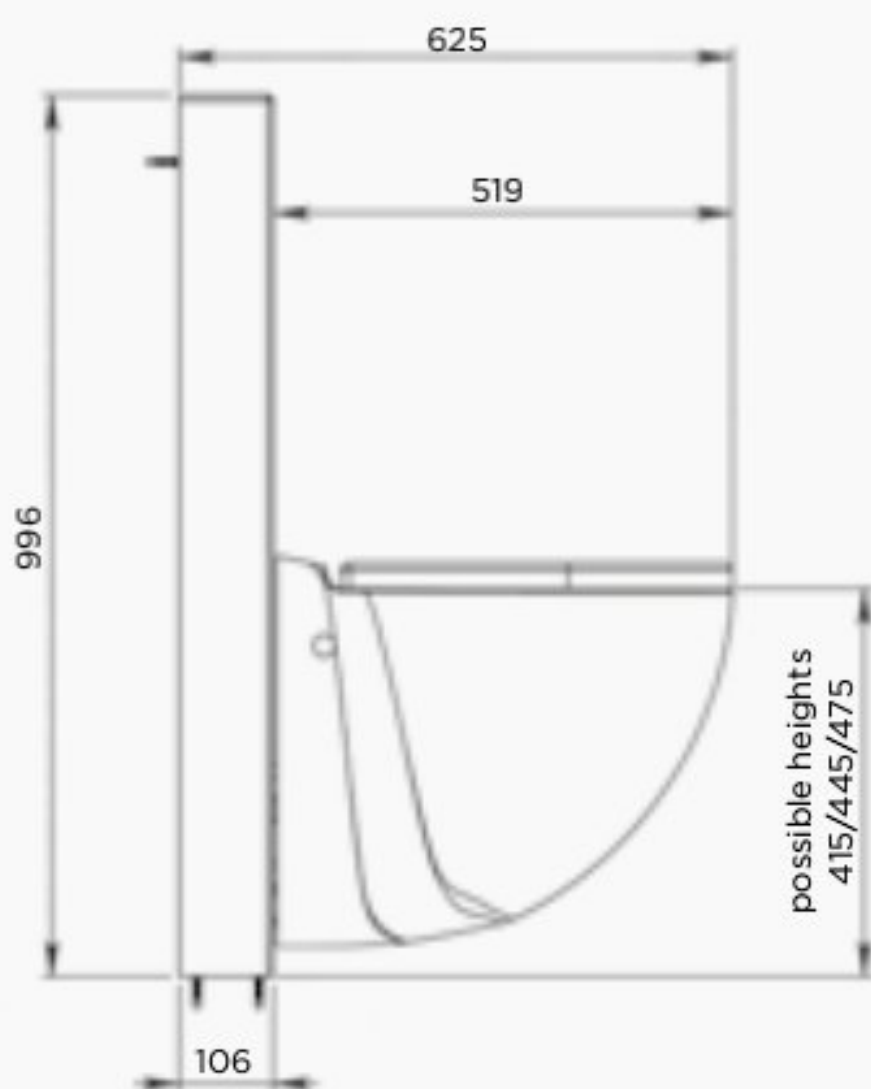

WHY GREY WATER PUMP?

SFA designs grey water pumps solutions that are easy to install, with no major works needed. Among these is the domestic pumps range, ideal for easily creating a new bathroom, kitchen, or laundry room.

SFA pumps help you to create a new bathroom, kitchen or laundry room wherever you want in the house, even in the absence of gravity drainage.

Easy to install, these small size pumps can be placed inside a cabinet. They are also extremely quiet. An ideal solution for creating an additional shower room and increasing privacy when friends are visiting or your family grows. What's more, this investment also increases the property's value. In fact, it is estimated that creating an additional shower room increases a property's value by almost 10%.

BEFORE



AFTER



Grey water pumps



	Walk-in shower	Shower tray	Tiled shower tray	Shower cubicle	Bidet	Wash basin	Bath	Washing machine	Dish washer	Sink
--	----------------	-------------	-------------------	----------------	-------	------------	------	-----------------	-------------	------

<p>Sanifloor+ 1 Walk-in shower: pump + plughole for tiled floors</p> <p>p.38</p>										
<p>Sanifloor+ 2 Walk-in shower: pump + plughole for flexible coverings</p>										
<p>Sanifloor+ 3 Walk-in shower: pump + plughole for standard shower tray</p>										
<p>Sanishower Flat Pump and siphon for flat shower tray</p> <p>p.40</p>										
<p>Sanishower Pump suitable for standard shower tray</p> <p>p.41</p>										
<p>Sanivite Pump suitable for installing a kitchen</p> <p>p.42</p>										
<p>Sanispeed Pump suitable for installing a laundry room or a kitchen</p> <p>p.43</p>										
<p>Saniaccess Pump The domestic pump for discharging grey water with low-cost maintenance</p> <p>p.44</p>										

- MULTIPLE FITTING OPTIONS: EASY TO INSTALL AND COMPACT
- A BATHROOM, A LAUNDRY ROOM OR A KITCHEN WHEREVER YOU WANT WITHOUT MAJOR WORK!

APPLICATIONS



Walk-in shower

PUMPING

3 m
30 m

WARRANTY



GREY WATER PUMPS



Sanifloor

The integrated detection system in the plughole is now **wireless**, for easier installation!



OPERATING PRINCIPLE

The water running into the siphon automatically activates the pump thanks to the integrated detection system in the plughole. The water is then sucked up and discharged to the main pipe.

TECHNICAL FEATURES

Shower tray height	0 cm
Max. distance between the pump and the siphon (horizontal)	3 m
Max. distance between the pump and the siphon (vertical)	30 cm

SEMI-TRANSPARENT VIEW



INSTALLATION DIAGRAM




PACKING LIST

- Sanifloor+ Pump + Plughole
- Coupler with check valve
- Flexible pipe with 3m steel spring

FEATURES OF THE PUMP

High drainage rate	30 L/min at 1 m
Ø of inlets	16 mm
Ø of discharge pipe	32 mm
Voltage	220-240 V/50 Hz
Max. absorbed intensity	1.7 A
Power rating	400 W
Electrical class	1
Maximum temperature of incoming grey water	35 °C
Protection rating (IP)	IP44

PUMP PERFORMANCE CURVE

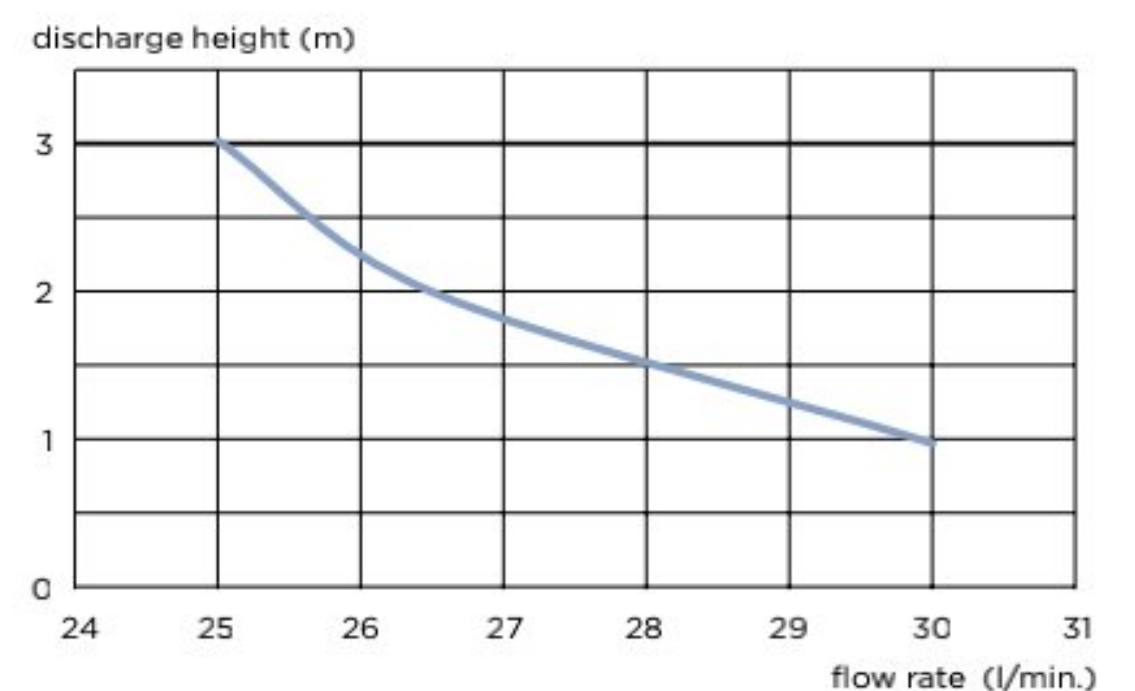



Sanifloor+1
Plughole for tiled floors supplied with a sealing mat



Sanifloor+ 2
Plughole for flexible coverings



Sanifloor+ 3
Plughole for standard shower trays with 90 mm plughole



Easy installation: wireless communication between the pump and plughole.

Easy to maintain: replaceable detection module.

Installation with no major work: little disbursement; small diameter drainage (32 mm).

Heavy flow (30 L/min): compatible with rainfall showers.



A walk-in shower, anywhere, without major work.

Easy maintenance thanks to the removable and cleanable hair filter (no screws).

REFERENCES

Sanifloor+ 1
EAN 3308815076232
HIFLOOR 1

Sanifloor+ 2
EAN 3308815076249
HIFLOOR 2

Sanifloor+ 3
EAN 3308815076164
HIFLOOR 3

PLUGHOLE FEATURES	
Outlet diameter	16 mm

TOTAL HEIGHT	
1. Plughole for tiled floors	68 mm
2. Plughole for flexible coverings	68 mm
3. Plughole for standard shower trays with 90 mm plughole	57 mm
Materials used	ABS / stainless steel


The **Sanifloor+** range offers 3 plughole versions for all the floor coverings on the market:

- **Sanifloor+ 1** for tiled floors
- **Sanifloor+ 2** for flexible floors
- **Sanifloor+ 3** for standard shower trays with 90 mm plughole




New removable and cleanable filter


Sanifloor+ 1

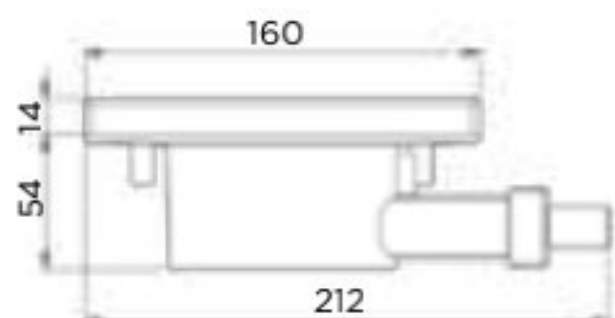

Sanifloor+ 3

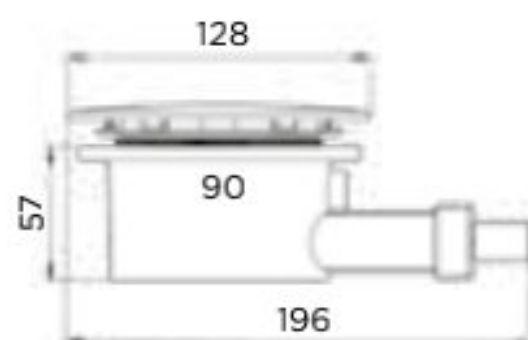

Sanifloor+ 2

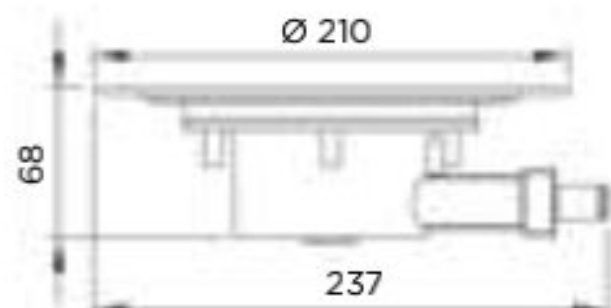

APPLICATIONS



Washbasin



Shower cubicle

PUMPING



WARRANTY



REFERENCE

EAN 3308815061016
D6STD



Sanishower Flat



Low starting level:
30 mm.

Ultra-flat siphon compatible
with most shower
trays on the market.




Specific pump and
plughole for flat shower tray.

Low shower tray: 8 cm.

Compact design
for discreet installation.




SEMI-TRANSPARENT VIEW

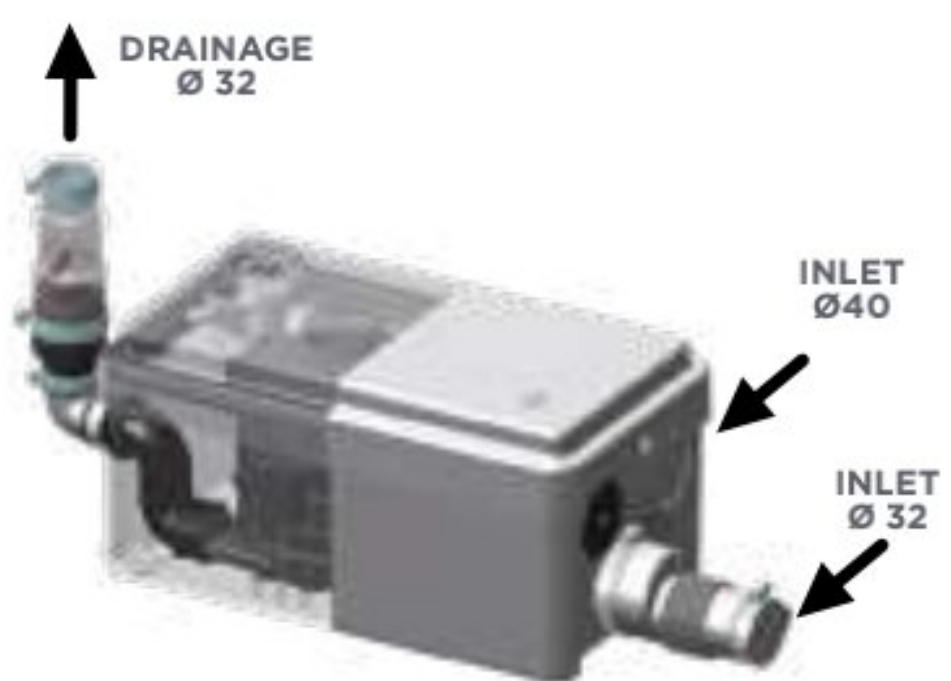

TECHNICAL FEATURES

Activation height	30 mm
Shower tray height	8 cm
Max. flow	45 L/min
Number of inlets	2
Ø of inlets	32 mm (shower) 40 mm (sink)
Ø of discharge pipe	32 mm
Voltage	220-240 V/50Hz
Power rating	250 W
Max. absorbed intensity	1.3 A
Electrical class	1
Maximum temperature of incoming grey water	35 °C
Protection rating (IP)	IP44
Weight	3.7 kg

PUMP PERFORMANCE CURVE

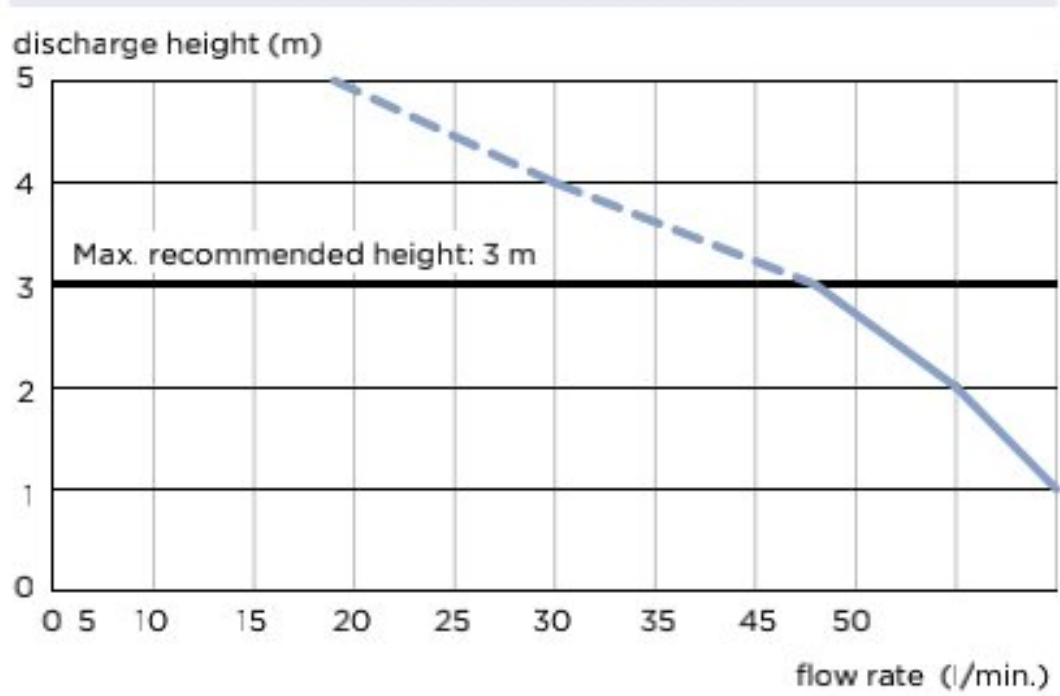

PACKING LIST


- Specific Sanishower Flat pump + plughole
- Flexible discharge elbows
- Check valve

INSTALLATION DIAGRAM





APPLICATIONS

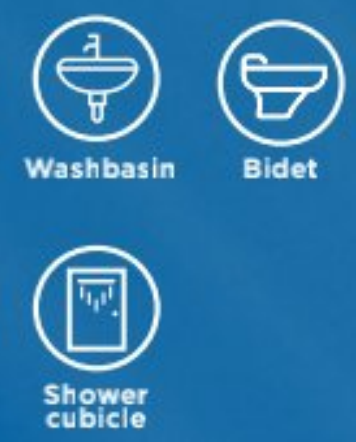

PUMPING



WARRANTY



REFERENCE
EAN 3308811598011
D2STD

GREY WATER PUMPS

Sanishower



Low starting level.



Pump suitable for standard shower tray.
Low noise level.
Aesthetic design for discreet installation.



SEMI-TRANSPARENT VIEW




TECHNICAL FEATURES

Activation height	60 mm
Shower tray height	12 cm
Max. flow	70 L/min
Number of inlets	2
Ø of inlets	32-40mm /40mm
Ø of discharge pipe	32 mm
Voltage	220-240 V/50 Hz
Power rating	250 W
Max. absorbed intensity	1.3 A
Electrical class	1
Maximum temperature of incoming wastewater	35 °C
Protection rating (IP)	IP44
Weight	4.6 kg

PACKING LIST

- Sanishower
- Check valve
- Connectors

PUMP PERFORMANCE CURVE

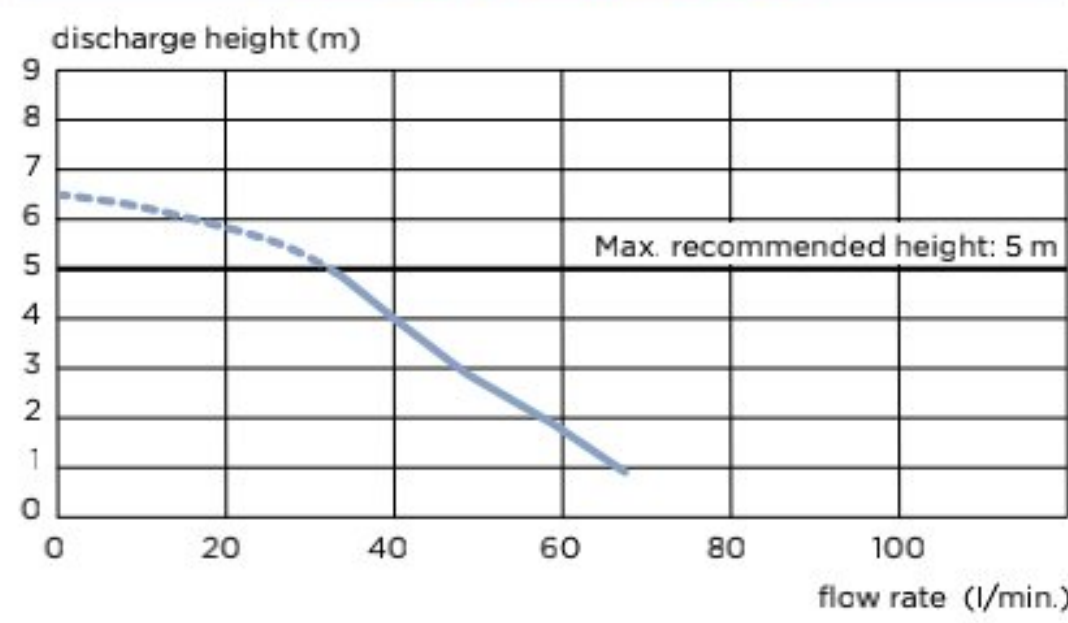

INSTALLATION DIAGRAM



APPLICATIONS



Dish washer



Sink



Washbasin



Bath



Shower cubicle



Bidet

GREY WATER PUMPS

PUMPING

5 m



WARRANTY



REFERENCE

EAN 3308811599018
SVSTD



Sanivite



Activated carbon filter.




Pump suitable for installing a laundry room or a kitchen.


Small dimensions.



SEMI-TRANSPARENT VIEW

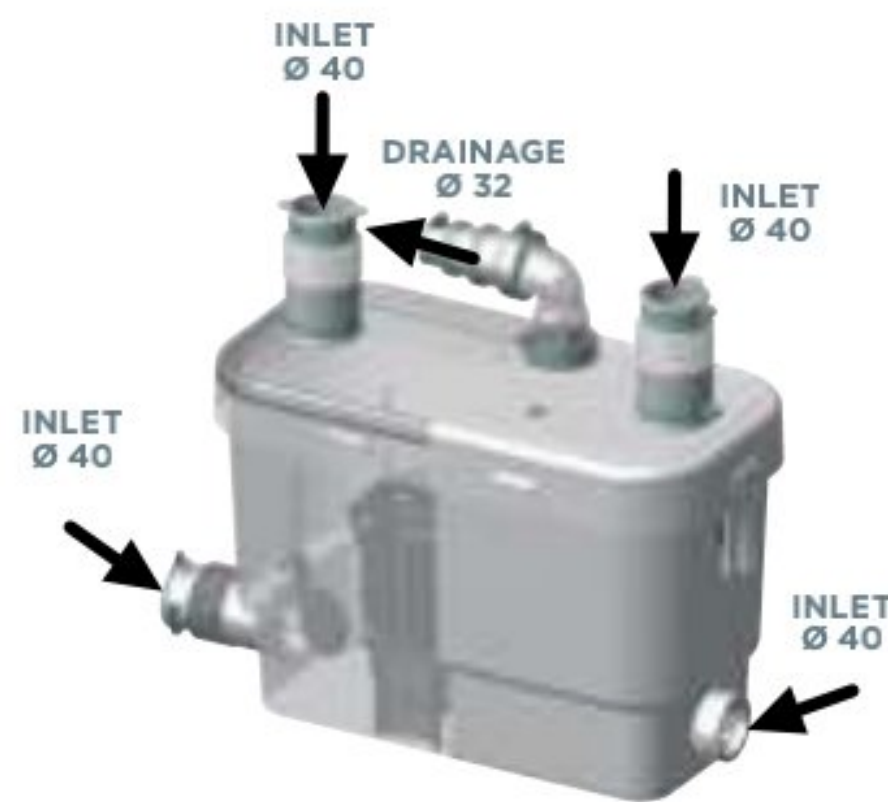

PUMP PERFORMANCE CURVE

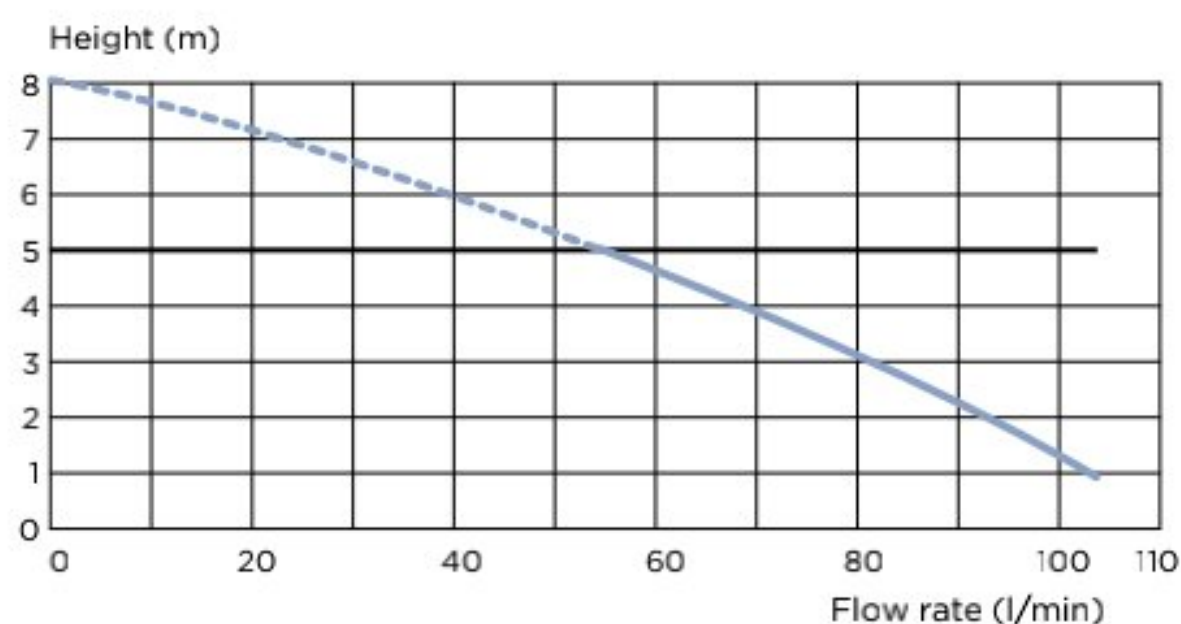

TECHNICAL FEATURES

Activation height	115 mm
Shower tray height	15 cm
Max. flow	100 L/min
Number of inlets	4
Ø of inlets	40 mm
Ø of discharge pipe	32 mm
Voltage	220-240 V/50 Hz
Power rating	400 W
Max. absorbed intensity	2 A
Electrical class	1
Maximum temperature of incoming wastewater	40°C - 60°C intermittently (max. 5 min)
Protection rating (IP)	IP44
Weight	6.4 kg

PACKING LIST

- Sanivite
- Check valve
- Connectors
- Activated carbon filter included to neutralise odours





APPLICATIONS



PUMPING



WARRANTY



REFERENCE

EAN 3308811579010
SSPSTD

GREY WATER PUMPS

Sanispeed



Ideal for installing a professional kitchen.

Flow rate: 110 L/min.




Pump suitable for the installation of a kitchen.

Water softener compatible.




SEMI-TRANSPARENT VIEW

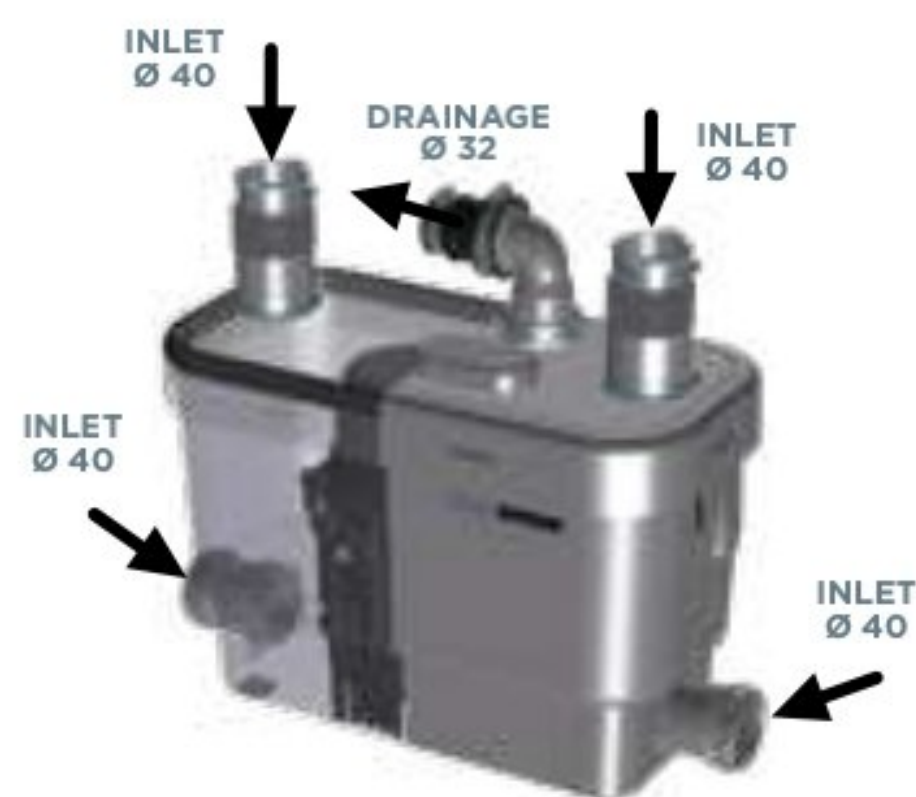

TECHNICAL FEATURES

Activation height	115 mm
Shower tray height	15 cm
Max. flow	110 L/min
Number of inlets	4
Ø of inlets	40 mm
Ø of discharge pipe	32 mm
Voltage	220-240 V/50 Hz
Power rating	400 W
Max. absorbed intensity	2 A
Electrical class	1
Maximum temperature of incoming wastewater	75°C intermittently (max. 5 min)
Protection rating (IP)	IP44
Weight	6.4 kg

PUMP PERFORMANCE CURVE

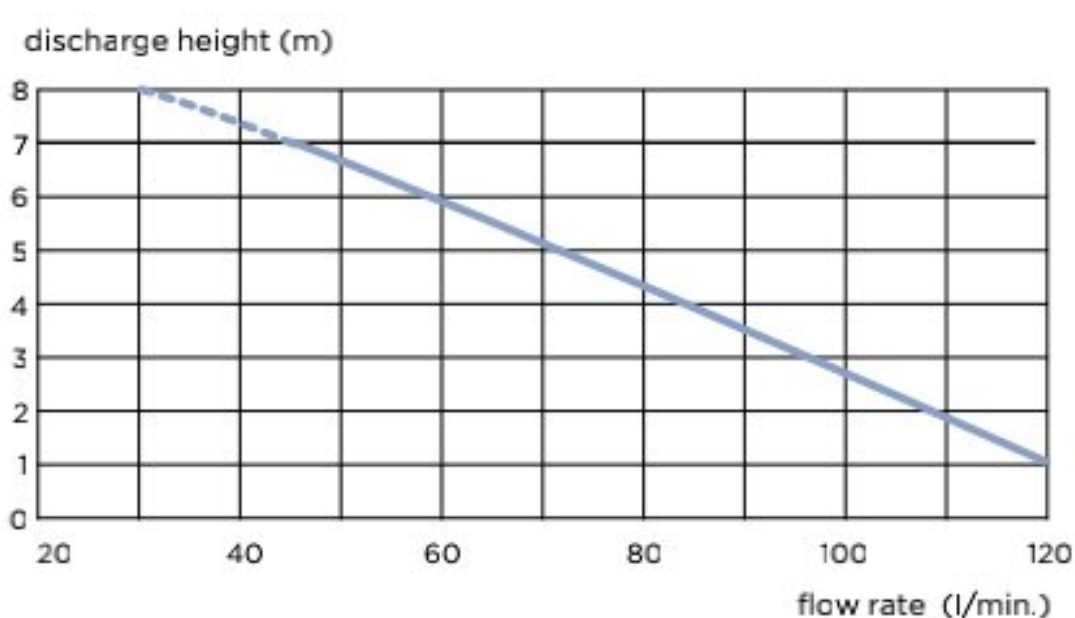

PACKING LIST

- Sanispeed
- Check valve
- Connectors
- Activated carbon filter included to neutralise odours



APPLICATIONS



PUMPING



WARRANTY



REFERENCE

EAN 3308815013190
SANIACCESS4



Saniaccess Pump



The domestic pump for grey water: easy maintenance.

Dual access to the product for maintenance.



Easy maintenance thanks to the dual product access, ideal for rental.

Low noise level: 46 dB(A).




DUAL ACCESS TO THE PRODUCT



- ➔ Direct access to the mechanical area in case of a blockage (foreign bodies)
- ➔ Direct access to the electricians to replace any faulty components

PUMP PERFORMANCE CURVE

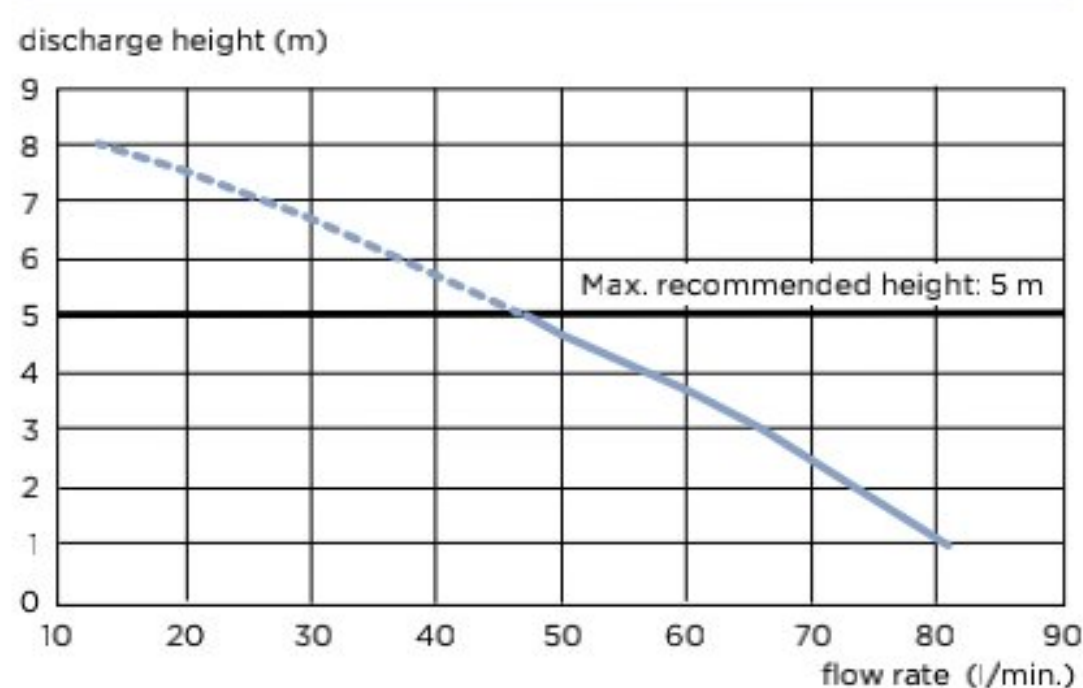

TECHNICAL FEATURES

Activation height	90 mm
Shower tray height	15 cm
Max. flow	80 L/min
Noise level	46 dB(A)
Number of inlets	3
Ø of inlets	40 mm
Ø of discharge pipe	32 mm
Voltage	220-240 V/50 Hz
Power rating	400 W
Max. absorbed intensity	1.7 A
Electrical class	1
Maximum temperature of incoming wastewater	75°C intermittently (max. 5 min)
Protection rating (IP)	IP44
Weight	6.4 kg

Suitable for use with water softener

PACKING LIST

- Saniaccess Pump
- Check valve and connectors supplied
- Connectors
- Carbon filter



INSTALL YOUR NEW SHOWER ANYWHERE



Sanifloor +1&2

Pump + plughole

Perfect for level access shower or wet room.

SHOWER ACCESS HEIGHT: 0 CM




Sanifloor +3

Pump + plughole

Perfect for level access shower or wet room.

SHOWER ACCESS HEIGHT: 2 CM

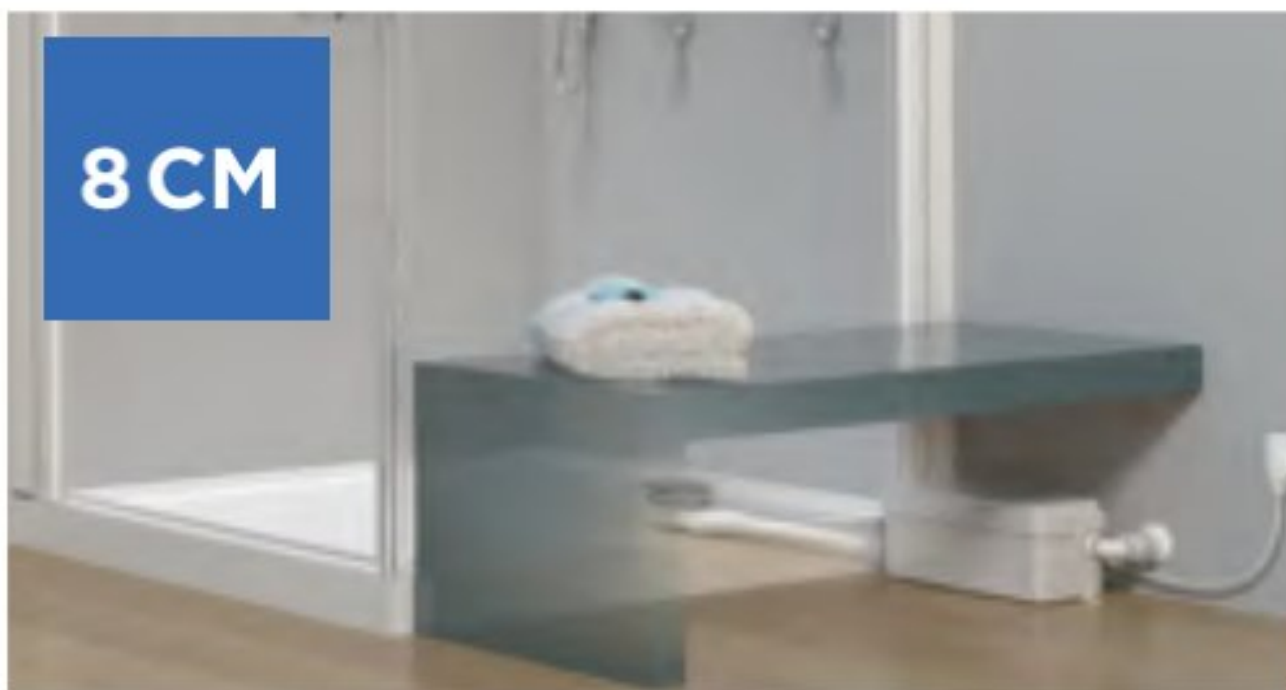

Sanishower Flat

Pump + plughole

For low level tray.

SHOWER ACCESS HEIGHT: 8 CM



Sanishower

Pump

Standard shower tray.

SHOWER ACCESS HEIGHT: 12 CM




Sanispeed Sanivite Saniaccess

Pumps


Standard shower tray.

SHOWER ACCESS HEIGHT: 15 CM


Sanifloor+

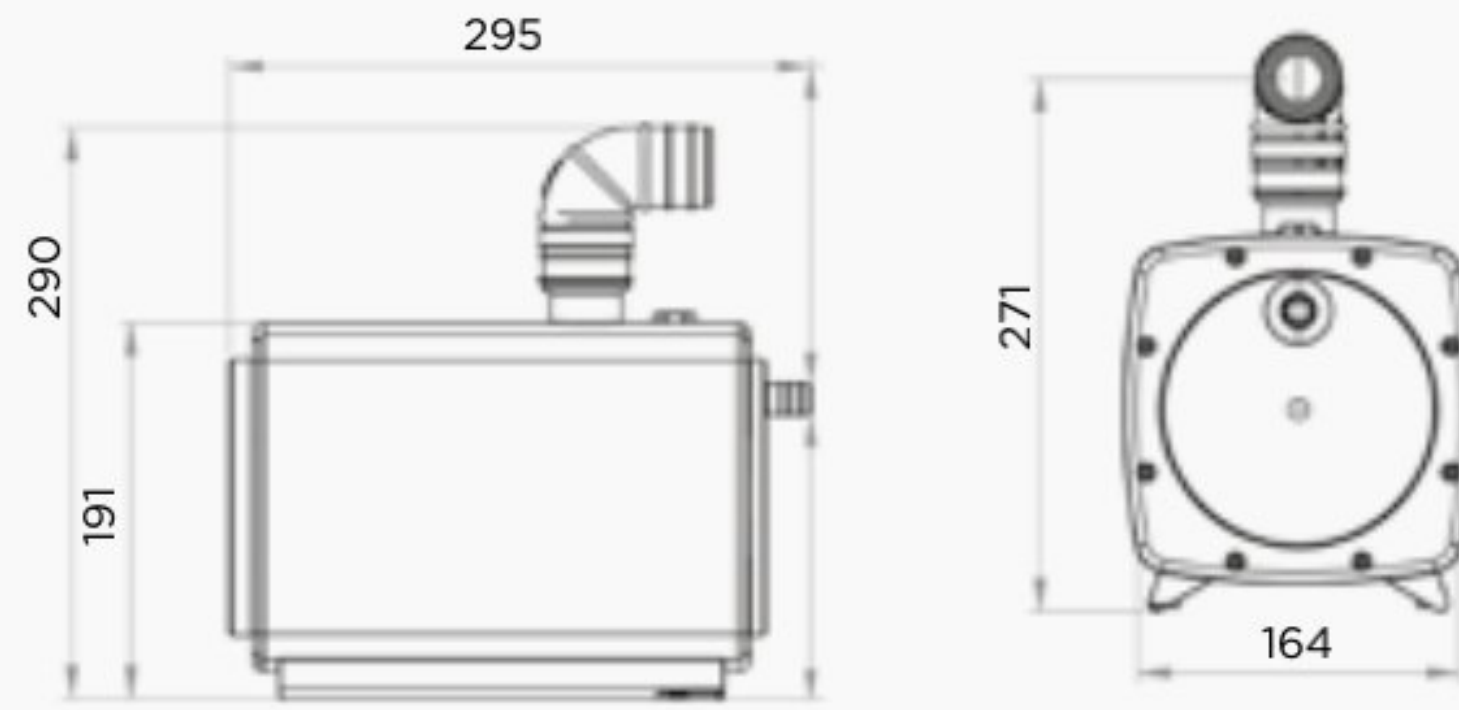


Sanifloor+ 1

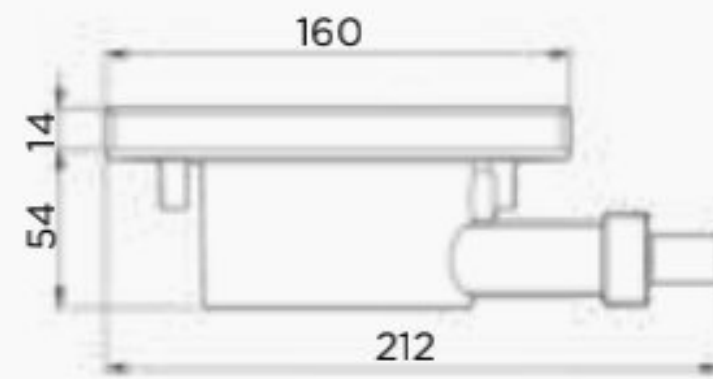


Sanifloor+ 2

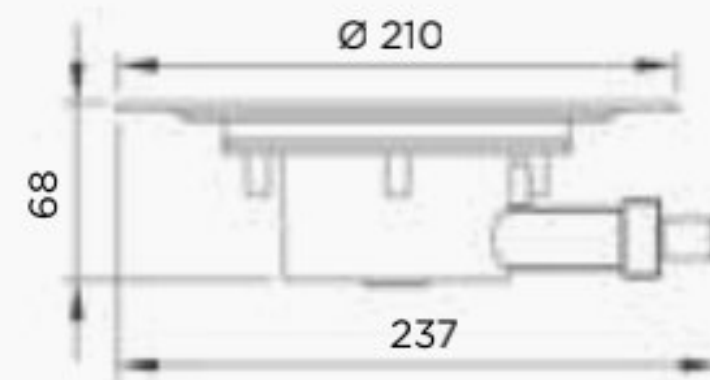


Sanifloor+ 3

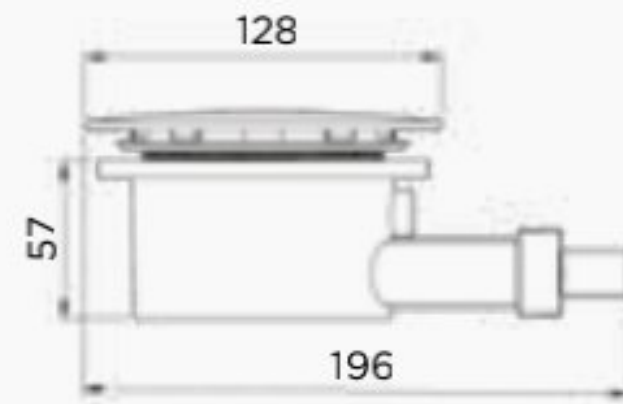

Sanishower Flat

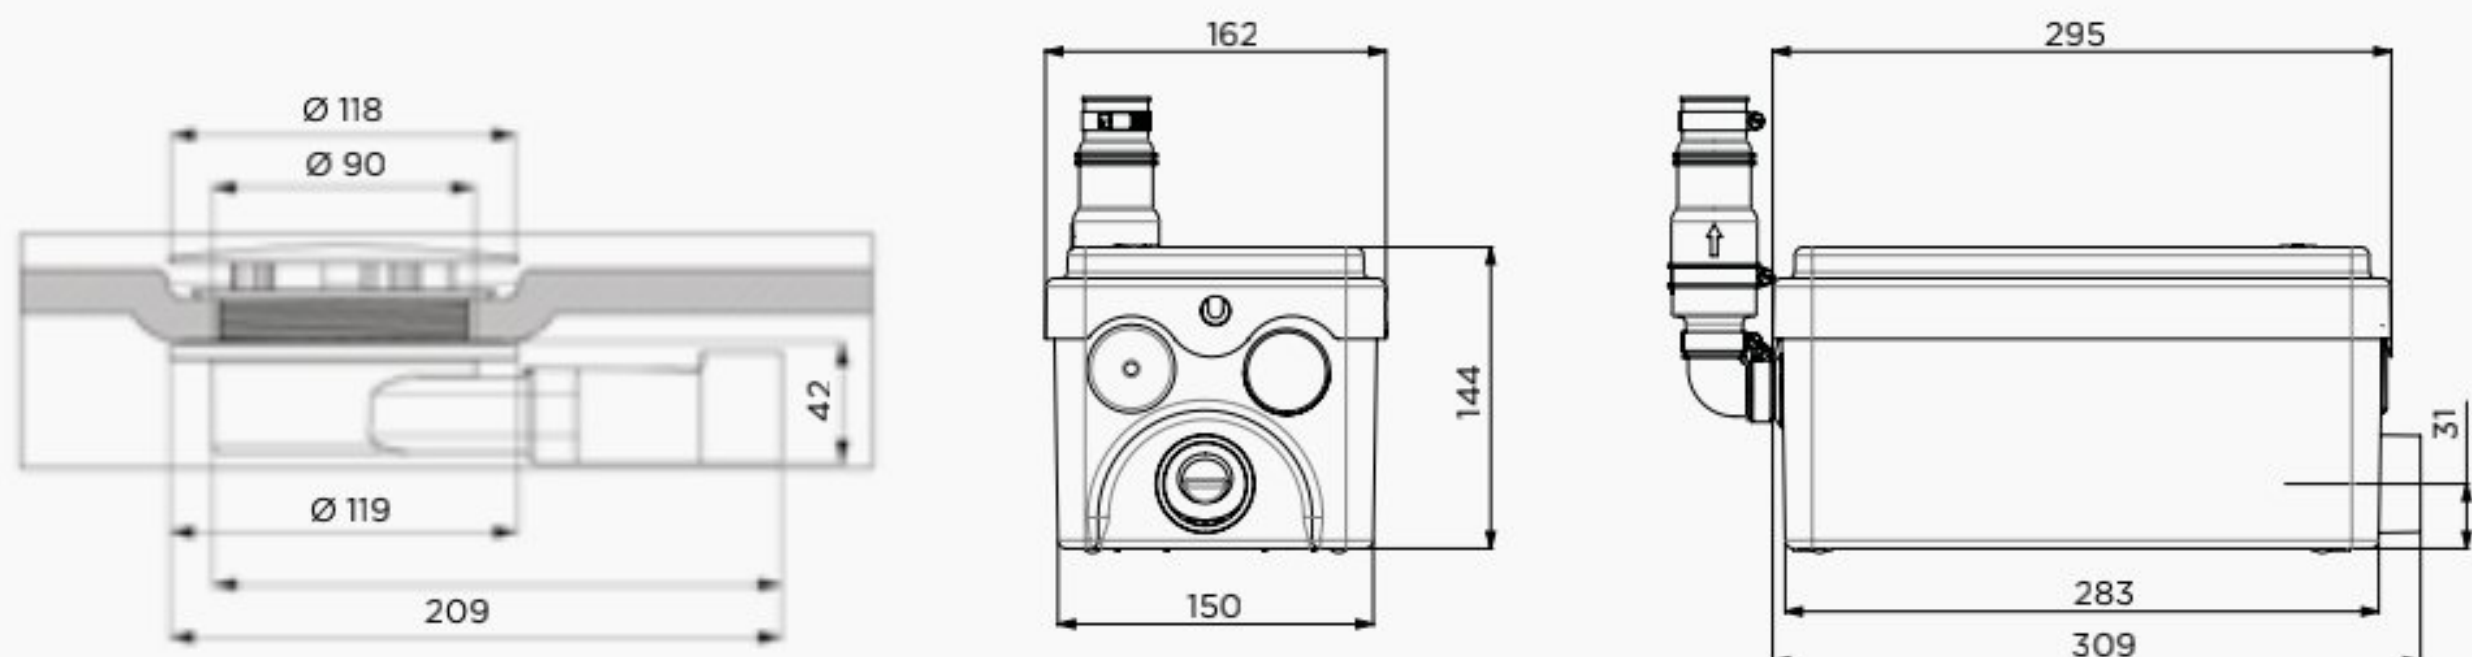


Sanishower

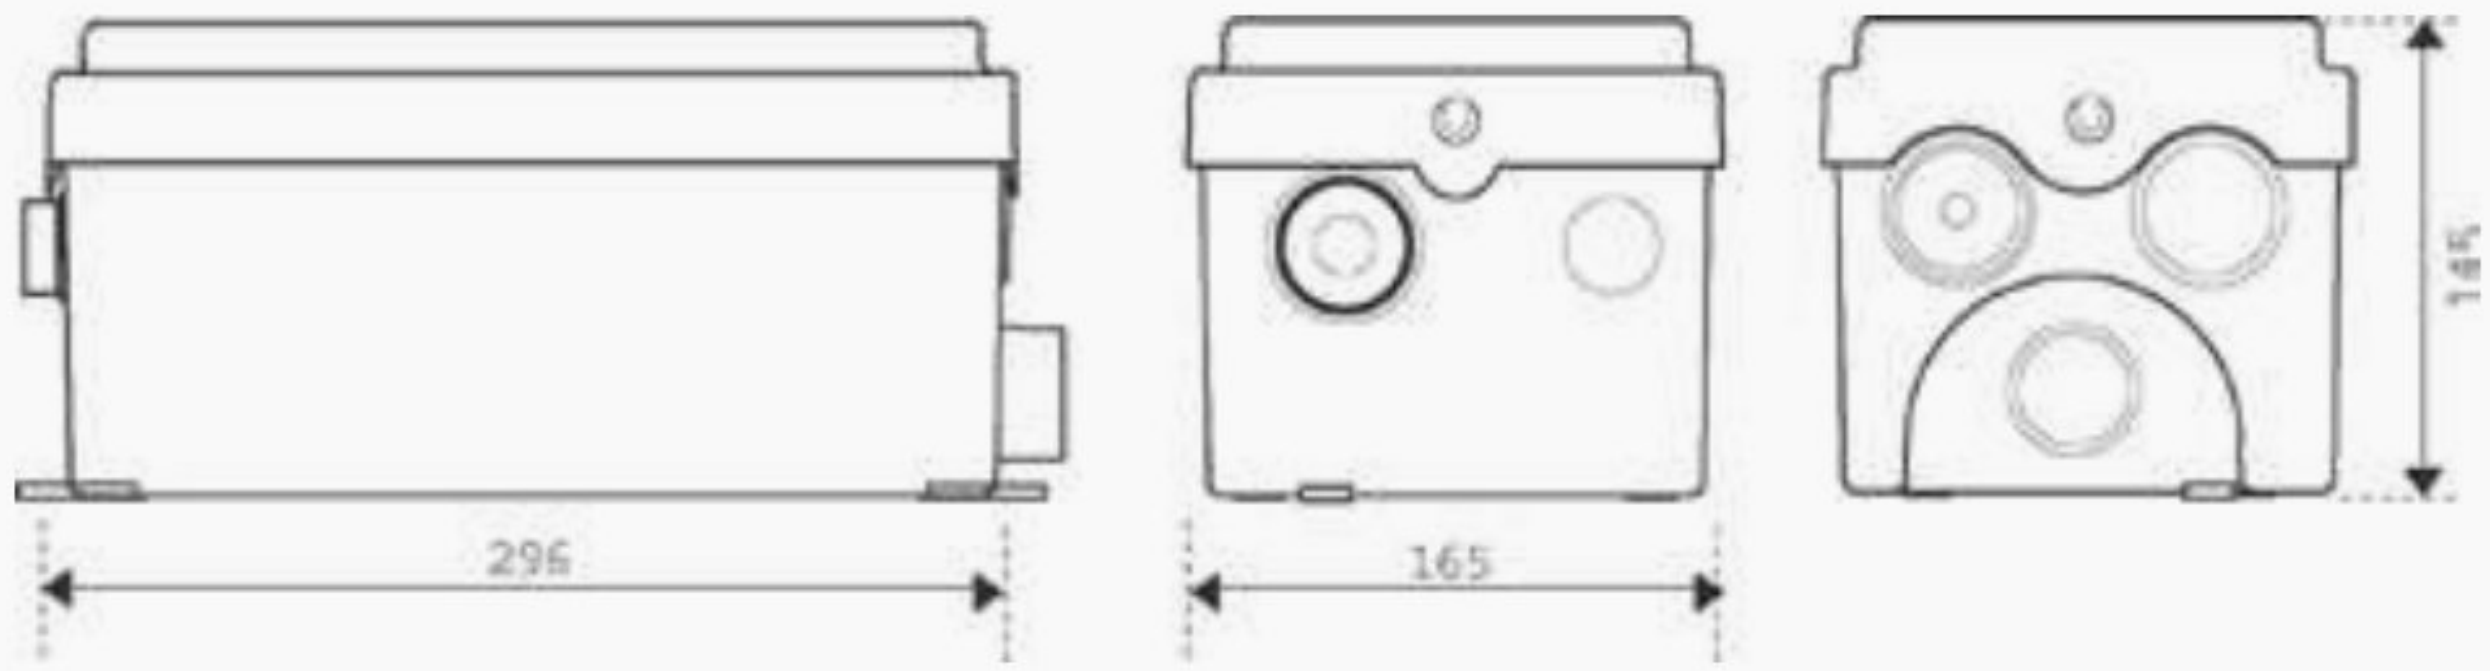


Sanispeed

Sanivite

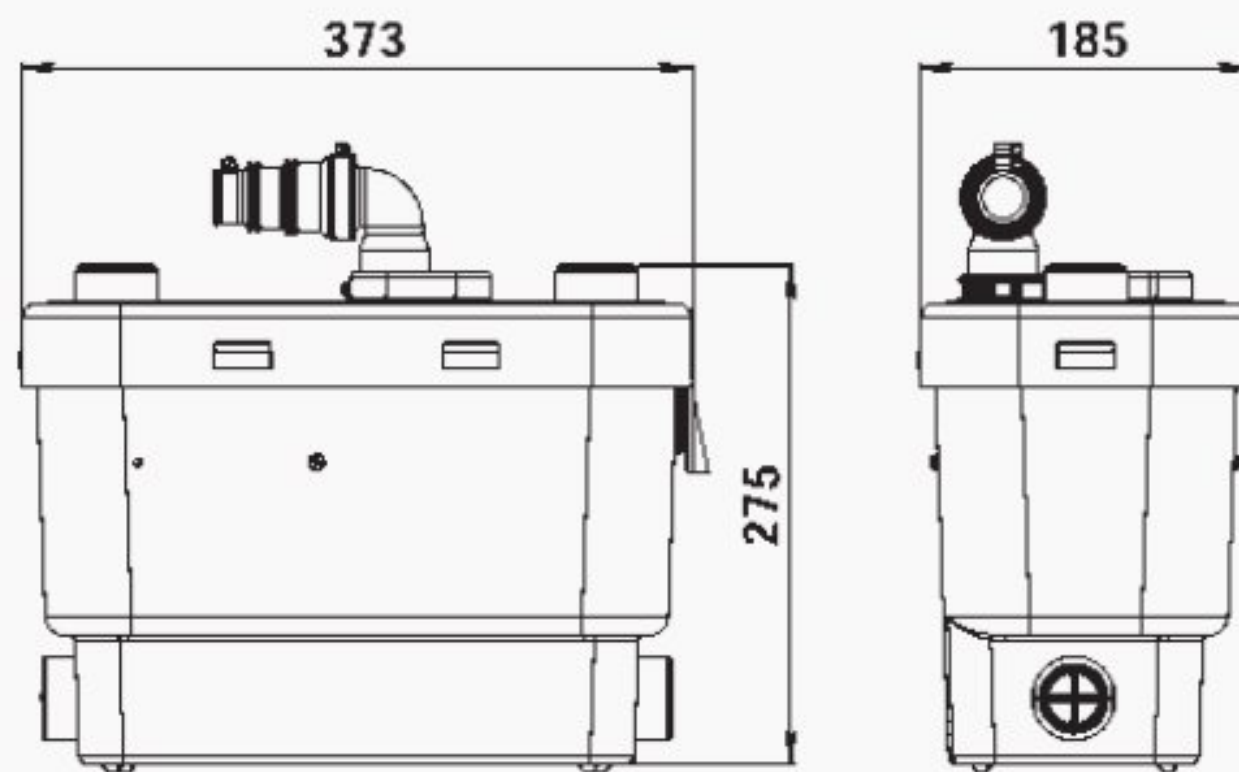

Saniaccess Pump

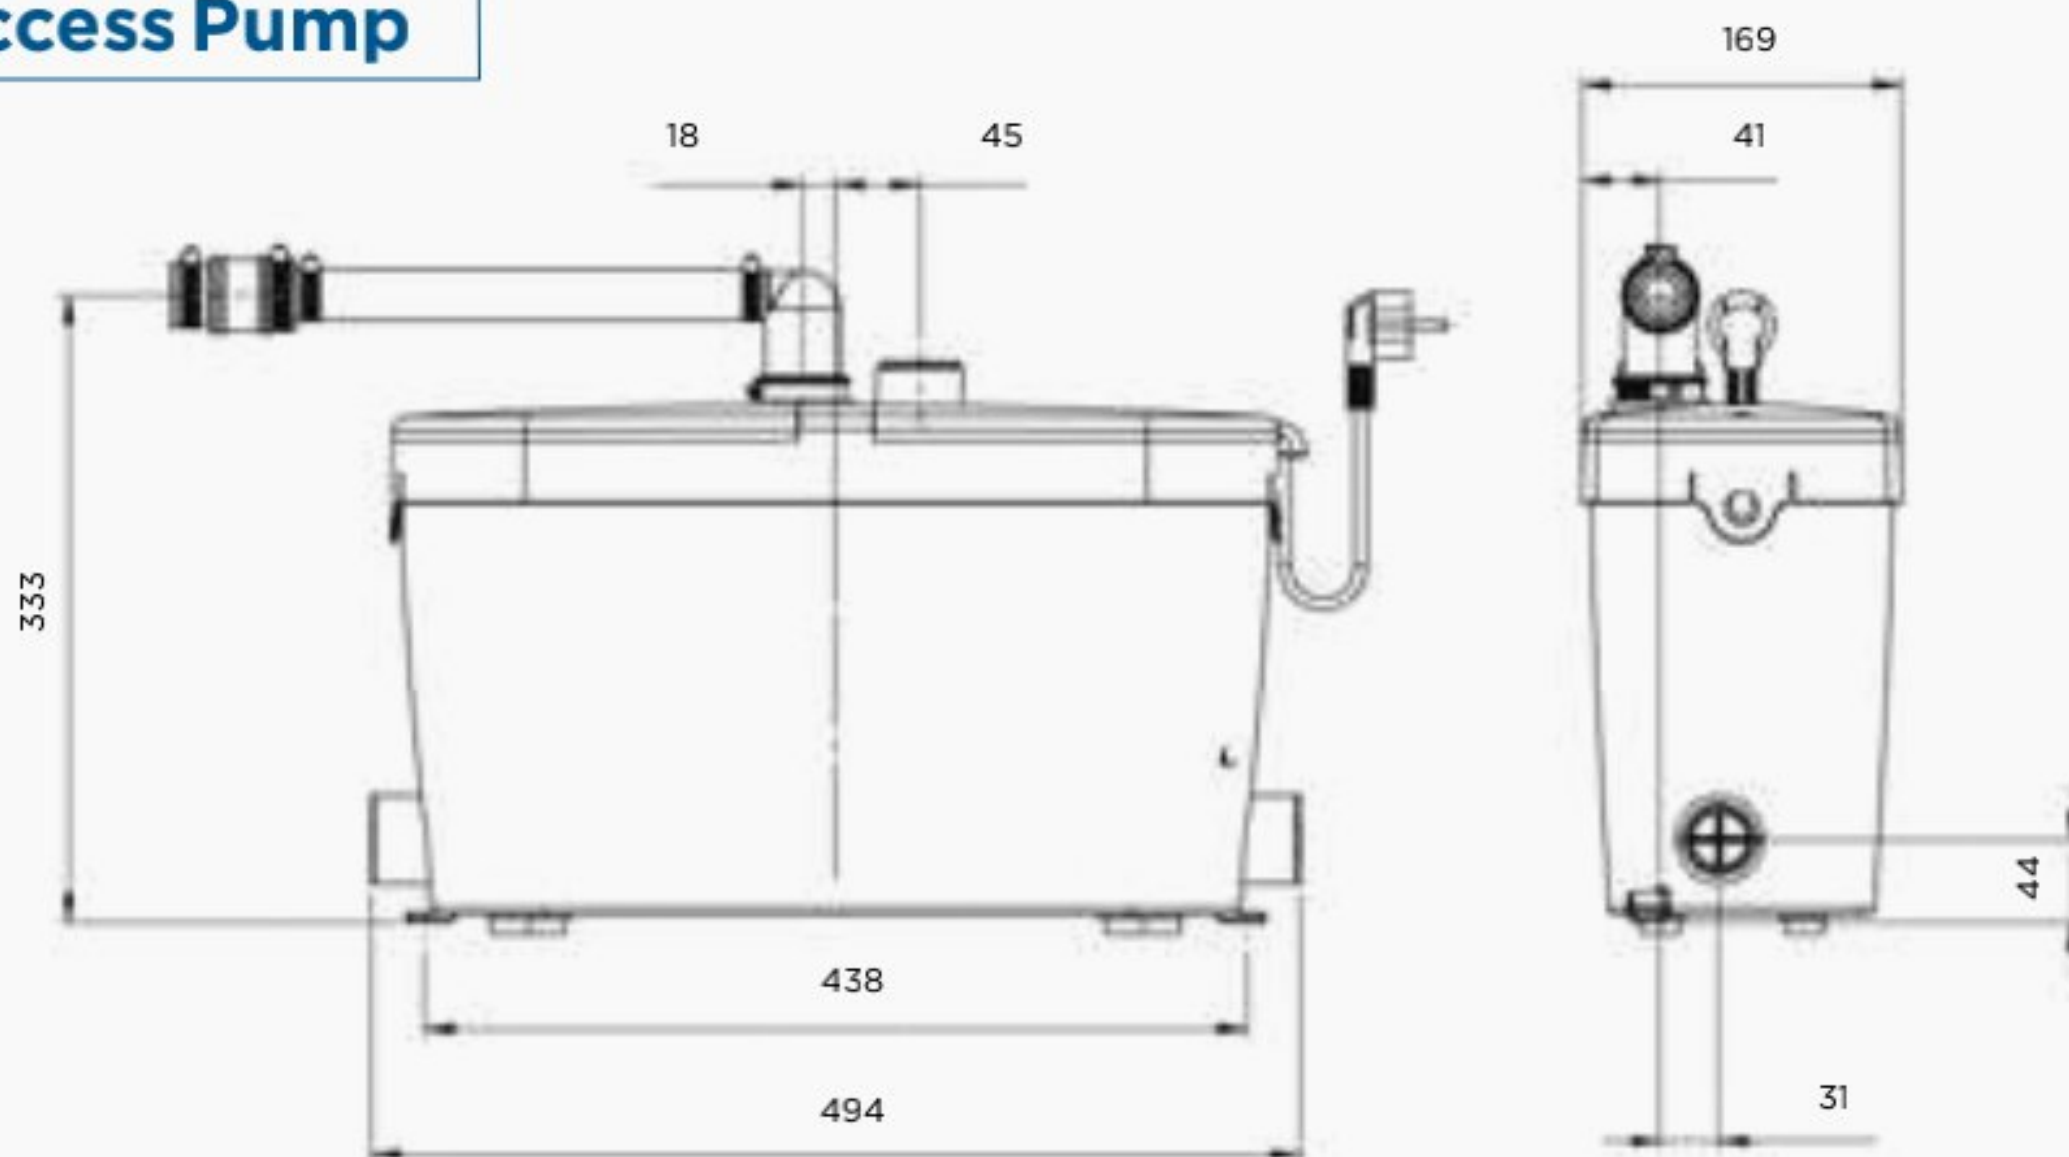

WHY SANISUB?

The SFA Sanisub range for all water discharge needs








Complete range of cellar pumps, dedicated to water lifting and more precisely to the evacuation of water from cellars, laundries, garages and other spaces subject to accidental and temporary flooding.

The Sanisub range offers steel and polypropylene bodies. Free passage from 1 to 30 mm and automatic starting with float or electronic level control. Sanisub range offers also solutions for aggressive water and hot water up to 90°C.



Cellar pumps

CELLAR PUMPS

			Clear waters		Dirty water		Wastewater: grey water	Corrosive water and/or saline water	 Individual
			Water boreholes, wells, sumps, swimming pools	Solid handling capacity < 1 mm	Flood waters, cellar drainage, run-off water, etc.	Solid handling capacity < 10 mm			
 <p>Sanipuddle Leave only 1 mm</p>	p.50	•						✓	
 <p>Sanisub 400 7 m immersion depth</p>	p.51	•	•			•		✓	
 <p>Sanisub ZPK To empty a cellar</p>	p.52	•	•	•		•		✓	
 <p>Sanisub S-ZPK For corrosive water</p>	p.53	•	•	•		•	•	✓	
 <p>Saniwell To lift clear water from wells or cisterns</p>	p.54	•	•			•		✓	
 <p>Sanisub Steel and Emergency Kit Complete stainless steel cellar pump</p>	p.56	•	•			•		✓	

- EASY TO USE
- PERFECT FOR EMERGENCY PUMPING
- HANDHELD
- AUTOMATIC RELEASE INCLUDED OR OPTIONAL ACCORDING TO THE MODEL

APPLICATIONS



Individual

PUMPING

7 m



WARRANTY



REFERENCE

EAN 3308815081427
SANIPUDDLE-001

CELLAR PUMPS



Sanipuddle



- Mop pump.
- Dries up to 1 mm of water.
- Built-in check valve.
- Double mechanical watertight seal.

APPLICATIONS


Emergency pumping

Portable pump for pumping pools
For cellars, pond, swimming pool and spa floors, lifts

PERFORMANCE

Max. height	7 m
Max. flow	5.5 m ³ /hr

PUMP PERFORMANCE CURVE

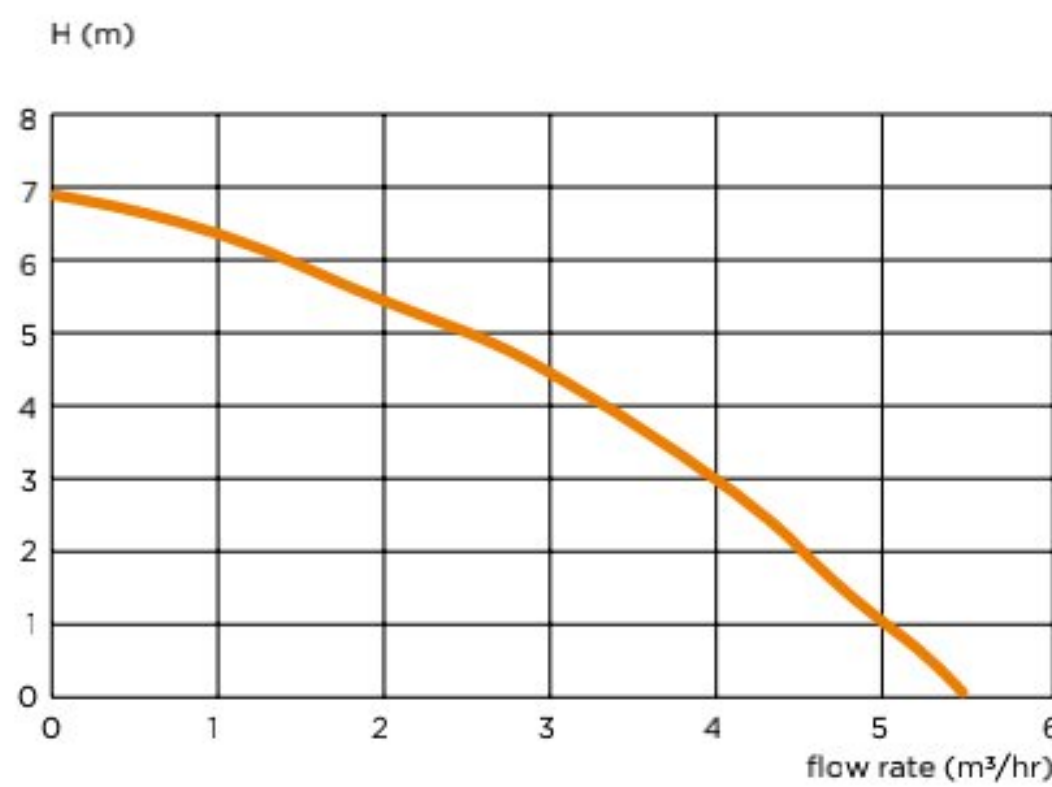

FEATURES

- Submersible pump for clear waters
- Made from polypropylene and stainless steel
- Double mechanical watertight seal
- Vertical pressure release 1 ¼" with DN 25 hose connector
- 5 m immersion depth
- Solid handling capacity 1 mm
- T° max. acceptable at 5 minute intervals: 70 °C
- Multi-channel wheel

PACKING LIST

- Sanipuddle pump
- 10 m power cable
- Check valve



ELECTRONIC LEVEL CONTROL FOR SANIPUDDLE
OPTIONAL
REF.: HYDRO-00048

REFERENCE	U (V)	P1 (W)	P2 (W)	FREQUENCY (HZ)	I MAX (A)	TR/MN	PROTECTION RATING (IP)	Q MAX (M ³ /HR)	H MAX (M)	WEIGHT (KG)
Sanipuddle	230	300	160	50-60	1.3	2,800	IP68	5.5	7	3.77

APPLICATIONS



Individual

PUMPING

7.5 m



WARRANTY



REFERENCE

EAN 3308815081632
SANISUB-005

CELLAR PUMPS

Sanisub 400



- Submersible pump.
- Automatic release.
- Built-in check valve.
- Sucks up to 5 mm without suction strainer.
- Floating ring seal provided.

APPLICATIONS


Emergency pumping

Drainage of cellars, water pumping from sumps and garages

PERFORMANCE

Max. height	7.5 m
Max. flow	7 m ³ /hr

PUMP PERFORMANCE CURVE

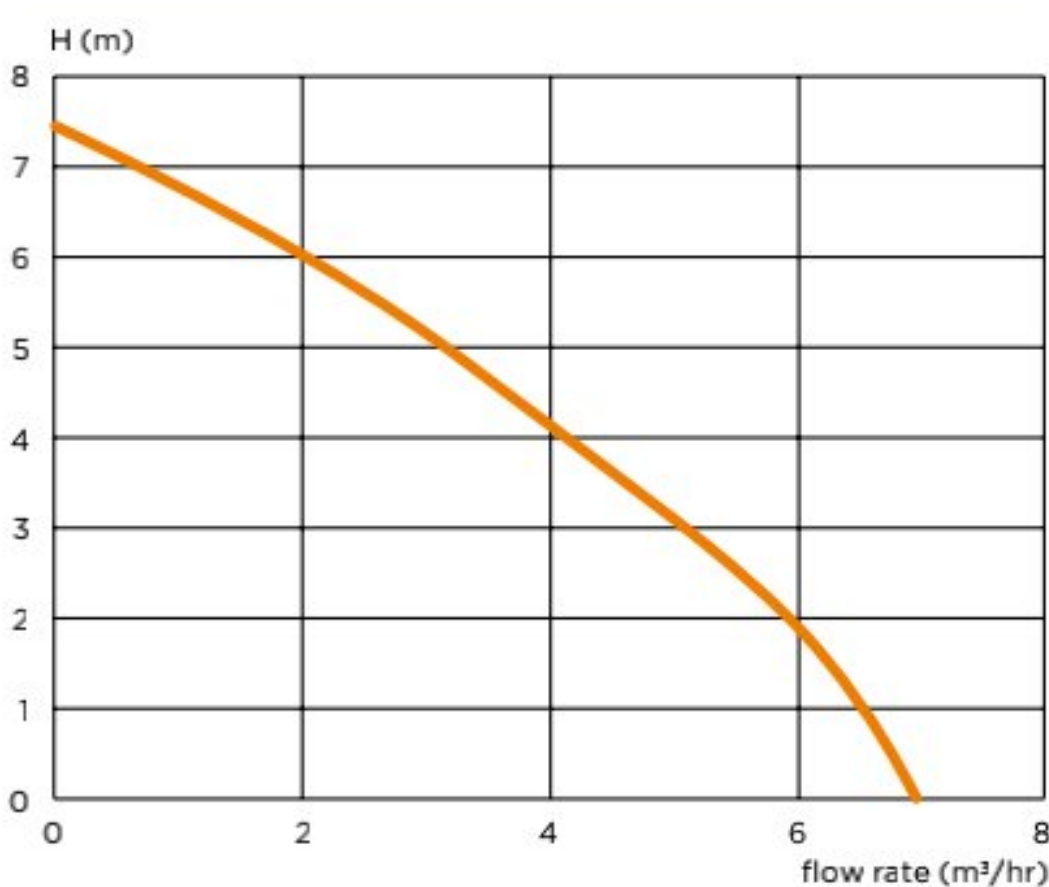

FEATURES

- Jacket cooled submersible pump for clear water
- Made from polypropylene and stainless steel
- Discharge pipe diameter 1 1/4"
- 7 m immersion depth
- Solid handling capacity 10 mm
- T° max. acceptable at 5 minute intervals: 70 °C
- Multi-channel wheel

PACKING LIST

- Sanisub 400 pump
- 10 m power cable
- 90° connection elbow with check valve
- Floating ring seal



Floating ring seal provided.

REFERENCE	U (V)	P1 (W)	P2 (W)	FREQUENCY (HZ)	I MAX (A)	TR/MN	PROTECTION RATING (IP)	Q MAX (M ³ /HR)	H MAX (M)	WEIGHT (KG)
Sanisub 400	230	400	180	50-60	1.4	2800	IP68	7	7.5	4.6

APPLICATIONS



Individual

PUMPING

7.5 m



WARRANTY



References:
Sanisub ZPK 30 A
 EAN 3308815081434
 SANISUB-001

Sanisub ZPK 40 A
 EAN 3308815081441
 SANISUB-002

CELLAR PUMPS



Sanisub ZPK



- Portable pump.
- Automatic release by adjustable float.
- Solid handling capacity from 10 to 30 mm.
- Built-in check valve.



APPLICATIONS

Portable pump for emergency pumping

Pumping clear water from cellars, garages, rainwater manholes, etc.

Drainage of grey household water without faeces (showers, washing machines, sinks, etc.)

FEATURES

Submersible pump for grey water, made from polypropylene and stainless steel

Discharge pipe diameter 1 1/4"

Fixable or spare float switch as standard


5 m immersion depth

Solid handling capacity of 10 mm for ZPK 30 A, 30 mm for ZPK 40 A

T° max. acceptable at 5 minute intervals: 90 °C

Multi-channel wheel

PUMP PERFORMANCE CURVE

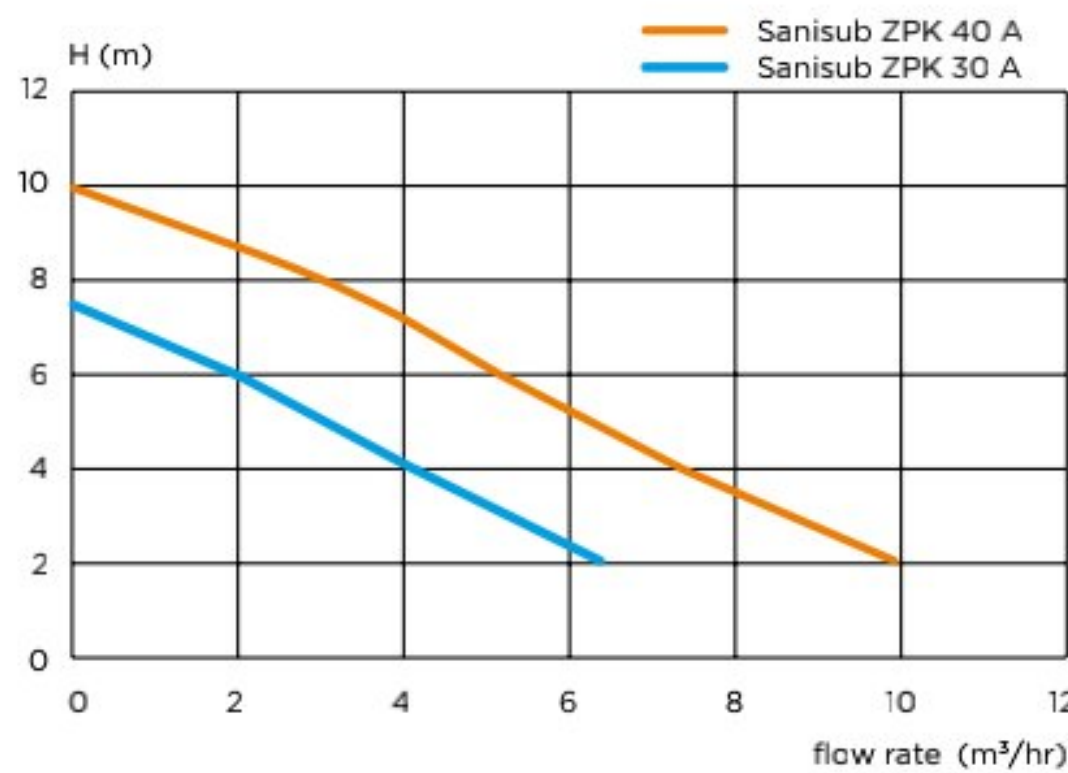

PERFORMANCE

Max. height 10 m

Max. flow 10 m³/hr

PACKING LIST

Sanisub ZPK pump

90° connection elbow (30 A DN 25, 40 A DN 32) with check valve

10 m power cable with plug

REFERENCE	U (V)	P1 (W)	P2 (W)	FREQUENCY (HZ)	I MAX (A)	TR/MN	PROTECTION RATING (IP)	Q MAX (M³/HR)	H MAX (M)	WEIGHT (KG)
Sanisub ZPK 30 A	230	300	130	50-60	1.3	2800	IP68	7	7.5	4.5
Sanisub ZPK 40 A		850	430		3.7			10	10	6.5

APPLICATIONS



Individual

PUMPING

10 m



WARRANTY



References:

Sanisub S ZPK 30 A
EAN 3308815081458
SANISUB-003

Sanisub S ZPK 40 A
EAN 3308815081465
SANISUB-004

Sanisub S ZPK



Portable pump for chemical aggressive or saline water (max. salt content 15%).

Automatic release by adjustable float.

Solid handling capacity from 10 to 30 mm.

Built-in check valve.

APPLICATIONS


Portable pump for emergency pumping

Drainage of brine water from softeners and corrosive or saline water (max. 15%)

Pumping clear water from cellars, garages, rainwater manholes, etc.

Drainage of grey household water without faeces (showers, washing machines, sinks, etc.)

PUMP PERFORMANCE CURVE

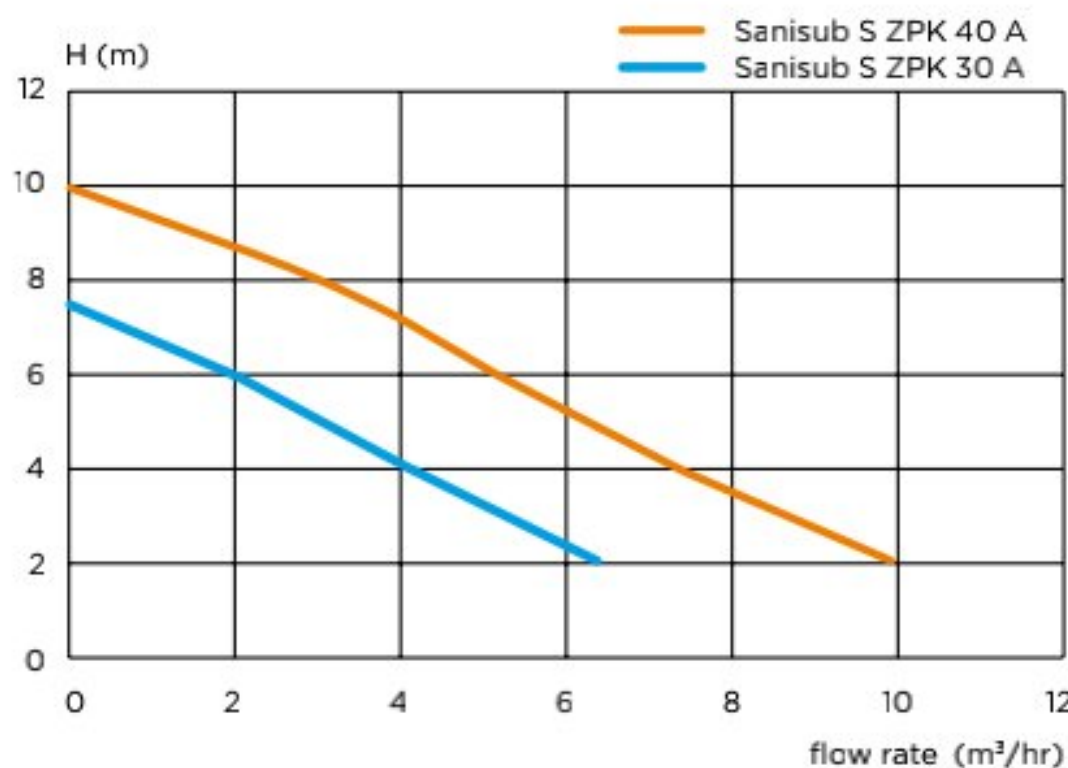

FEATURES

Submersible pump for grey water, made from polypropylene and stainless steel

Discharge pipe diameter 1 1/4"

Fixable or spare float switch as standard

Mechanical lining in silicon carbide and stainless steel 316 L crankcase

5 m immersion depth

Solid handling capacity of 10 mm for S ZPK 30 A, 30 mm for S ZPK 40 A

T° max. acceptable at 5 minute intervals: 90 °C

Multi-channel wheel

PERFORMANCE

Max. height 10 m

Max. flow 10 m³/hr

PACKING LIST

Sanisub S ZPK pump

90° connection elbow (30 A DN 25, 40 A DN 32) with check valve

10 m power cable with plug

REFERENCE	U (V)	P1 (W)	P2 (W)	FREQUENCY (HZ)	I MAX (A)	TR/MN	PROTECTION RATING (IP)	Q MAX (M³/HR)	H MAX (M)	WEIGHT (KG)
Sanisub S ZPK 30 A	230	300	130	50-60	1.3	2,800	IP68	7	7.5	4.5
Sanisub S ZPK 40 A		850	430		3.7					



APPLICATIONS



Individual

PUMPING

20 m




WARRANTY



REFERENCES

See table right page

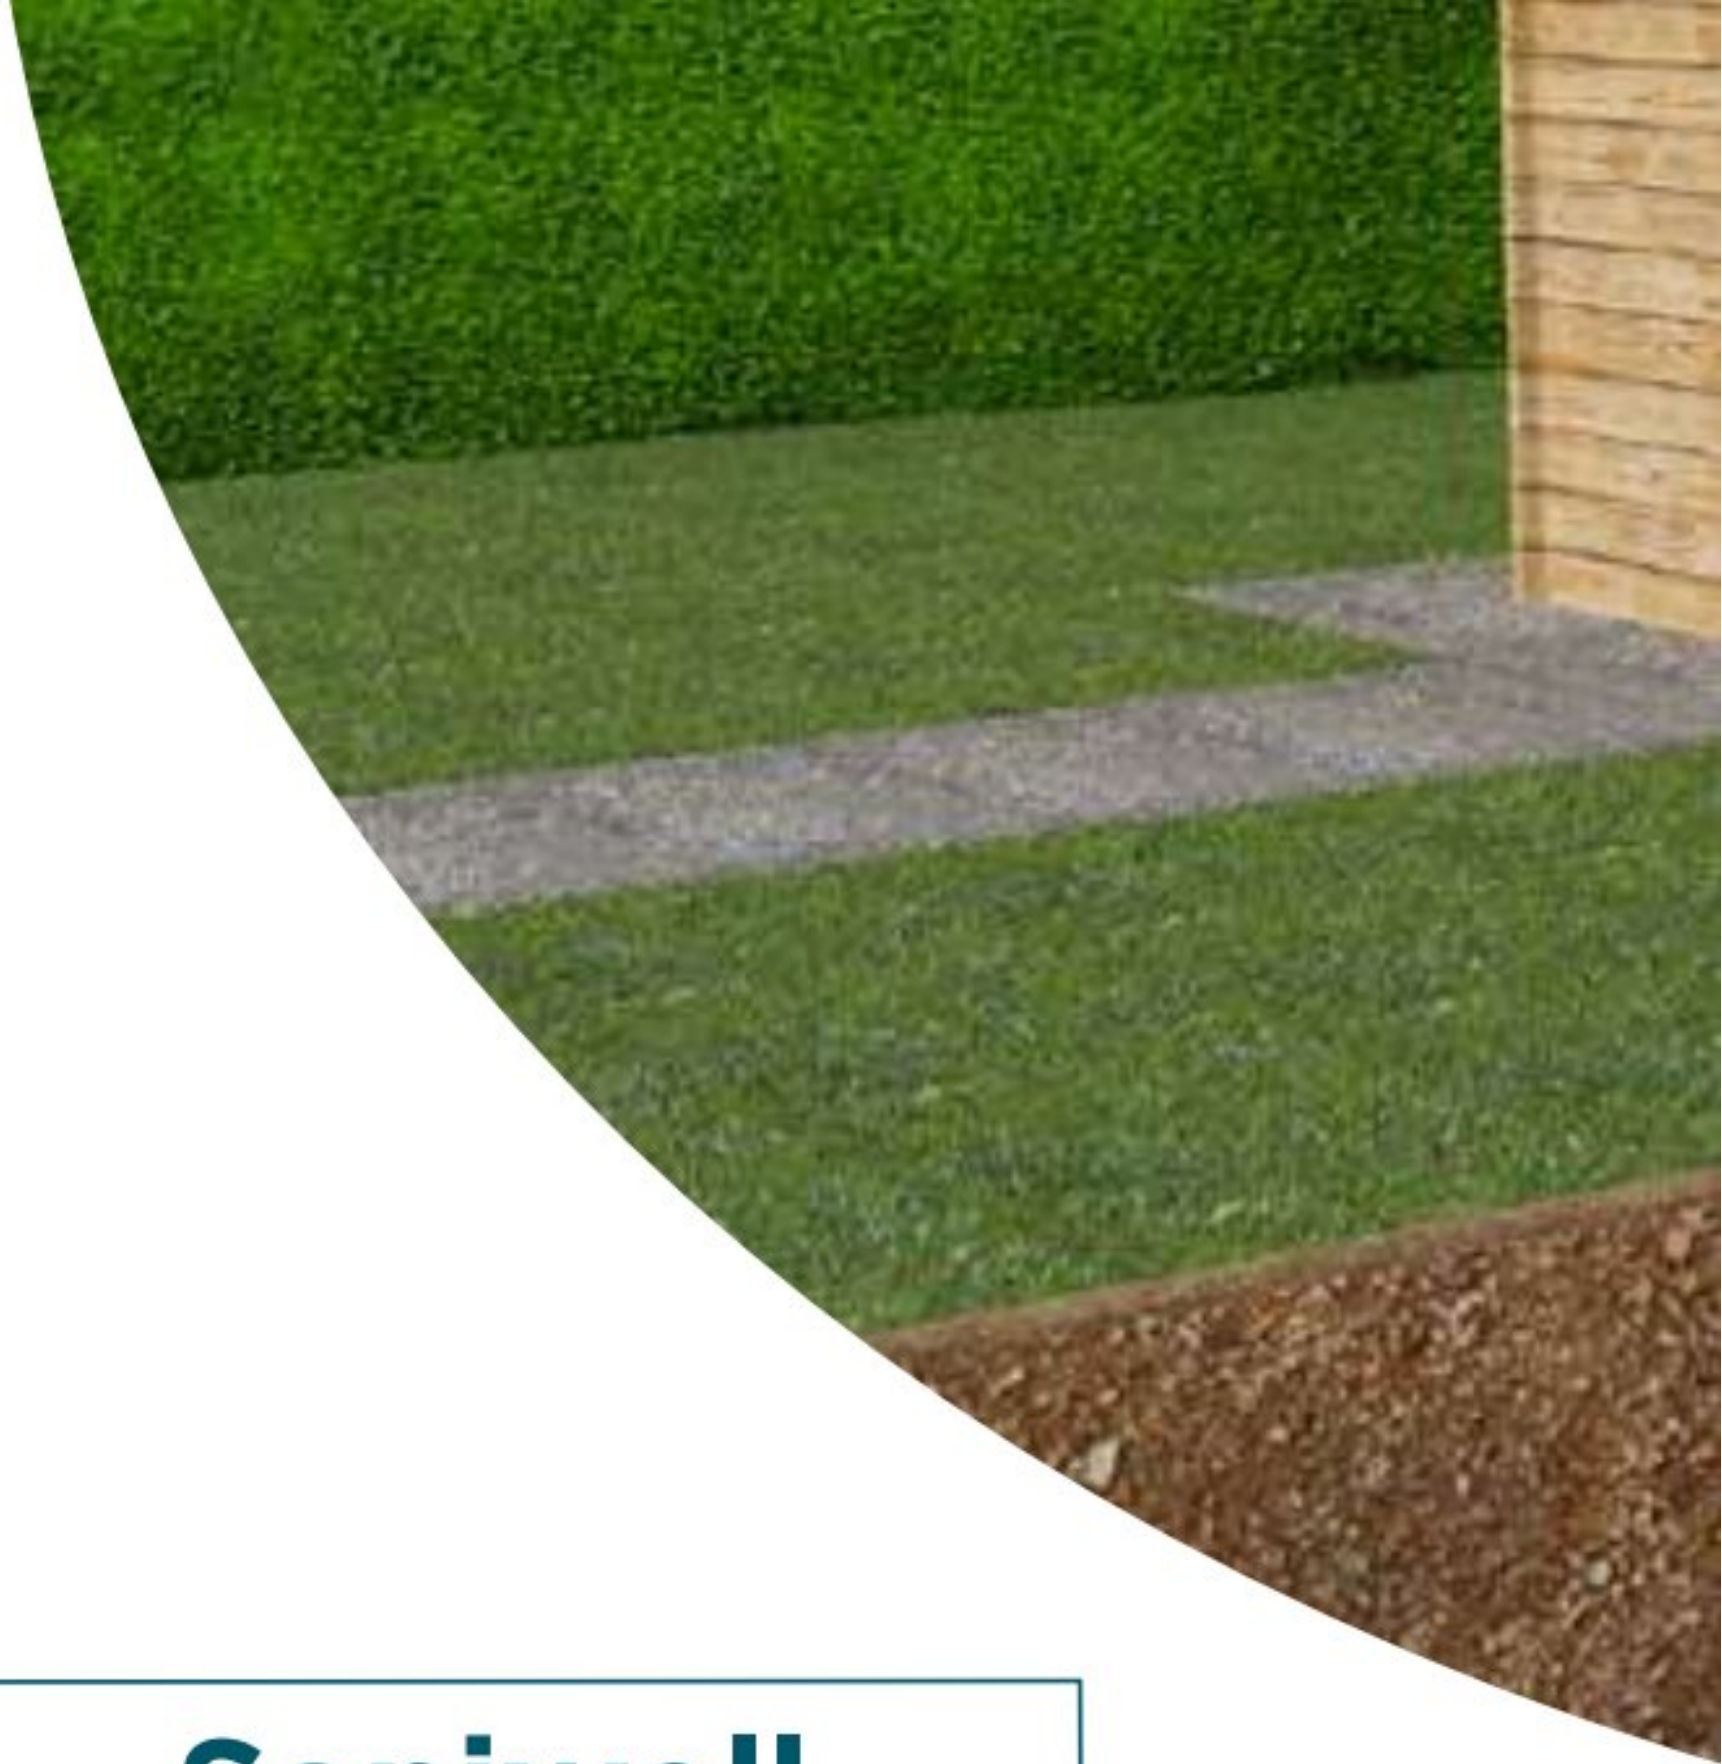

Saniwell



- Water-cooled motor.
- Submersible pump up to 20 m deep.
- Float switch supplied as standard in "MA" versions.
- 20 m power cable.



APPLICATIONS


Saniwell is a 5" multi-stage submersible pump designed to lift clear water from wells or cisterns used for general water supply or garden irrigation

Saniwell can lift water from a well up to 80 m, with a maximum submersion of 20 m.

FEATURES

- Water-cooled motor
- Submersible pump up to 20 m deep
- Float switch supplied as standard in "MA" versions
- 20 m power cable

PUMP PERFORMANCE CURVE

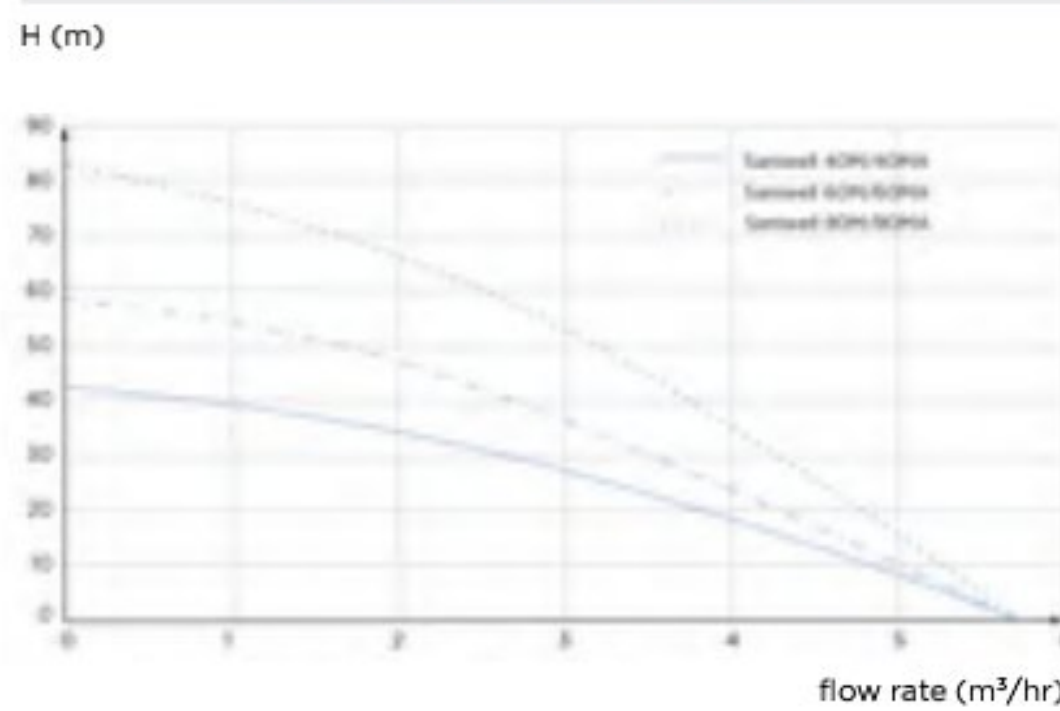

PERFORMANCE

Total manometric head	82 m
Max. flow	5.7 m³/hr

PACKING LIST

- Saniwell pump
- 90° connection elbow (30 A DN 25, 40 A DN 32) with check valve
- 20 m power cable with plug



Saniwell 40 M	Saniwell 40MA	Saniwell 60 M	Saniwell 60 MA	Saniwell 80 M	Saniwell 80 MA
---------------	---------------	---------------	----------------	---------------	----------------

MATERIALS

	Saniwell 40 M	Saniwell 40MA	Saniwell 60 M	Saniwell 60 MA	Saniwell 80 M	Saniwell 80 MA
Pump housing	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Shaft	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Waterproofing	Carbon/ceramic	Carbon/ceramic	Carbon/ceramic	Carbon/ceramic	Carbon/ceramic	Carbon/ceramic
Motor housing	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Impeller	PPO GF	PPO GF	PPO GF	PPO GF	PPO GF	PPO GF

ELECTRICAL FEATURES

	Saniwell 40 M	Saniwell 40MA	Saniwell 60 M	Saniwell 60 MA	Saniwell 80 M	Saniwell 80 MA
Voltage (V)	230	230	230	230	230	230
Frequency (Hz)	50-60	50-60	50-60	50-60	50-60	50-60
Power consumption P1 (W)	1000	1000	1250	1250	1800	1800
RPM (=revolution per minute)	2850	2850	2850	2850	2850	2850
Electrical class	I	I	I	I	I	I
Motor insulation class	F	F	F	F	F	F
Immersion depth (m)	20	20	20	20	20	20
Power cable: Length (m)	20	20	20	20	20	20
Power cable: Type, section	H07 RN-F , 1	H07 RN-F , 1	H07 RN-F , 1	H07 RN-F , 1	H07 RN-F , 1	H07 RN-F , 1

HYDRAULICS

	Saniwell 40 M	Saniwell 40MA	Saniwell 60 M	Saniwell 60 MA	Saniwell 80 M	Saniwell 80 MA
Total manometric head (m)	45	45	57	57	82	82
Max. flow rate (m ³ /h)	5.7	5.7	5.7	5.7	5.7	5.7
Discharge diameter G (pouces)	1"1/4	1"1/4	1"1/4	1"1/4	1"1/4	1"1/4
Particle size (mm)	1	1	1	1	1	1
Type of wheel	Multi-channel	Multi-channel	Multi-channel	Multi-channel	Multi-channel	Multi-channel
Type of activation	Manual	Float	Manual	Float	Manual	Float

IDENTIFICATION AND LOGISTICS

	Saniwell 40 M	Saniwell 40MA	Saniwell 60 M	Saniwell 60 MA	Saniwell 80 M	Saniwell 80 MA
Gross weight (kg)	12	12	13	13	15	15
EAN code	3308815081472	3308815081489	3308815081496	3308815081502	3308815081519	3308815081526
Factory code	SANIWELL-001	SANIWELL-002	SANIWELL-003	SANIWELL-004	SANIWELL-005	SANIWELL-006

APPLICATIONS



Individual

PUMPING

7.5 m



WARRANTY



REFERENCE

EAN 3308815082639
SANISUBSTEEL-101

CELLAR PUMPS



Sanisub Steel

AND EMERGENCY KIT



- Submersible pump.
- Automatic release.
- Optimised motor cooling.
- Complete kit.



Pump only reference:

EAN 3308815081700
SANISUBSTEEL-001

APPLICATIONS

Emergency pumping


For lightly soiled clear water

For water discharge from ponds, tanks and flooded cellars

PERFORMANCE

Max. height	8 m
Max. flow	9 m ³ /hr

PUMP PERFORMANCE CURVE

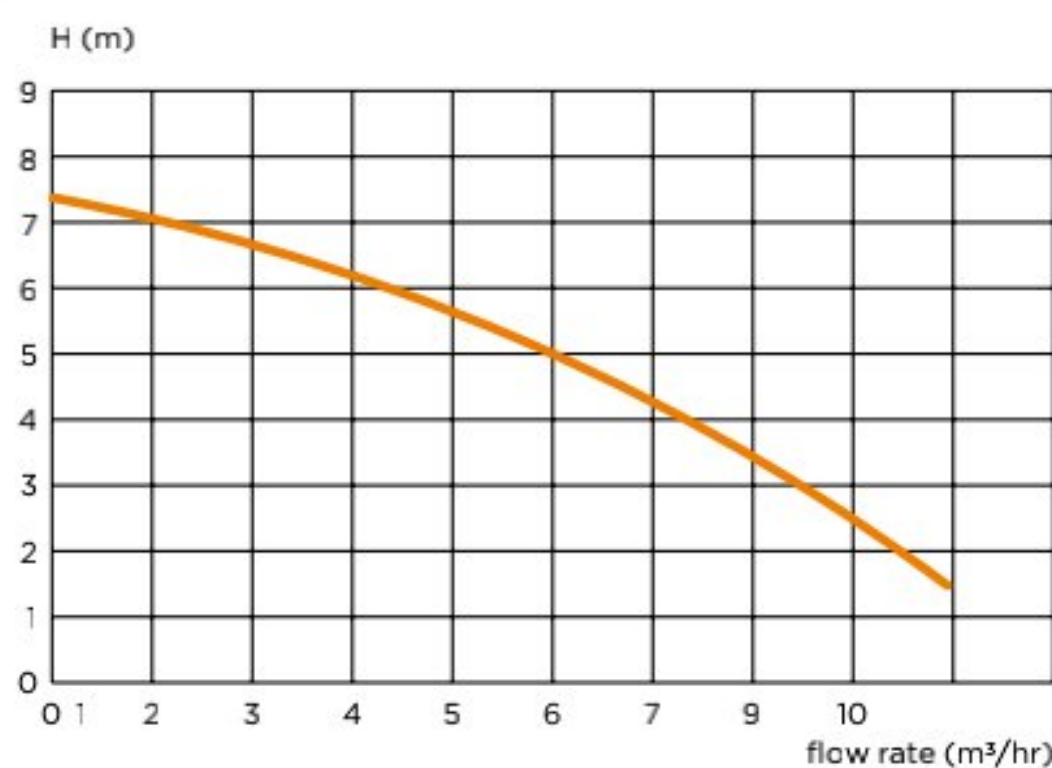

FEATURES

- Portable design in stainless steel
- Integrated motor protection
- Modular release thanks to the cable tie eyelet on the float
- Discharge pipe diameter 1 1/4"
- 5 m immersion depth
- Solid handling capacity 10 mm
- T° max. acceptable at 5 minute intervals: 70 °C
- Multi-channel wheel


PACKING LIST

- Stainless steel pump
- Basket with fixing kit
- Retaining cannula
- 15 m drain hose with quick symmetrical connectors
- 10 m power cable


REFERENCE	U (V)	P1 (W)	FREQUENCY (HZ)	I MAX (A)	TR/MN	PROTECTION RATING (IP)	Q MAX (M ³ /HR)	H MAX (M)	WEIGHT (KG)
Sanisub STEEL EMERGENCY KIT	230	450	50-60	2	2,800	IP68	9	8	13

Sanisub ZPK


Sanisub S ZPK

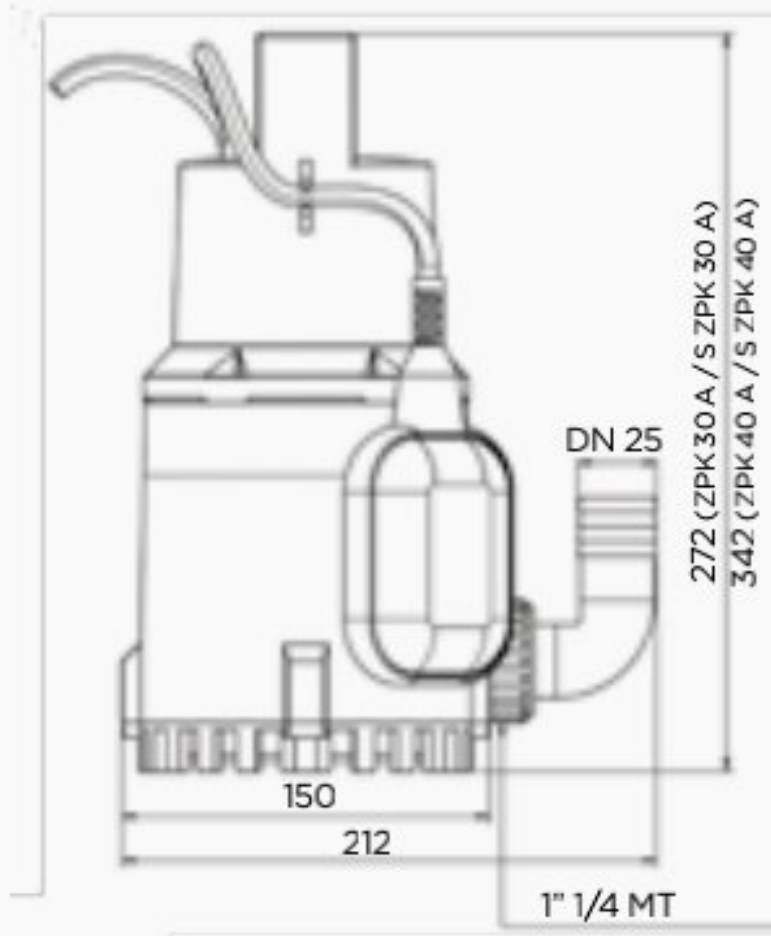


Sanipuddle

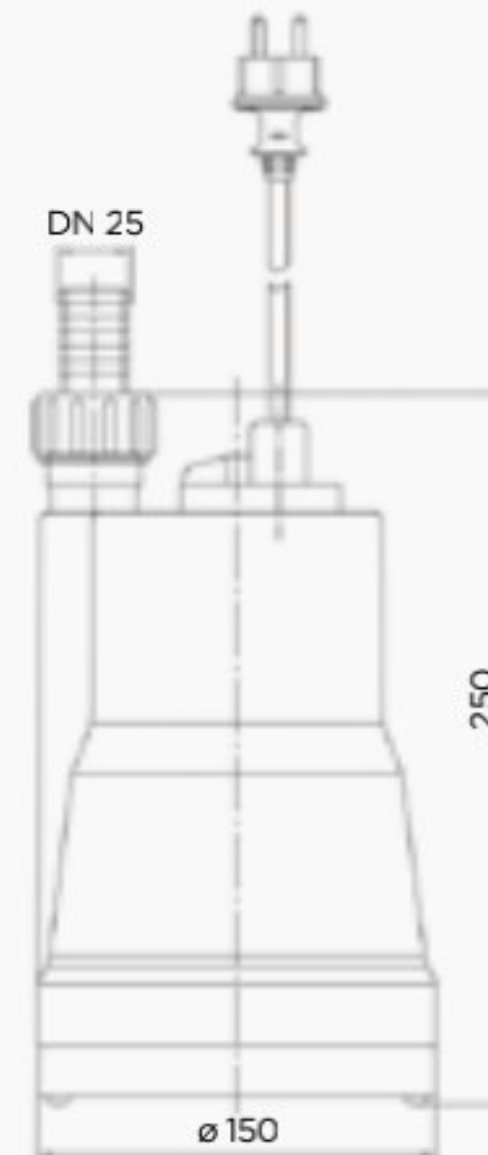


Sanisub 400

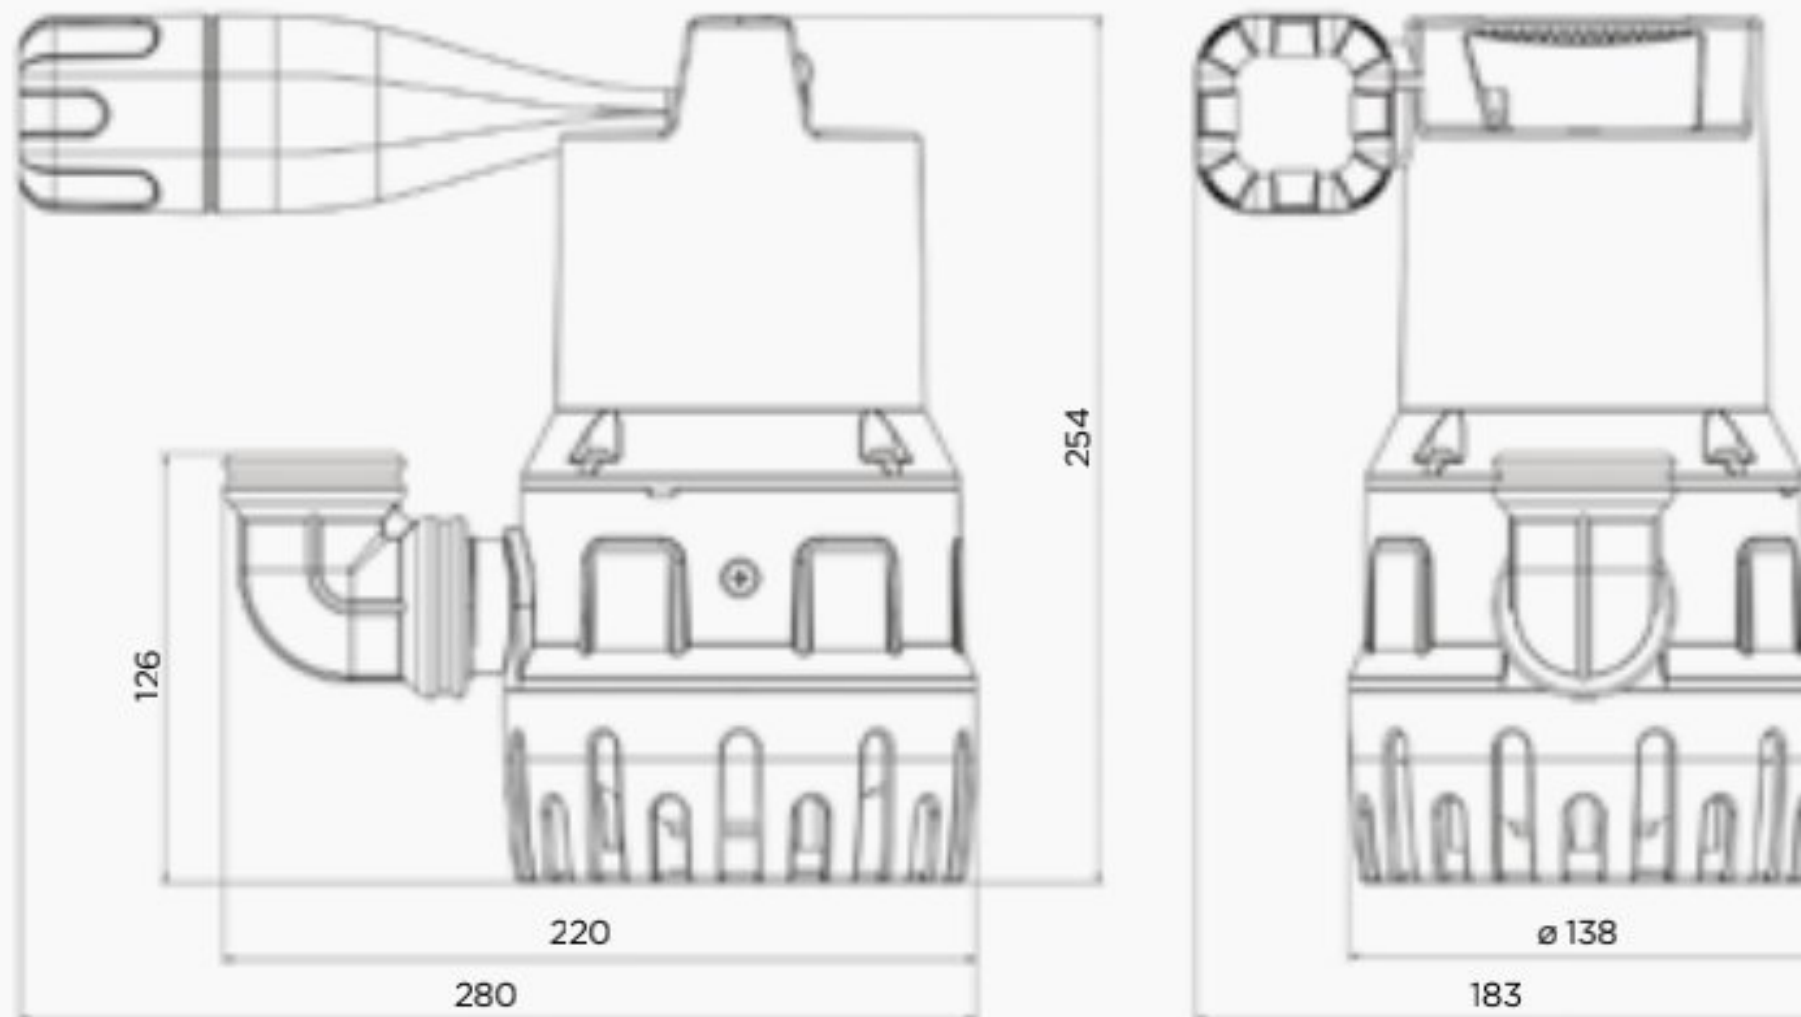

Saniwell

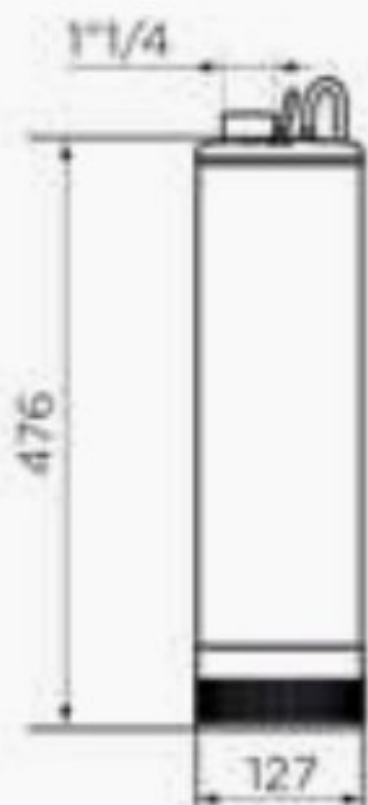

Sanisub Steel AND EMERGENCY KIT

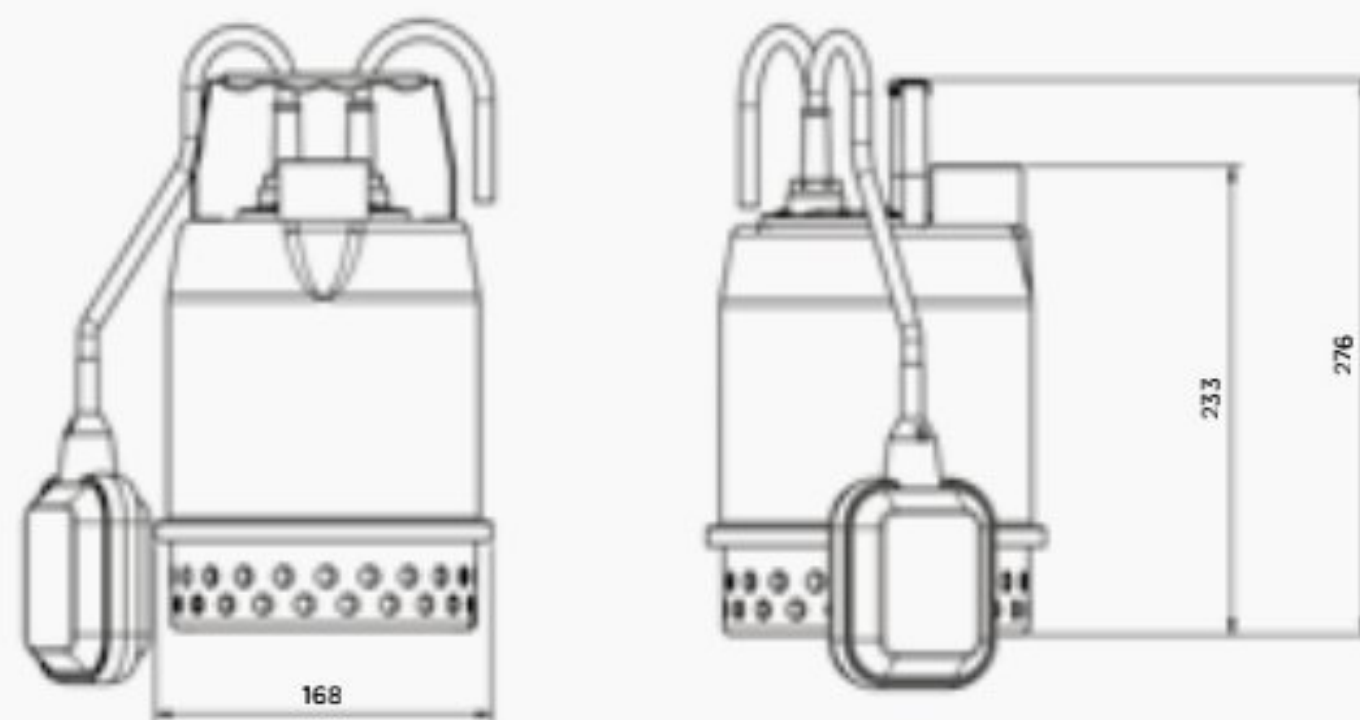

WHY SANICLIM?

Air conditioners generate condensate, which may need to be removed to drain them discreetly.

To meet this need, SFA offers a range of quiet and efficient solutions to remove condensates from air conditioners with a cooling capacity of up to 8 kW.

Ensure that the pump is suitable for your air conditioner:

It is generally accepted that the volume of condensate water to be drained is approximately 0.5 to 0.8 L/hr per kW of cooling capacity (this value can increase sharply in areas with very high humidity). This means that for a 5 kW air conditioner, for example, the volume of condensates to be drained will be 2.5 to 4 L/h.

To carry out a functional installation adapted to your air conditioner, it is important to consider the discharge losses: the suction height, the vertical delivery height and finally the horizontal discharge length.



Condensate pump for air conditioners



Air conditioner

	<p>Sanicondens Clim Mini S Extremely compact design for a completely discreet installation</p>	<p>P.60</p>	<p>•</p>	<p>NEW</p>
	<p>Sanicondens Clim Pack S A compact and complete solution</p>		<p>•</p>	<p>NEW</p>
	<p>Sanicondens Clim Deco Easy access for maintenance</p>	<p>P.61</p>	<p>•</p>	

AIR CONDITIONING PUMPS

- DISCREET INSTALLATION THANKS TO ITS COMPACT SIZE
- A SILENT RANGE FOR QUIET OPERATION
- PUMPING PERFORMANCE: UP TO 6 M
- EASY ASSEMBLY THANKS TO THE FIXING KIT SUPPLIED

APPLICATIONS



Air conditioner

PUMPING

6 m
↑

WARRANTY



References:
Sanicondens
Clim mini S
EAN 3308815083520
CLIMMINI3S

Sanicondens
Clim pack S
white downspout
EAN 3308815083919
CLIMPACK3SBL

AIR CONDITIONING
PUMPS

Sanicondens
Clim mini S



Sanicondens
Clim mini S comes with
an anti-drain vacuum
breaker as standard

Sanicondens
Clim pack S



Sanicondens Clim Mini S Sanicondens Clim Pack S



Security system
(130 °C thermal protector, overflow alarm switch).
Easy control: transparent base.
Anti-drain with vacuum breaker as standard.

Clim pack

Easy assembly (fixing and connection accessories supplied)
Reversible plate (right/left).



Silent: Only 21 dB(A).


Clim mini

A miniature pump with increased compactness for completely discreet installation.

Clim pack

A complete solution for an attractive installation.

OPERATING PRINCIPLE

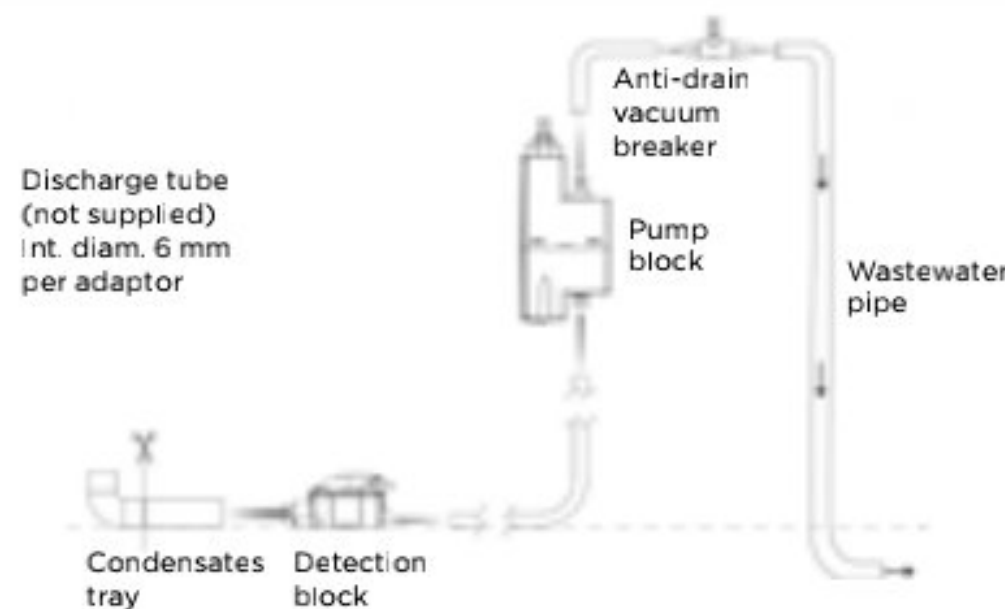



TECHNICAL FEATURES

Noise level	21 dB(A)
Possible connections	Air conditioners up to 8 kW
Ø of the inlet	16 mm
Ø of drainage pipe	6 mm
Maximum flow	9 l/hr +/- 15%
Maximum incoming water temperature	35 °C
Maximum suction (between the detection unit and the pump)	2 m
Voltage	220-240 V
Frequency	50 Hz
Max. absorbed power	22 W
Protection rating (IP)	IP24

PACKING LIST

Pump, detection unit, downspout (only on Sanicondens Clim pack S)
1.2 m flexible pipe, mounting bracket, vent tube, power cable supplied, vacuum breaker

DIMENSIONS - PUMP PERFORMANCE CURVE

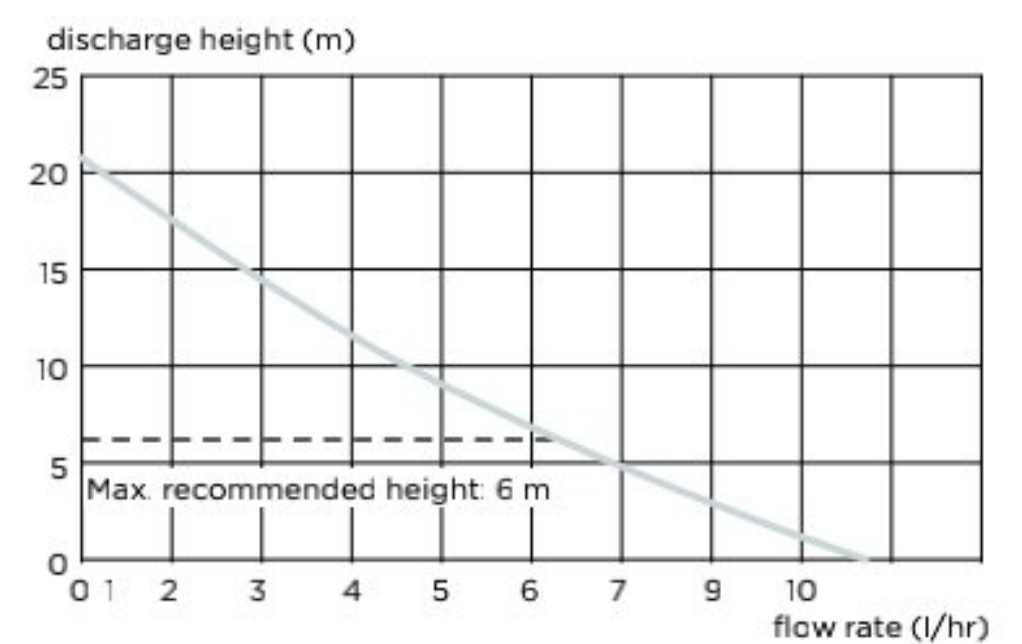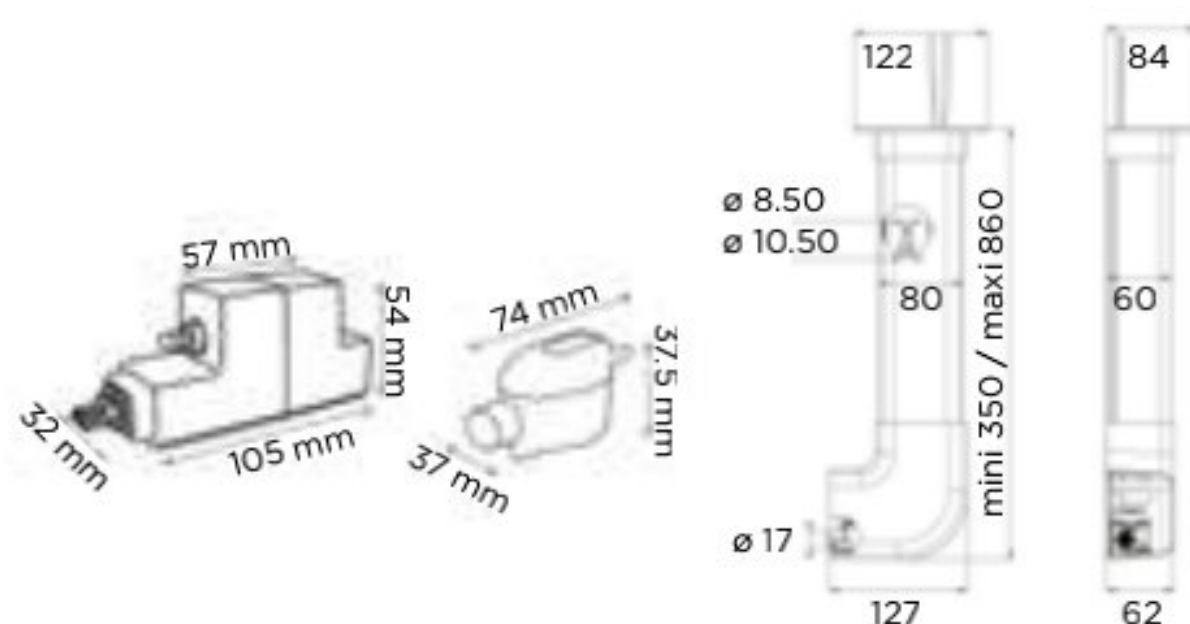



APPLICATIONS



PUMPING



WARRANTY



REFERENCE
EAN 3308815012216
CLIMDECO2

Sanicondens Clim Deco



Simple installation:
delivered with its own fixing kit.
Good accessibility for maintenance.



Attractive curved design.
Compact.
Thermal protector
with automatic reset.



AIR CONDITIONING
PUMPS


SEMI-TRANSPARENT VIEW



TECHNICAL FEATURES

Possible connections	Air conditioners up to 10 kW
Ø of the inlet	22 mm
Ø of drainage pipe	8-10 mm
Tank volume	175 ml
Maximum flow	15 l/hr
Maximum incoming water temperature	35°C
Voltage	220-240 V
Frequency	50 Hz
Max. absorbed power	22 W
Protection rating (IP)	IP24


PUMP PERFORMANCE CURVE

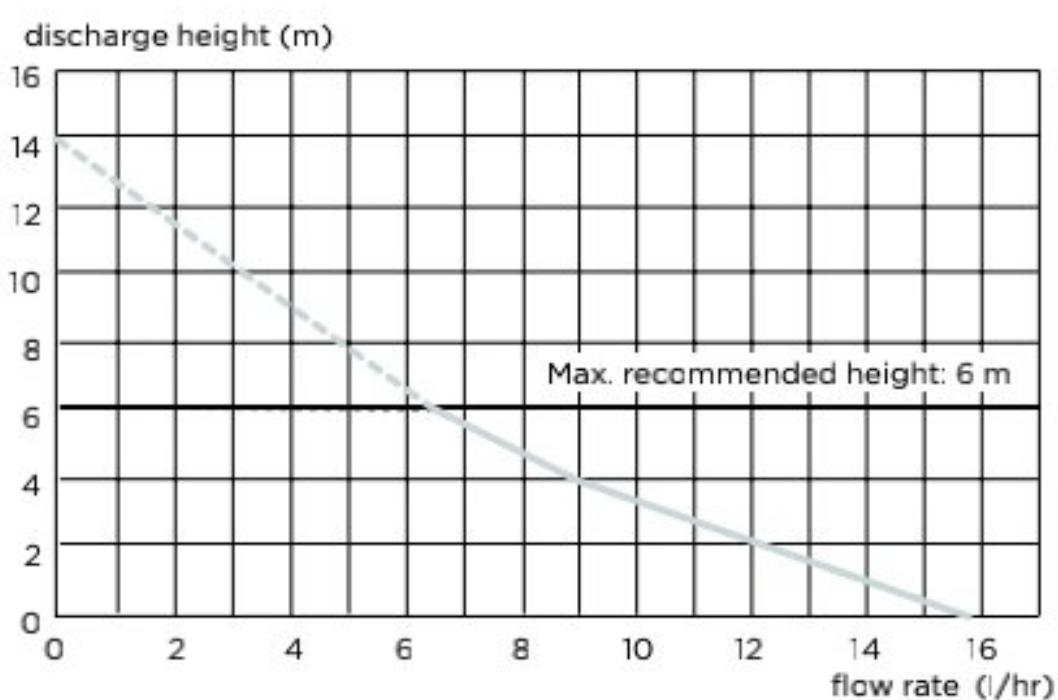

PACKING LIST

Sanicondens Clim deco
Wall mounting and screw cover

DIMENSIONS

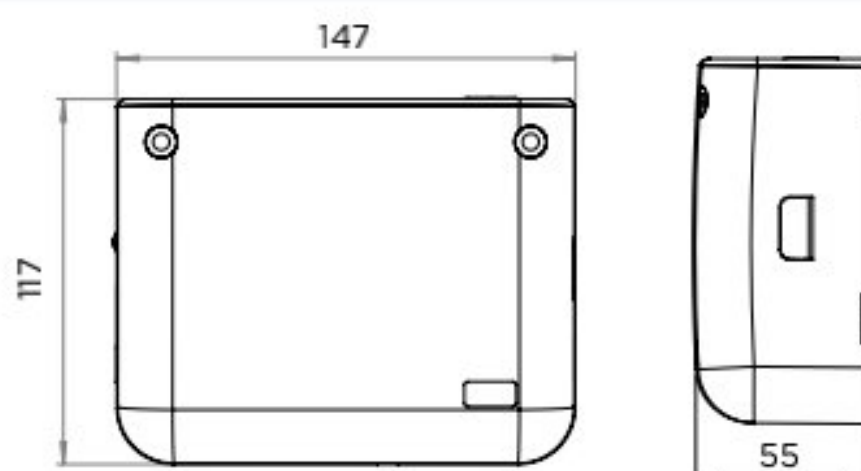

A background image showing a dynamic splash of water with many bubbles and droplets, set against a white background. The water is captured in mid-air, creating a sense of movement and freshness. The splash is more prominent on the right side of the page, where it meets a teal-colored curved graphic element.

WHY SANICONDENS?

Condensate from boilers is not always able to drain through with gravitational flow.

This is why SFA provides a range of condensate evacuation pumps: for gas and oil boilers, for small kitchen boilers as well as for large capacity boilers (up to 80 kW).

According to legislation, condensates emitted by combustion appliances must only flow out via drainage systems resistant to wastewater with a pH value below 6.5.

These pumps are also compatible with heat pumps and thermodynamic flasks

National and local regulations may require pre-treatment of condensates

SFA therefore also offers a whole range of condensate neutralisation systems, either integrated into the pump or not.

Condensate pumps for boilers



GAS boiler



Oil boiler



Air conditioner



Refrigerated display



Dehumidifier



Air conditioning box

		GAS boiler	Oil boiler	Air conditioner	Refrigerated display	Dehumidifier	Air conditioning box	
DISCHARGE PUMPS								
	Sanicondens Deco+ Ideal for boilers installed in kitchens	P.64 MAXIMUM 25 kW						
	Sanicondens Eco For easy pumping	P.65 MAXIMUM 50 kW	MAXIMUM 30 kW (with Sanineutral)	•	•	•	•	NEW
	Sanicondens Pro All accessories as standard and an alarm pre-connection	P.66 MAXIMUM 50 kW	MAXIMUM 30 kW (with Sanineutral)	•	•	•	•	NEW
PUMP WITH NEUTRALISATION SYSTEM								
	Sanicondens Best Flat Low inlet for floor-mounted boiler	P.67 MAXIMUM 80 kW	MAXIMUM 50 kW					
NEUTRALISATION SYSTEMS								
	Sanineutral Mini Ideal for boilers installed in kitchens	P.68 MAXIMUM 25 kW						
	Sanineutral Suitable for wall and floor-mounted boilers	P.69 MAXIMUM 50 kW	MAXIMUM 35 kW					

- COMPACT AND DISCREET INSTALLATION
- SIMPLE INSTALLATION WITH THE FIXING KIT
- SEVERAL INLETS AVAILABLE FOR GREATER FLEXIBILITY OF INSTALLATION

APPLICATIONS



Boiler

PUMPING



WARRANTY



REFERENCE

EAN 3308815075389
SKDECO

BOILER PUMPS



Sanicondens Deco +



Ideal for removing condensates from a kitchen boiler.
Wall mounting supplied as standard.



Optimised design for quietness < 25 dB(A).

Compact.
Design.


SEMI-TRANSPARENT VIEW



TECHNICAL FEATURES

Ø of inlets	22 mm
Number of available inlets	1
Ø of discharge pipe	8-10 mm
Tank volume	175 ml
Maximum flow	10 l/hr
Maximum temperature of incoming water	55°C (S3 15%)
Max. power of the associated gas boiler	25 kW
Voltage	220-240 V
Frequency	50 Hz
Max. absorbed power	22 W
Noise level	< 25 dB(A)
Electrical class	1
Protection rating (IP)	IP24

PUMP PERFORMANCE CURVE

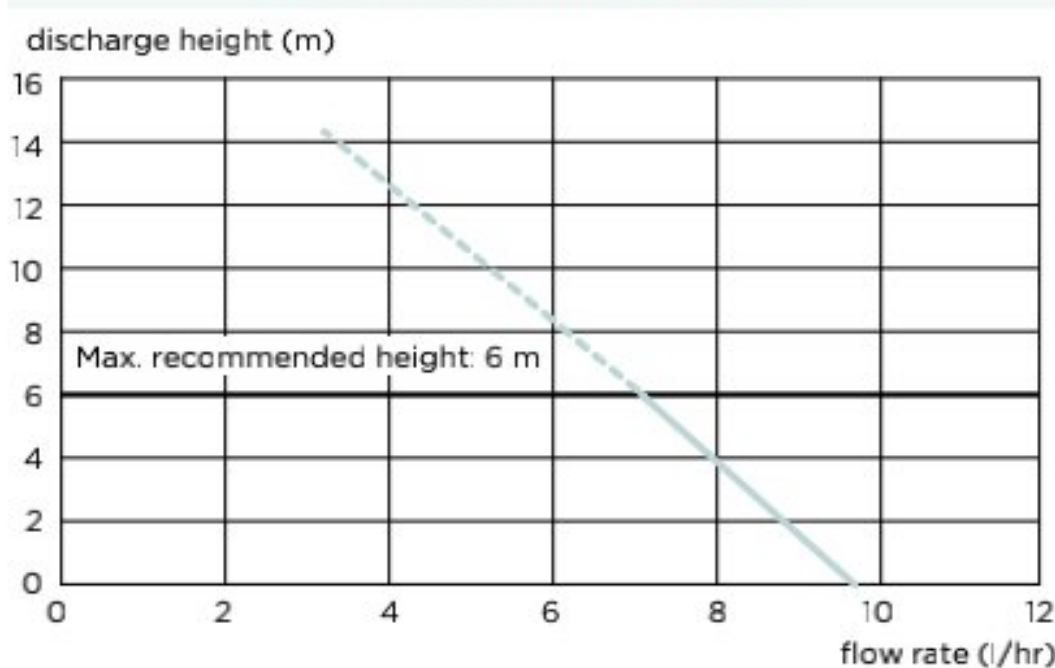

PACKING LIST

- Sanicondens Deco +
- Wall mounting and screw cover

APPLICATIONS



PUMPING



WARRANTY



REFERENCE

EAN 3308815083681
SK6ECO



NEW

Sanicondens Eco



Flexibility: connections possible with gas and oil boilers (using Sanineutral or Sanineutral Mini), floor and wall mounted, refrigerated display cases, air conditioners, air conditioning boxes and dehumidifiers.

Easy installation:
supplied with check valve. Wall or floor fixing.
2 inlets available.



Compact design.
Quiet < 45 dB(A).



BOILER PUMPS

SEMI-TRANSPARENT VIEW




PACKING LIST

Sanicondens Eco

Check valve supplied

Supplied with: fixing screw, 1 inlet adaptor, 1 drainage hose (5 m) and a 1.5 m power cable, 1 outlet adaptor

PUMP PERFORMANCE CURVE

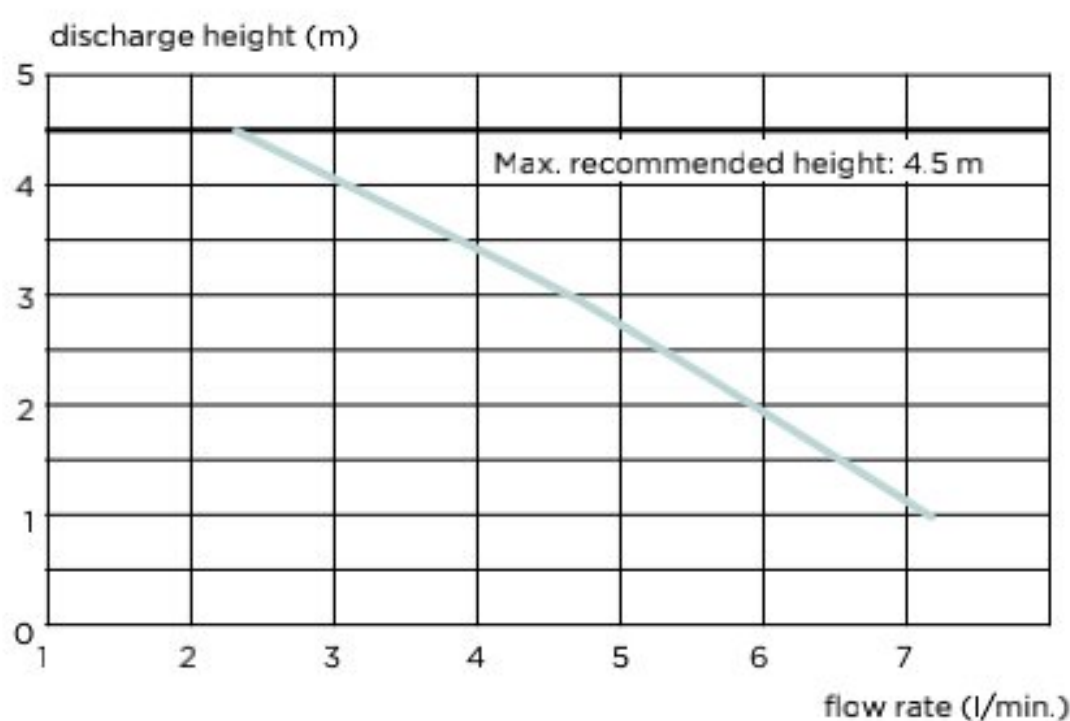

TECHNICAL FEATURES

Ø of inlets	28 mm
Number of available inlets	2
Ø of discharge pipe	10 mm
Tank volume	2.2 l
Maximum flow at 1 m	6.2 l/min
Maximum temperature of incoming water	80°C (S315%)
Max. power of the associated gas boiler	50 kW
Max. power of the associated oil boiler	30 kW
Voltage	220-240 V
Frequency	50 Hz
Max. absorbed power	60 W
Max. absorbed intensity	0.52 A
Electrical class	I
Protection rating (IP)	IP20
Weight	2 kg
Noise level	< 45 dB(A)



APPLICATIONS



Boiler



Air conditioner



Air conditioning box



Back-to-wall sanitaryware



Dehumidifier

PUMPING

4.5 m



WARRANTY



REFERENCE

EAN 3308815083674
SK6

BOILER PUMPS



Sanicondens Pro



Flexibility: connections possible with gas and oil boilers (using Sanineutral or Sanineutral Mini), floor and wall mounted, refrigerated display cases, air conditioners, air conditioning boxes and dehumidifiers.

Easy installation: complete installation kit inlet and outlet adaptors, all power cables and alarm.

Alarm pre-connection.



Compact design.


Quiet < 45 dB(A).



SEMI-TRANSPARENT VIEW



PUMP PERFORMANCE CURVE

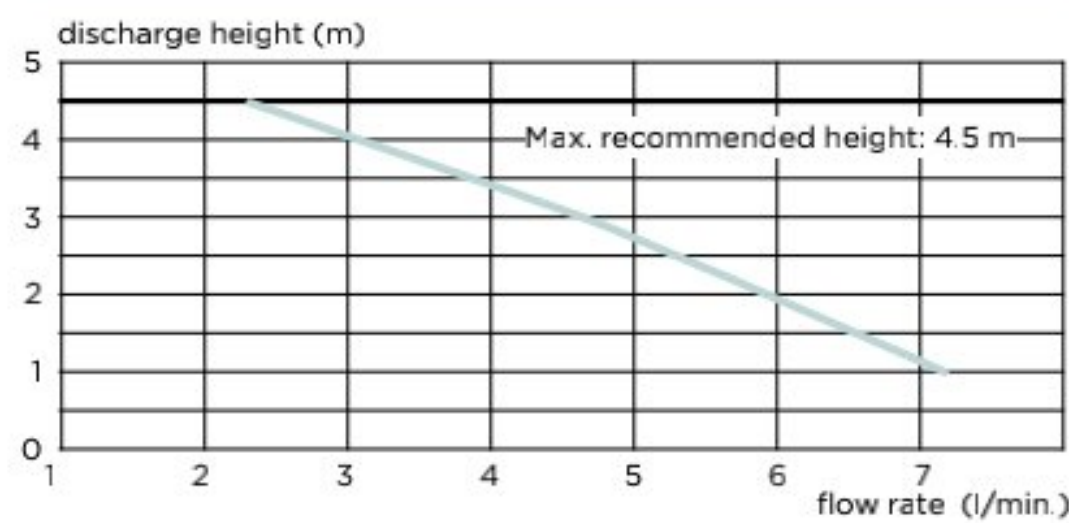

PACKING LIST

Sanicondens Pro

Check valve supplied

Supplied with: fixing screw, 1 inlet adaptor, 1 outlet adaptor (Ø 50 mm), 1 drainage hose (5 m) and a 1.5 m power cable, 1 rubber cap, 1 alarm pre-connection cable

TECHNICAL FEATURES

Ø of inlets	28 mm
Number of available inlets	2
Ø of discharge pipe	10 mm
Tank volume	2.2 l
Maximum flow at 1 m	6.2 l/min
Maximum temperature of incoming water	80°C (S3 15%)
Max. power of the associated gas boiler	50 kW
Max. power of the associated oil boiler	30 kW
Voltage	220-240 V
Frequency	50 Hz
Max. absorbed power	60 W
Max. absorbed intensity	0.52 A
Electrical class	I
Protection rating (IP)	IP24
Weight	2 kg
Noise level	< 45 dB(A)

APPLICATIONS



Boiler



Dehumidifier

PUMPING

4.5 m
50 m

WARRANTY



REFERENCE

EAN 3308815081410
SK6N

Sanicondens Best Flat



Low 47 mm inlet for floor-standing boiler

Easy installation:
Complete installation kit
supplied with check valve.
Integrated neutralisation system.

Alarm pre-connection.



Integrated neutralisation system
to protect the pipes
from acid attacks.


Complete and compact system.

Quiet < 45 dB(A).

SEMI-TRANSPARENT VIEW



PUMP PERFORMANCE CURVE

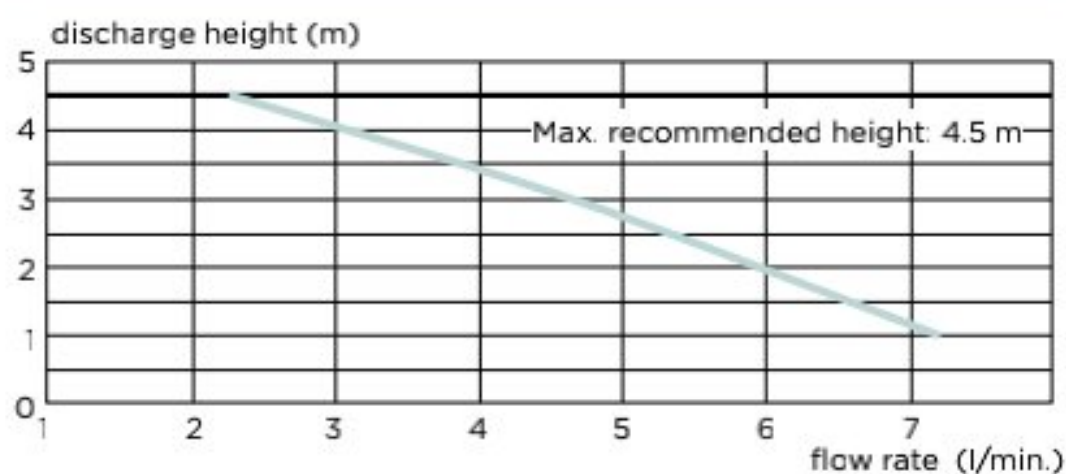

PACKING LIST

Sanicondens Best flat

Wall fixing - Check valve supplied

Delivered with: fixing screw, 1 inlet adapter, 1 outlet adapter (Ø 50 mm), 1 drainage hose, 5 m int. Ø: 10 mm, a 1.5 m power cable, 1 alarm cable, 2 x 1.5 m strands, 1.2 kg neutralisation granules



Optional:
1.2 kg bottle of neutralisation granules

Ref: SACHGRANULEEUR

Reference: EAN 3308815011134



BOILER PUMPS



APPLICATIONS



Boiler

WARRANTY



REFERENCE

EAN 3308815075778
NEUTRALMINISTD



Sanineutral Mini



Easy installation:
supplied with the granules.
Suitable for wall and floor-mounted boilers.
Wall or floor fixing possible.

Easy maintenance:
Removable cover without
having to disconnect the hoses.



Transparent: allows easy inspection
of the granule status.

Protects piping from acid attacks.

Compact design.

BOILER PUMPS



PACKING LIST

Sanineutral Mini with integrated siphon
Fastening yokes
1.2 kg neutralisation granules

TECHNICAL FEATURES

Number of available inlets	2
Top inlet diameter (fitting included)	32/ 40 mm
Side inlet diameter (fitting included)	32 mm
pH min	2.5
Max. power of the associated gas boiler	25 kW

NEUTRALISATION GRANULES



1.2 kg refill bottle of neutralisation granules optional
Ref: SACHGRANULEEUR

The granules neutralise the acidity
of the condensates from boilers.

Replace about once a year.

Reference: EAN 3308815011134





APPLICATIONS



WARRANTY



REFERENCE

EAN 3308815060927
NEUTRALSTD

Sanineutral




Easy installation: supplied with the granules.
Suitable for wall-mounted and floor-standing boilers.
Wall or floor fixing possible.

Easy maintenance:
Removable cover without having to disconnect the hoses.




Transparency: allows easy inspection of the granule status.

Protects piping from acid attacks.

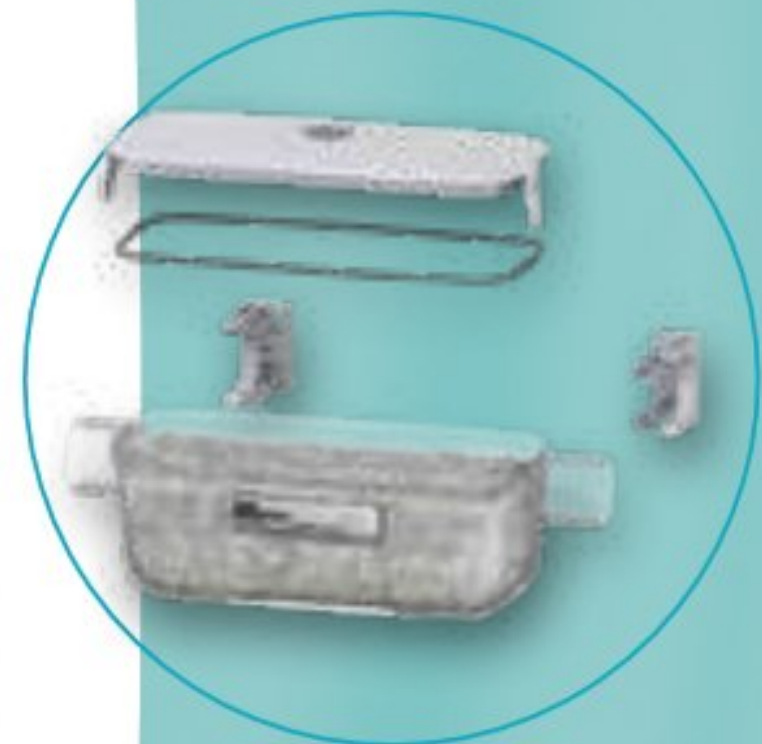

BOILER PUMPS

INSTALLATION DIAGRAM

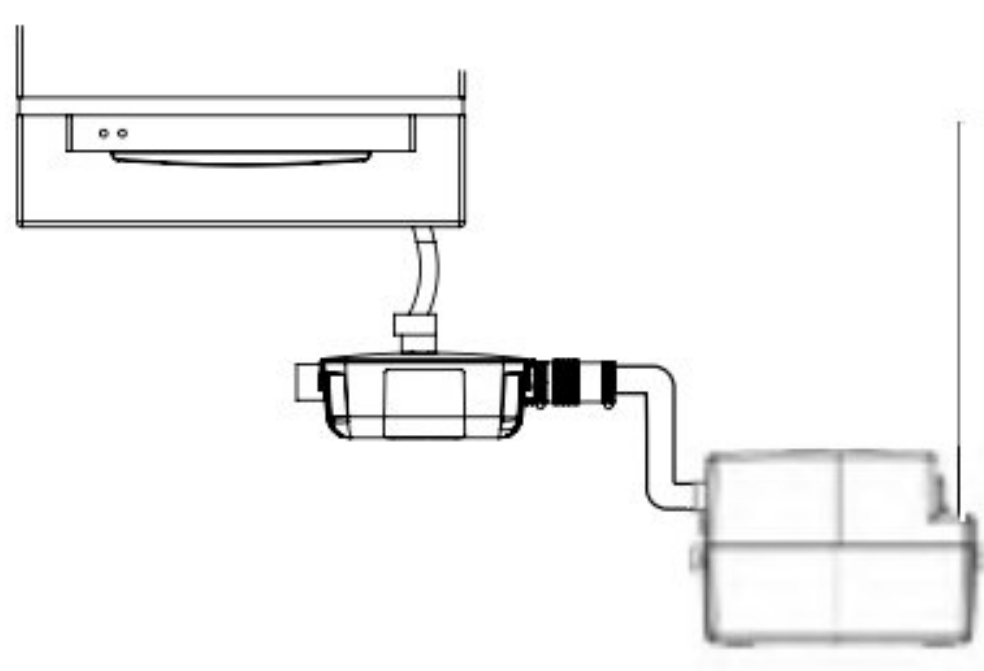

TECHNICAL FEATURES

Number of available inlets	2
Top inlet diameter (fitting included)	40/32/28 mm
Side inlet diameter (fitting included)	40 mm
pH min	2.5
Max. power of the associated gas boiler	50 kW
Max. power of the associated oil boiler	35 kW
Neutralisation granules	1.3 kg

NEUTRALISATION GRANULES



1.2 kg refill bottle of neutralisation granules optional
Ref: SACHGRANULEEUR

The granules neutralise the acidity of the condensates from boilers.

Replace about once a year.


Reference: EAN 3308815011134

PACKING LIST


- Sanineutral with inlet and outlet connections
- Fastening yokes
- Floor fixing system




Sanicondens Deco ⁺

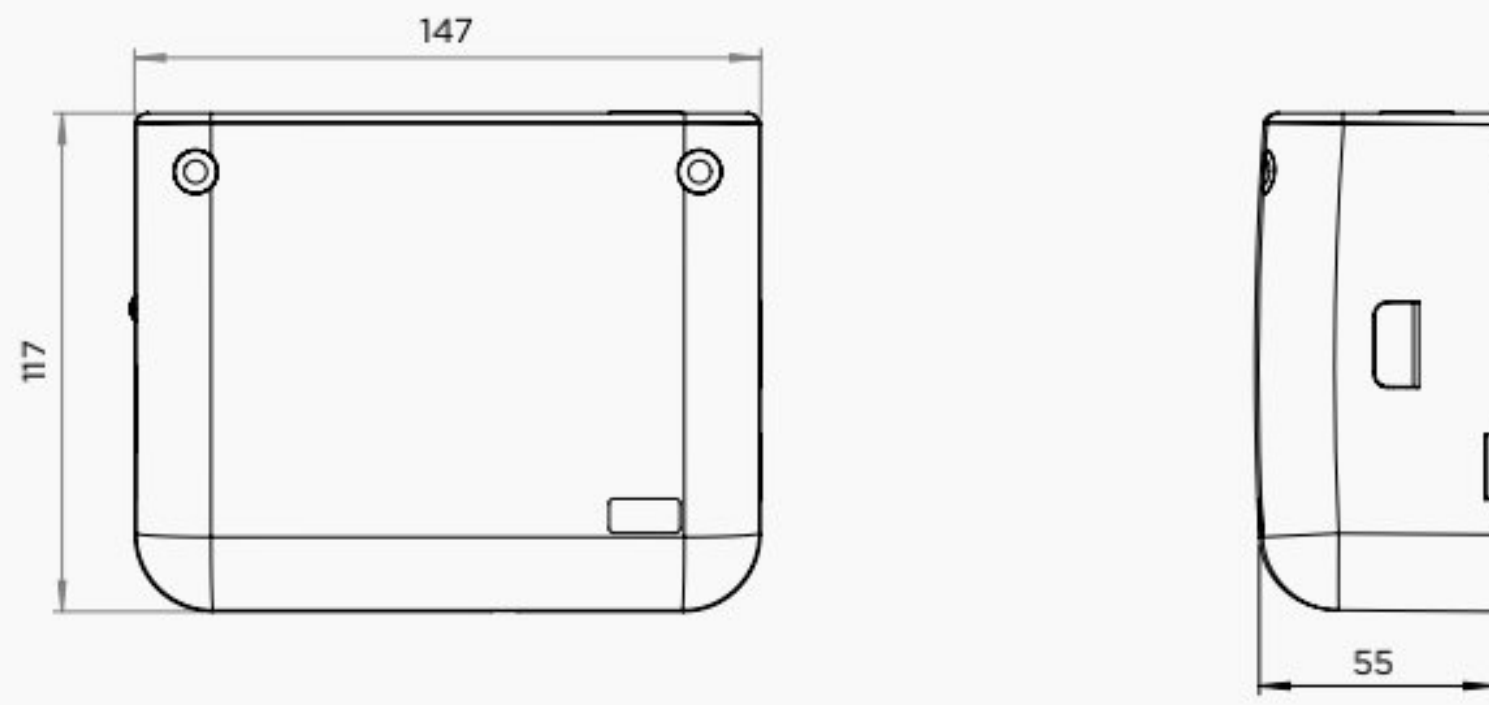



Sanicondens Eco

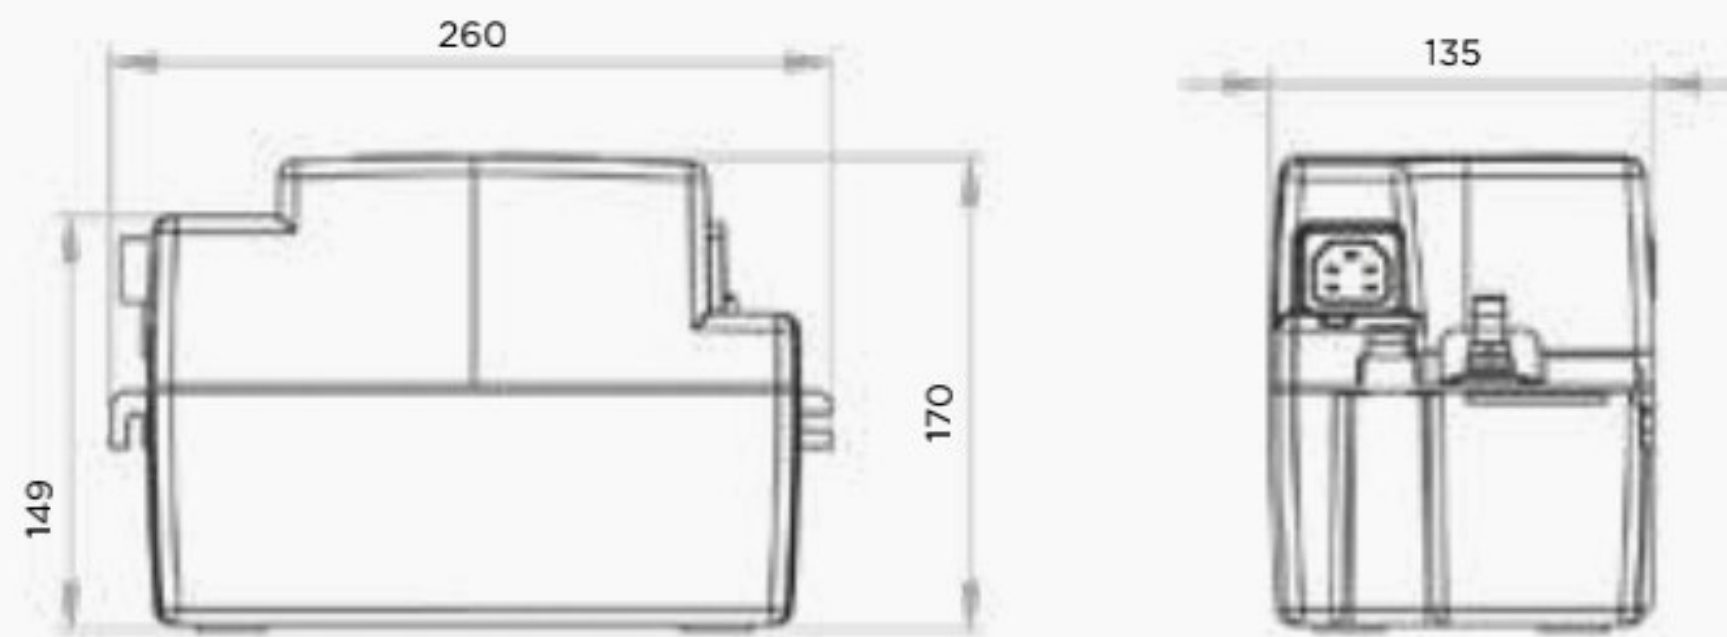



Sanicondens Pro

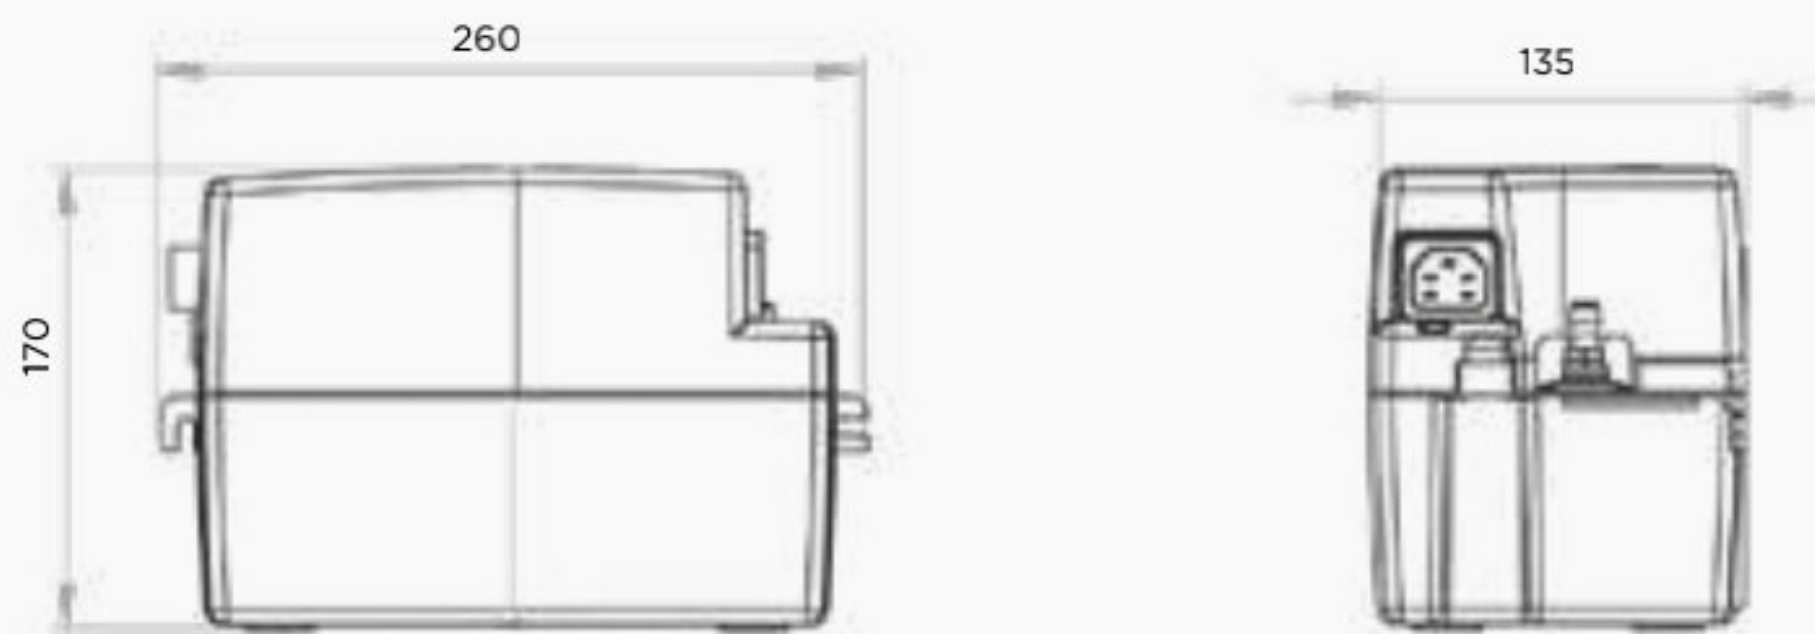



Sanicondens Best Flat

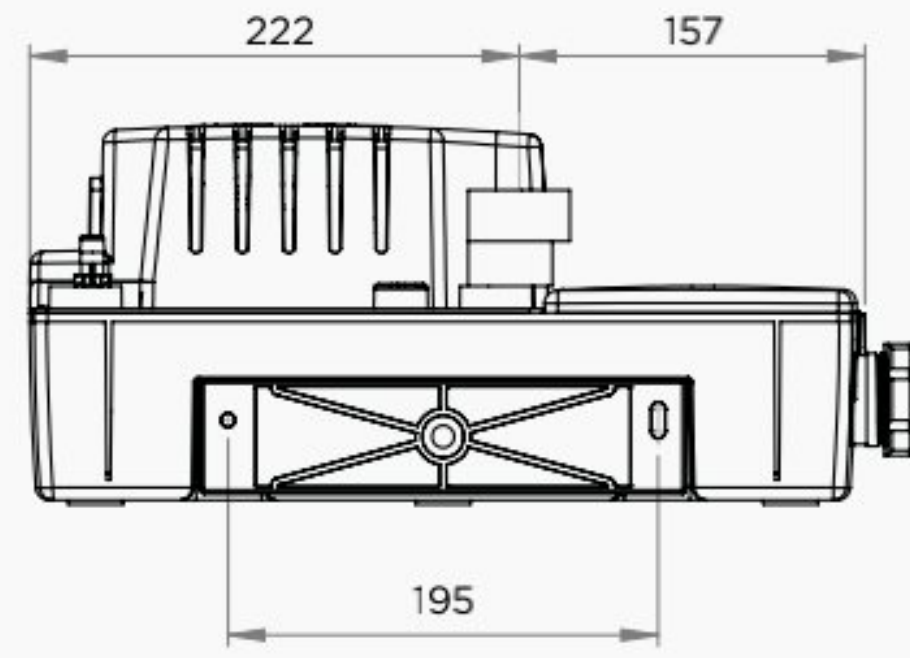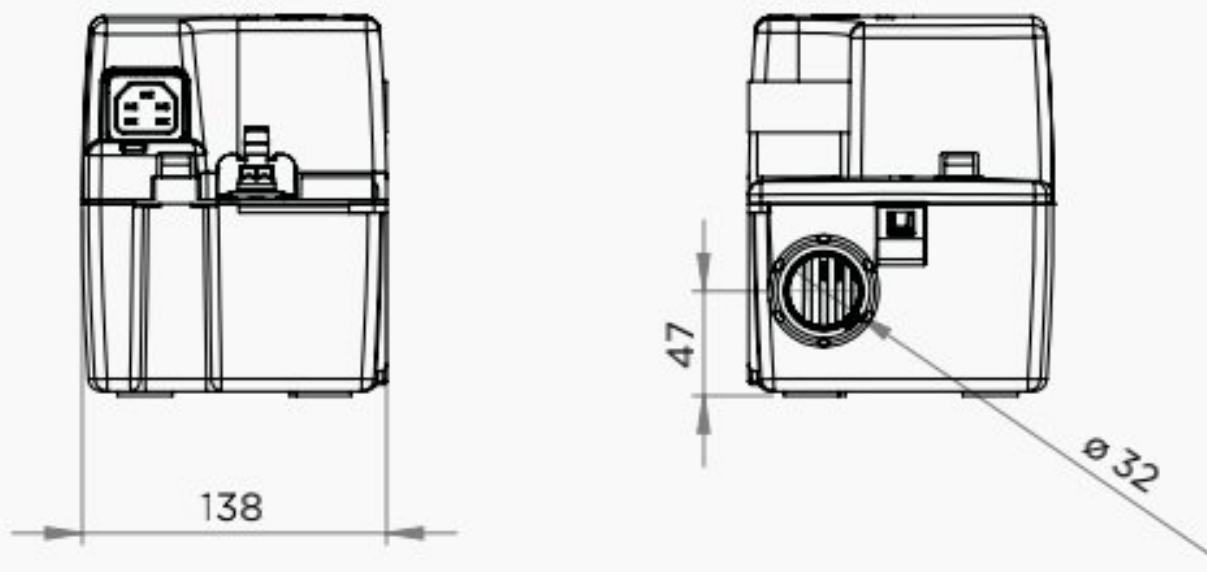

Sanineutral Mini

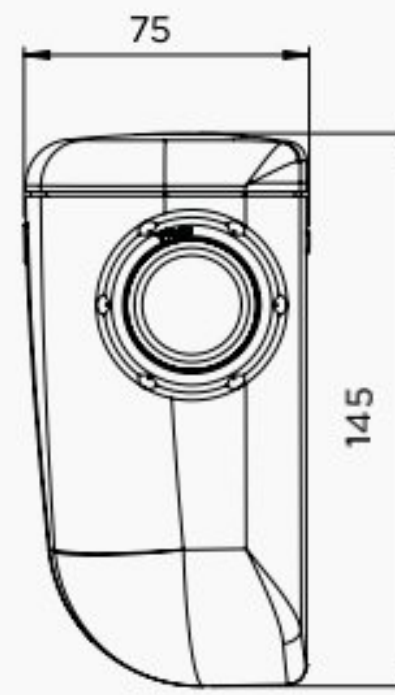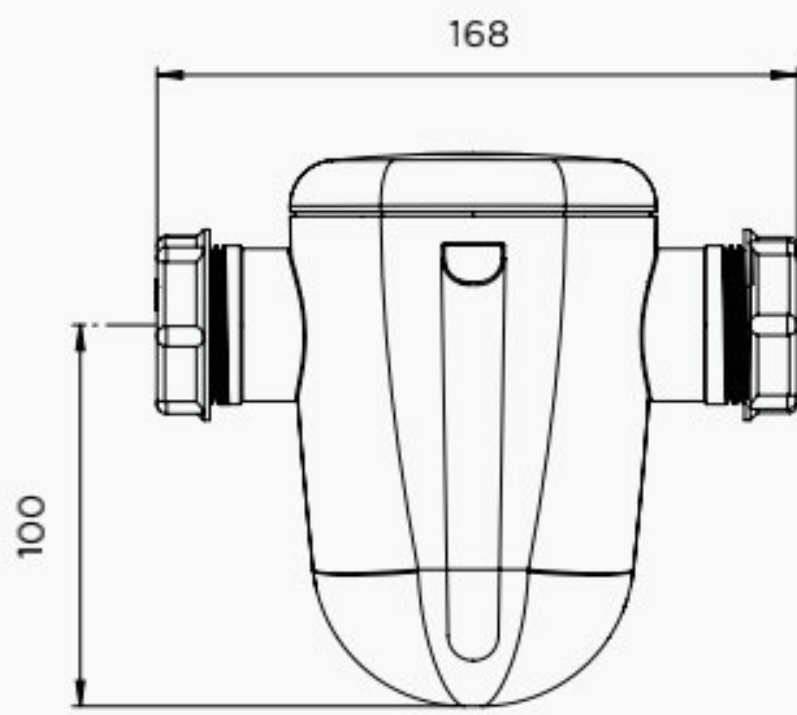

Sanineutral

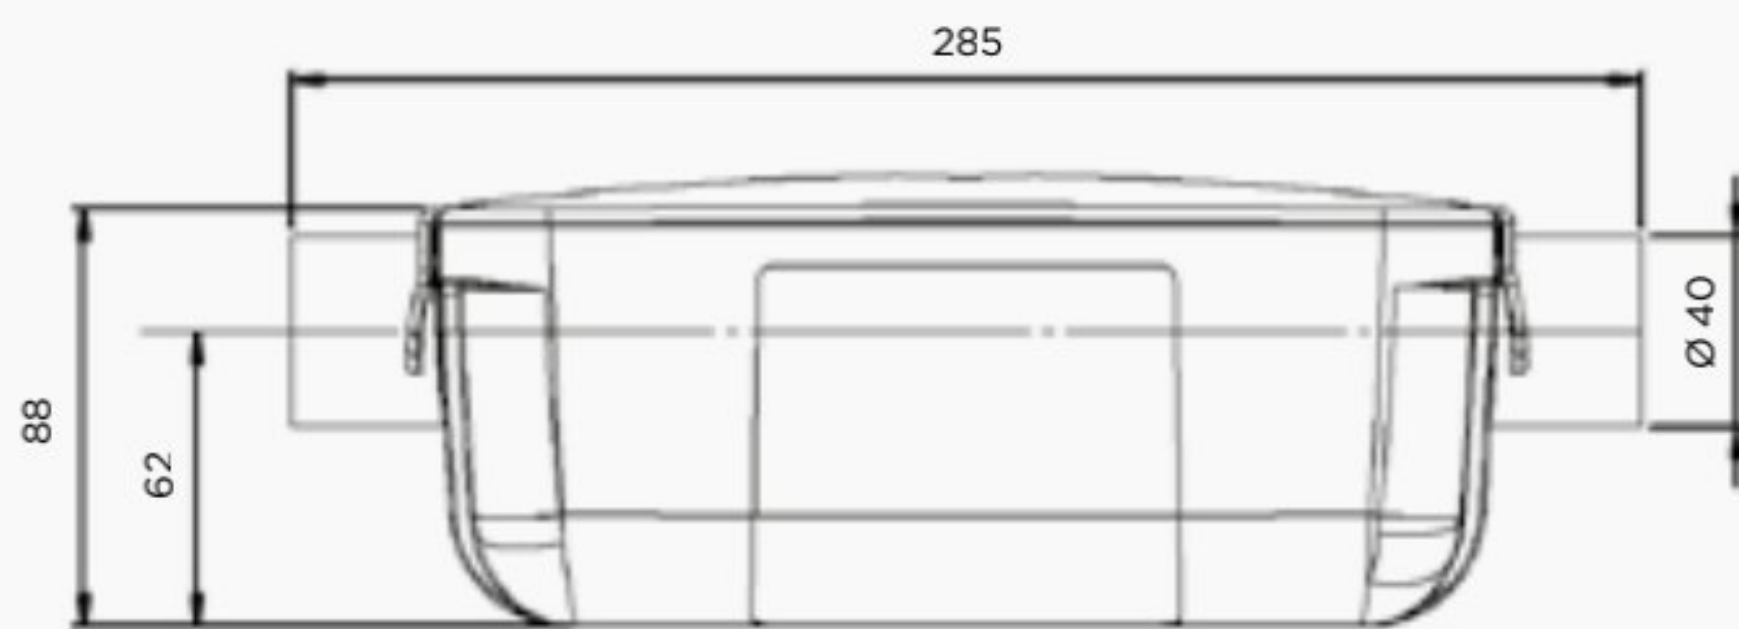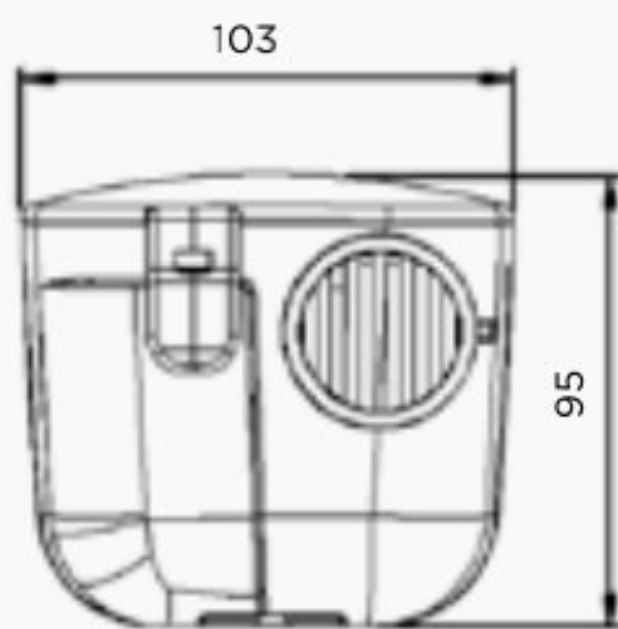

WHY SANIGREASE?

The functions of the grease traps and separators.

Every restaurant produces wastewater full of fatty and oily matter, of animal or vegetable origin. They result in high levels of deposits in pipes. These deposits disrupt the proper functioning of water drainage networks and treatment plants.

By installing a grease separator, macro-waste and greases are retained at the source. Therefore, it avoids any damage to water and public sanitation equipment.

Article L 13 31 10 of the new Public Health Code stipulates that: "Any discharge of wastewater other than domestic, into public sewers, must have been authorised beforehand by the community owning the works that this water will pass through before reaching the natural environment". Sanitation and the departmental health regulations must specify the rules for the management of fatty waste, namely the installation of a pre-treatment system. We are also seeing that more and more cities are imposing this in their municipal by-laws.

Calculation method according to standard NF EN1825-2

For grease separators with a sludge tank, the calculation method according to standard NF EN1825-2 is as follows:





$$NS = \text{No. meals} \times V \text{ meals} \times df \times tf \times fr \times \frac{fq}{(3,600 \times \text{daily operational time})}$$

df: Density factor; tf: Temperature factor; fr: Detergent factor; fq: Peak factor.

To maximise performance, daily maintenance of grease traps is required. For grease separators, monthly maintenance is needed.

Grease traps and separators



	 Commercial	Nominal Size (NS)	Examples of use
 <p>Sanigrease T Grease trap</p> <p>p.74 ✓</p>			<ul style="list-style-type: none"> • Mobile food trucks • Mobile dishwasher • Commercial dishwasher • Occasional food preparation
 <p>Sanigrease T 24 Grease trap available in 4 sizes</p> <p>p.75 ✓</p>			<ul style="list-style-type: none"> • Restaurant, hotel and canteen kitchen sinks
 <p>Sanigrease S Grease separator available in 2 sizes (4 models)</p> <p>p.76 ✓</p>		2 4	<ul style="list-style-type: none"> • Restaurant • Hospital • Professional kitchen • Canteen (without preparation)

- GREASE TRAPS OU GREASE SEPARATOR MODEL
- STAINLESS STEEL OR POLYETHYLENE MODEL
- FULLY-EQUIPPED TANK FOR EASY INSTALLATION (VENTILATION AND DRAINAGE COLUMN OPTIONAL FOR THE SANIGREASE S)
- SEVERAL TANK SIZES FOR ALL YOUR REQUIREMENTS

APPLICATIONS



Commercial

WARRANTY



REFERENCES

Sanigrease T 40
EAN 3308815082547
GREASET-001

Sanigrease T 60
EAN 3308815082554
GREASET-002

Sanigrease T 80
EAN 3308815082561
GREASET-003

Sanigrease T 100
EAN 3308815082578
GREASET-004



Sanigrease T

GREASE TRAP



Compact design.

Guaranteed hygiene thanks to the four feet.

Quick and easy maintenance thanks to drainage valves.

4 adjustable feet for your desired height.

APPLICATIONS

Restaurant kitchen sinks



TECHNICAL FEATURES

Material	Stainless steel
Total volume (L)	39/53/67/82
Ø of inlets	DN 32/50 mm
Ø of drainage pipe	DN 32/50 mm
Weight (kg)	26/29/36/40
Ø total drain valve	DN 25 mm
Ø grease drain valve	DN 25 mm
Total tank	304 L

Cover with seal

Maintenance handle

Removable "peelings" basket

Closure with latches

Booster feet

Connection sleeves

REFERENCE	L	L1	P	P1	H	E	S	FE	DN	NUMBER OF MEALS PER SERVICE	NUMBER OF CONNECTED SINKS
Sanigrease T 40	480	550	350	420	484	385	330	154	32	1 to 40	1
Sanigrease T 60	540	610	350	420	534	435	380	154	32	41 to 60	1 to 2
Sanigrease T 80	640	710	350	420	574	453	400	174	50	61 to 80	1 to 3
Sanigrease T 100	730	800	350	420	594	473	420	174	50	81 to 100	1 to 4



APPLICATIONS



Commercial

WARRANTY



REFERENCE

EAN 3308815082585
GREASET-005

Sanigrease T24

GREASE TRAP



Compact design: for mobile fixtures such as underneath a professional sink.

Mobile use.

Must be frost protected.

Lightweight: only 4 kg.

APPLICATIONS
Food trucks
Mobile dishwashers
Occasional installation requiring a grease trap
Daily maintenance

TECHNICAL FEATURES	
Material	Polyethylene
Total volume (L)	24
Ø of inlets	DN 50 mm
Ø of drainage pipe	DN 50 mm
Volume of sludge trap (L)	8
Weight (kg)	4
Dishwasher full cycle	2 minutes
Minimum rinse time	1.5 minutes
Changeover time	1/2 minute
Water consumption for rinse	5 L

Optional drain valve available



Optional Sanigrease drain valve

Ref: HYDRO-00054

Reference: EAN 3308815082646

APPLICATIONS



Commercial

WARRANTY



REFERENCES

Sanigrease S 680
EAN 3308815082592
GREASES-001

Sanigrease S 1600
EAN 3308815082608
GREASES-002

Sanigrease S 680C
EAN 3308815082615
GREASES-003

Sanigrease S 1600C
EAN 3308815082622
GREASES-004



Sanigrease S

GREASE SEPARATOR



Easy installation through an existing door:
77.3 cm wide.

Available with vent and drainage column.

Optional alarm.

APPLICATIONS

Shared kitchens



With sludge tank

Polyethylene tank made by rotational moulding

FEATURES

Material	Polyethylene
Total volume (L)	680 / 1,600
Ø of inlets	DN 110 mm
Ø of drainage pipe	DN 110 mm
Weight (kg)	64 / 71 / 116 / 123
Ø drain valve	DN 80 mm
Ø ventilation	DN 110 mm
Cable pass (for alarm)	DN 50 mm
Volume of sludge trap (L)	200 / 400
Volume of separator compartment (L)	480 / 1,200
Nominal Size (NS)	2 (S 680) 4 (S 1600)

Cover on watertight seal, locked by screws

Stainless steel alarm fixing hook as standard in the tank


NS 2 (S 680)
NS 4 (S 1600)

GREASE TRAPS AND SEPARATORS

RESTAURANT NUMBER OF MEALS			HOSPITAL	PROFESSIONAL KITCHEN ESTABLISHMENT	CANTEEN (WITHOUT PREPARATION)	DRAINAGE COLUMN	
1 SERVICE	2 SERVICES	HOTEL RESTAURANT	NUMBER OF MEALS PER DAY			WITHOUT	WITH
≤ 104	≤ 209	≤ 177	≤ 295	≤ 201	≤ 443	Sanigrease S 680	Sanigrease S 680C
≤ 209	≤ 417	≤ 354	≤ 591	≤ 403	≤ 886	Sanigrease S 1600	Sanigrease S 1600C


Sanigrease T

GREASE TRAP

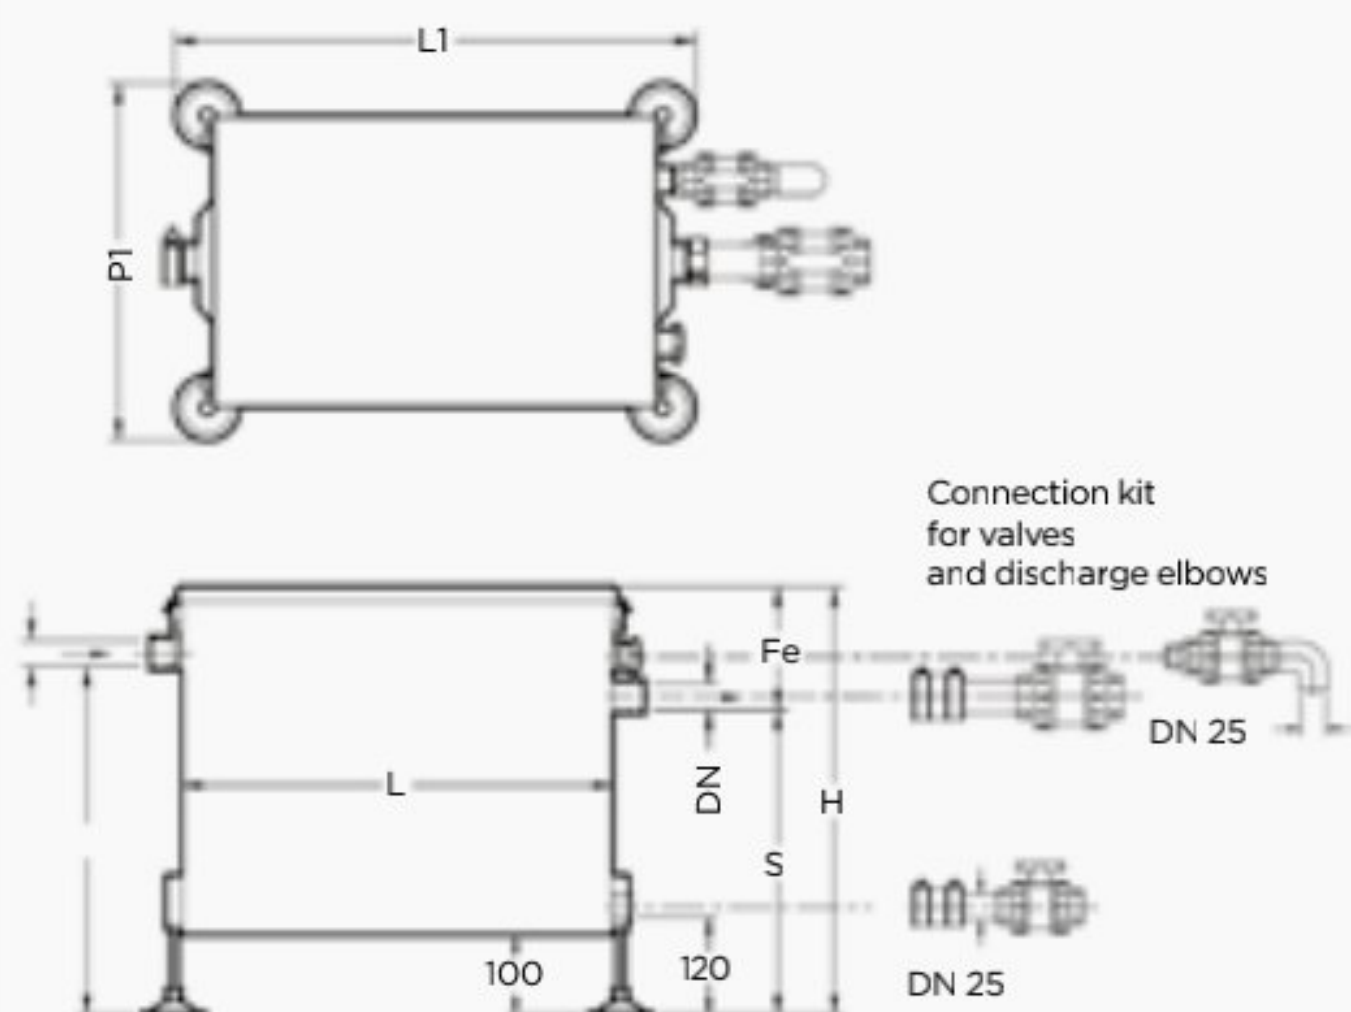


Sanigrease T24

GREASE TRAP

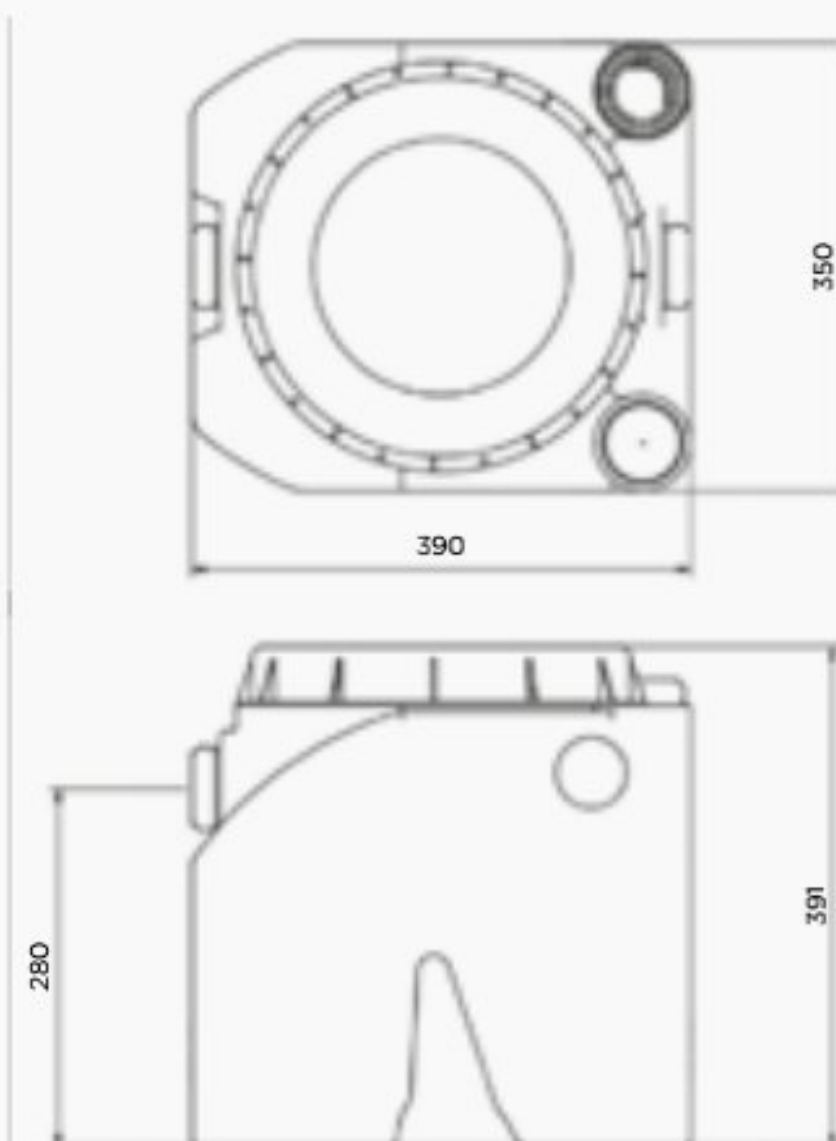


Sanigrease S


GREASE SEPARATOR

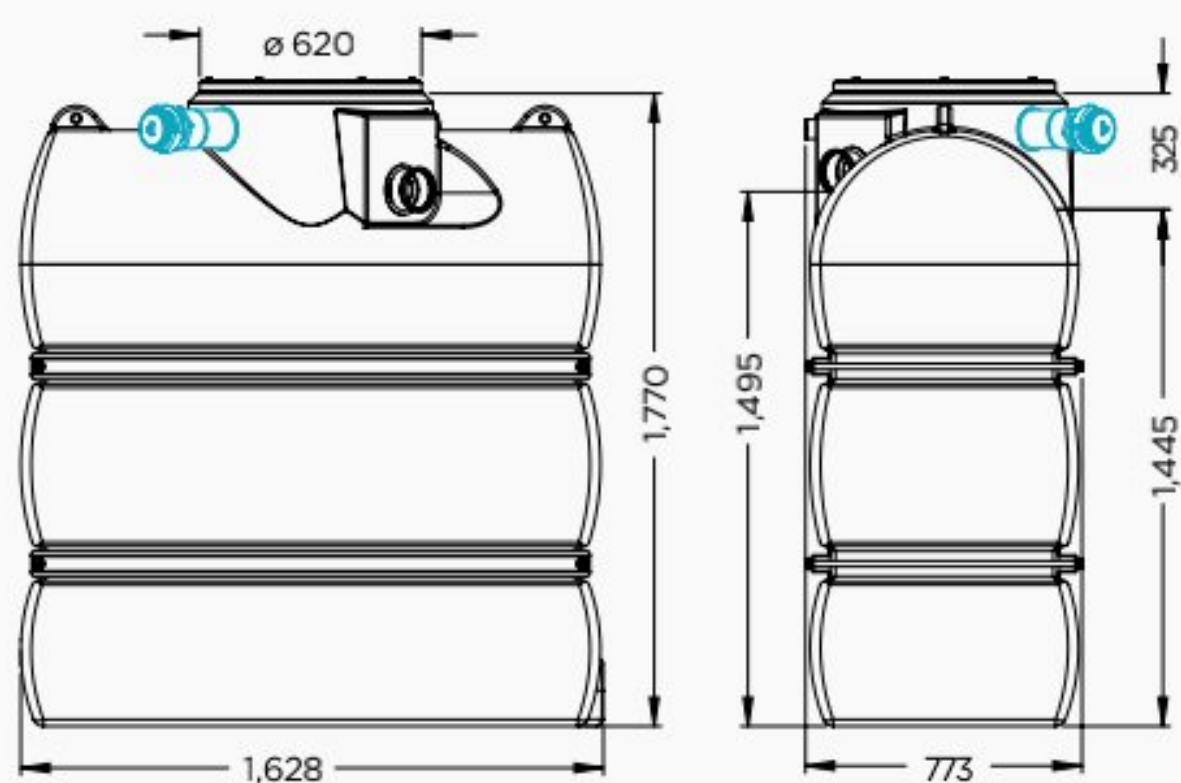

Sanigrease S 1,600
Sanigrease S 1 600C

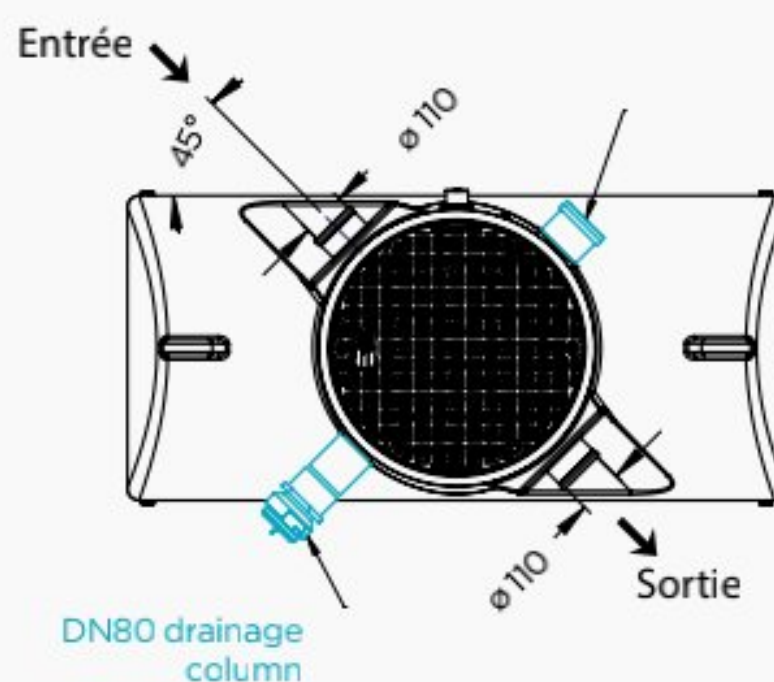

Sanigrease S 680
Sanigrease S 680C
Sanigrease S 1,600
Sanigrease S 1 600C

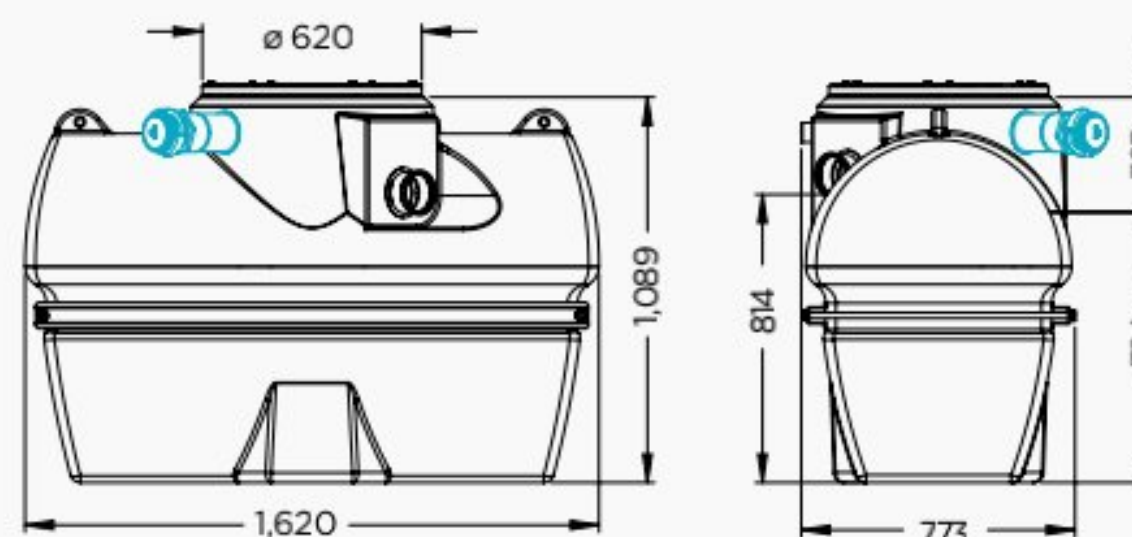

Sanigrease S 680
Sanigrease S 680C

ACCESSORY

DESCRIPTION	EAN	FACTORY CODE
230 V grease alarm sensor + box	3 308 815 082 653	HYDRO-00056




230 V GREASE ALARM
SENSOR + BOX

1 DETERMINE THE PEAK FLOW

This is the amount of water to be drained according to the type and number of sanitary fixtures connected to the pumping station.

The flow measures a volume per unit of time. It is expressed in cubic metres per hour (m³/hr) or litres per second (L/s).

ESTIMATED FLOW



On the basis of 1 residence comprising: 1 toilet, 1 bath, 1 shower, 1 washbasin, 1 sink, 1 washing machine, 1 dishwasher

Number of residences	Flow
1 residence (1 to 3 inhabitants)	2.5 m³/hr
Up to 2 residences (4 to 6 inhabitants)	5 m³/hr
Up to 4 residences (7 to 9 inhabitants)	10 m³/hr
Up to 6 residences (10 to 12 inhabitants)	15 m³/hr

2 CALCULATING THE TOTAL DYNAMIC HEAD (TDH)

TDH IS THE PRESSURE THAT THE PUMP MUST PROVIDE BETWEEN THE SUCTION POINT AND THE DISCHARGE POINT.

TDH = GEO H + H v

Geo H = Geometric height

This is the height of the discharge in metres.

H v = Total discharge losses in the discharge pipe (expressed in metres of water column).

There are 2 types of friction loss:

- regular (or linear) friction loss: these result from the friction of the fluid against the walls of the discharge pipe
- the singular discharge losses by friction: they come from accidents related to pipes (elbow, check valves, etc.)

These have to be added to the geometric height to determine the total dynamic head.

The value obtained in this table must be multiplied by the total length of the drainage pipe to obtain the total loss of loads.

TABLE OF DISCHARGE LOSSES

Flow in m ³ /hr	DN PN10 pressure PVC piping					
	DN 32 36.2/40	DN 40 45.2/50	DN 50 57/63	DN65 67.8/75	DN 80 81.4/90	DN 100 101.6/110
2	0.011					
3	0.022	0.008				
4	0.037	0.013				
5	0.054	0.019	0.006			
6	0.075	0.026	0.009			
7	0.099	0.034	0.011			
8	0.126	0.043	0.014	0.006		
9		0.054	0.018	0.008		
10		0.065	0.021	0.009		
12		0.090	0.029	0.013	0.005	
15			0.044	0.019	0.008	
20				0.032	0.013	0.005
25				0.048	0.020	0.007
30					0.028	0.010
40						0.016
50						0.024
60						0.033
70						0.044
80						0.056

HELP WITH CHOOSING THE LIFTING STATION

Once the total dynamic head and the peak flow have been determined, the pump's typical curve can determine its suitability for requirements.

The volume of the tank will then be determined in accordance with the specific constraints of each installation.

CASE STUDY

2 residences are connected to one lifting station. The station must discharge wastewater at a height of 4 m over a total pipe length of 10 m in PVC with an diameter exterior of 50 mm.

- **Geometric height:** 4 m.
- **Table of discharge losses:** for 2 residences, we estimate the flow at peak times to be 5 m³/hr.

According to the discharge losses table, the height is: $0.019 \times 10 = 0.19$ m

→ **Therefore, the total dynamic head will be: 4 m + 0.19 m = 4.19 m**

→ The project therefore presents the following criteria:
TDH = 4.19 m and Flow = 5 m³/hr

- **Our client wants to install an underground pumping station in his garden.**

The Sanifos range corresponds to his needs. His installation constraints dictate a 280 litre tank.

Analysis of the pump performance curve for the Sanifos station confirms to us that the Sanifos 280 station meets the needs of the installation.

HYDRAULICS




VORTEX WHEEL GRINDER WHEEL MULTI-CHANNEL WHEEL TWO-CHANNEL WHEEL

NEW

The pump is the main element of the lifting station. It is expected to reliably pump away wastewater from an installation.

SFA is always innovating to continuously improve the performance of their pumps.

Their reliability and safety are guaranteed thanks to the multitude of tests carried out in our factories during the design process: two 100% electrical tests, a 100% leakage test and a functional test.

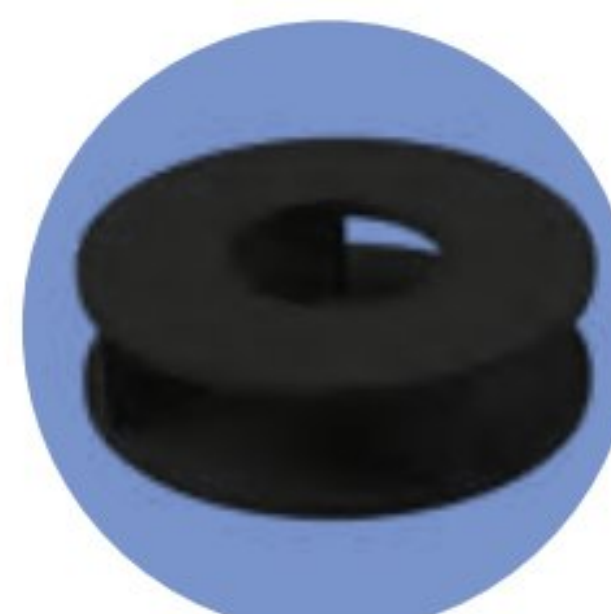

NEW

KX V6 VORTEX WHEEL

Sanicubic 1 VX
Sanicubic 2 VX
Sanifos 280/610/1300
Sanipump VX

GRINDER WHEEL PRO X K2

Sanicubic 1/1 WP
Sanicubic 2 Classic
Sanicubic 2 Pro
Sanifos 110 / 280/610/1300
Sanipump GR

MULTI-CHANNEL WHEEL

Sanicom 1
Sanicom 2

TWO-CHANNEL WHEEL

Sanifos 610
Sanipump SLD 700

Floor-standing lifting stations

WHY SANICUBIC?

Since it is not always possible to install an underground lifting station, SFA offers the Sanicom and Sanicubic ranges!

These are pumping stations that can simply be placed on the ground for easy installation and maintenance.

Sanicom is for pumping grey water, while Sanicubic pumps both grey water and black water.

		 Individual	 Commercial	 Collective	Examples of use
	Sanicom 1 Grey water	p.82 ✓	✓		<ul style="list-style-type: none"> • Bakeries, laboratories, smoothie bars: pumping for sinks, bars, dishwashers, glass washers • Hair salons: pumping for hair disposal trays in hair salons • Gymnasiums, restaurants, dental and veterinary practices: water pumping from sanitary facilities with sinks, showers and urinals • Bread oven: high temperature condensates drainage • Boiler room and softeners: grey water drainage • Production water drainage
	Sanicom 2 Grey water	p.83 ✓	✓		
	Sanicubic 1 Wastewater	p.84 ✓			<ul style="list-style-type: none"> • Entire detached house: wastewater drainage • House extension or pool house design: wastewater drainage • Factory extension (design of sanitary fittings, toilet, sinks and urinals): wastewater drainage • Site base camp, cultural events: wastewater drainage • River developments, floating chalets, barges: wastewater drainage
	Sanicubic 1 WP Wastewater	✓			
	Sanicubic 2 Classic Wastewater	p.86	✓		
	Sanicubic 2 Pro Wastewater		✓		
	Sanicubic 1 GR Wastewater	p.88	✓		
	Sanicubic 2 GR Wastewater	p.90	✓		
	Sanicubic 1 VX Wastewater	p.92 ✓	✓		
	Sanicubic 2 VX Wastewater	p.94	✓	✓	
	Sanicubic 1 SC Wastewater	p.96	✓	✓	
	Sanicubic 2 SC Wastewater	p.98	✓	✓	

- HIGH PERFORMANCE OPERATION WITH THE SFA GRINDER (EXCEPT SANICUBIC 1 VX, SANICUBIC 2 VX AND SANICOM)
- EASILY REMOVABLE MOTOR(S) AND LEVEL SENSOR(S)
- CONTROL UNIT SUPPLIED AS STANDARD (EXCEPT SANICUBIC 1 AND SANICOM 1)
- SECURE OPERATION WITH THE AUDIBLE AND VISUAL ALARM BOX
- LOW INLETS

APPLICATIONS



Individual Commercial

DISCHARGE

11 m



WARRANTY



REFERENCE

EAN 3308815082851
COM1002



Sanicom 1



Pumping stations for grey water.
Simple and easy installation without soil disbursement.
Inlets on each side of the device for greater flexibility (ext. diameter 40).
Removable motor and level sensors for ease of maintenance.



Compact design.
Ability to pump grey water (except toilets) up to 90°C.
Forced motor start possible.




Wired audible and visual alarm unit
5 m cable (optional)
EAN 330881583384
BOITALARMCOM1002

SEMI-TRANSPARENT VIEW



PUMP PERFORMANCE CURVE

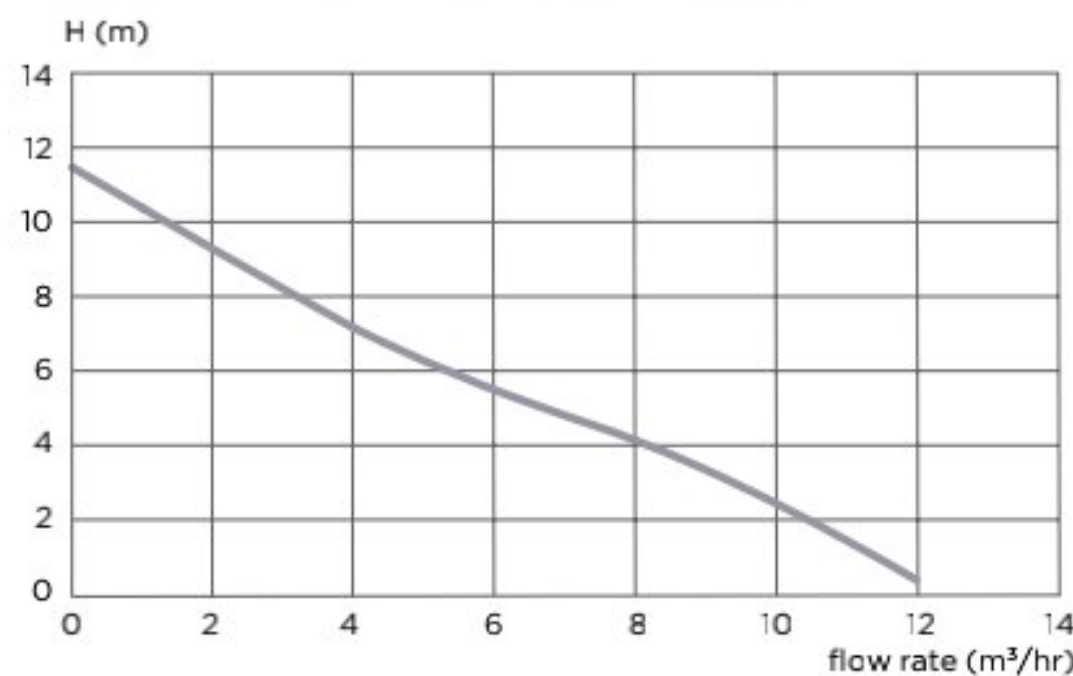

TECHNICAL FEATURES

TANK	
Tank volume	14 L
Ø of ext. inlets	2x 40 mm
Discharge diameter ext.	32 mm
Ventilation diameter	50 mm
ON/OFF level	135 mm / 50 mm
Shower tray height	25 cm minimum
Maximum temperature of incoming wastewater	90°C intermittently (max. 5 min)
Possible connections	Grey water from bathroom (without toilet), kitchen, laundry
Wheel type	Multi-channel
PERFORMANCE	
Solid handling capacity	8 mm
Voltage	220-240 V/50 Hz
Power rating	750 W
Max. absorbed intensity	3.3 A
Weight (including accessories)	10 kg
Protection rating (IP)	IPX4
Electrical class	I

PERFORMANCE

Max. flow	12 m³/hr
Max. height (Q = 0 m³/hr)	11 m
Max. recommended height	8 m

PACKING LIST

- 1-pump lifting station
- Built-in check valve





Sanicom 2



Pumping stations for grey water.
 Easy installation without soil disbursement.
 2 low side inlets Ø ext. 80
 (connections possible in Ø ext. 50 or
 Ø ext. 40).
 Removable motors and level sensors
 for ease of maintenance.



Compact design.
 Ability to pump grey water up to 90°C.
 Supplied with remote control unit:
 2 alternating pumps for more intensive use.
 Easy access and maintenance.

APPLICATIONS



DISCHARGE

15 m

WARRANTY




REFERENCE


EAN 3308815082868
 COM2002



SEMI-TRANSPARENT VIEW

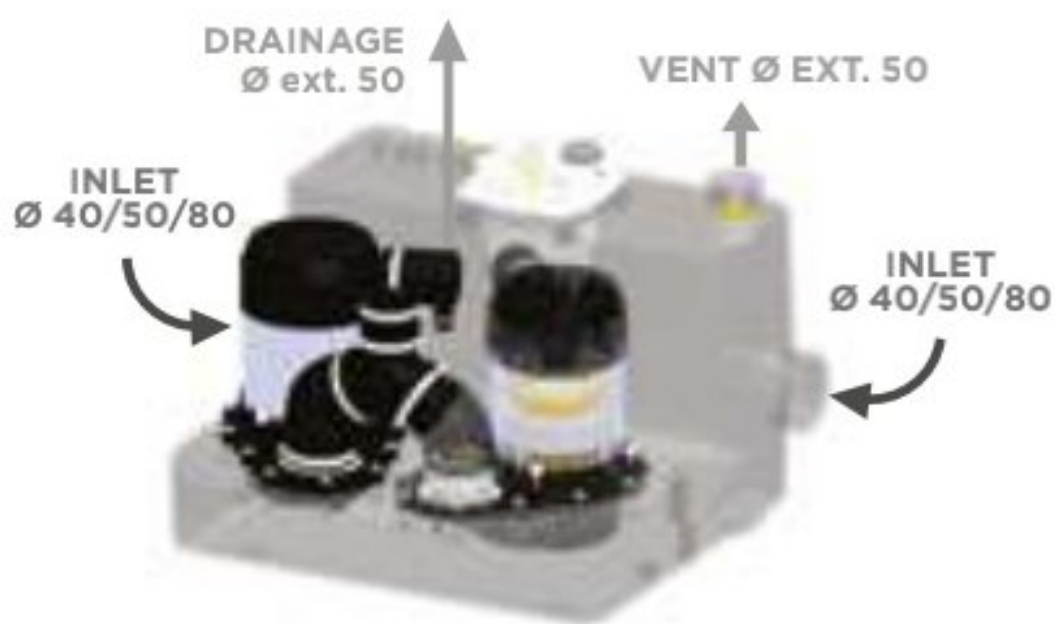

PUMP PERFORMANCE CURVE

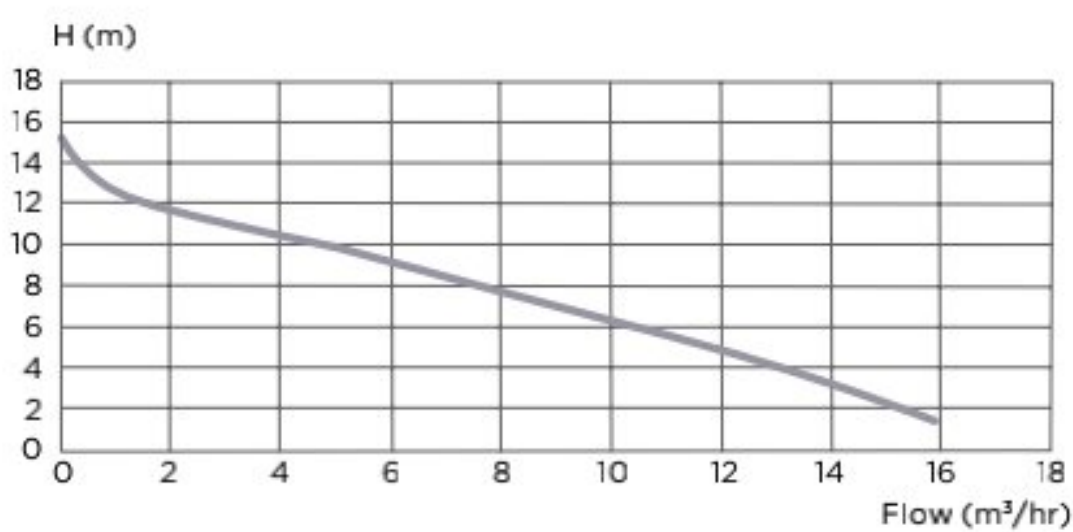

PACKING LIST

- 2-pump lifting station
- Remote control unit (2 m cable)
- 2 built-in check valves

TECHNICAL FEATURES

TANK	
Tank volume	34 L
Ø of ext. inlets	40, 50 and 80 mm
Discharge diameter ext.	50 mm
Ventilation diameter	50 mm
ON/OFF level	145 mm / 60 mm
Shower tray height	25 cm minimum
Maximum temperature of incoming wastewater	90°C intermittently (max. 5 min))
Possible connections	Grey water from bathroom (without toilet), kitchen, laundry
Wheel type	Multi-channel
Solid handling capacity	8 mm
Voltage	220-240 V/50 Hz
Power rating	2 x 1,500 W
Max. absorbed intensity	13 A
Weight (including accessories)	26 kg
Protection rating (IP)	IPX4
Electrical class	I
+ Option to connect an external alarm	

PERFORMANCE

Max. flow	16 m³/hr
Max. height (Q = 0 m³/hr)	15 m
Max. recommended height	10 m



Remote control unit
 (2 m cable)



Remote wired audible and visual alarm unit
 5 m cable (optional)
 EAN 330881584107
 BOITALARMCOM2002



APPLICATIONS



Individual

DISCHARGE

13 m



WARRANTY



REFERENCE

Sanicubic 1

EAN 3308815074429

CUBIC1NM



Sanicubic 1

Sanicubic 1

Sanicubic 1 WP



Pro X K2 grinding technology drains wastewater through a 50 mm ext. diameter hose

Removable motor and level sensors for ease of maintenance.

IP68 reinforced seals and remote control (WP version).



Compact design.

4 inlets, including 2 low ones, for greater installation flexibility.

Discreet installation (drainage Ø ext 50 mm).

Secure operation with the audio and visual alarm box.



Wired audible and visual alarm unit (5 m cable)



Pro X K2 knife



LIFTING STATIONS



APPLICATIONS



Individual

DISCHARGE

13 m



WARRANTY



REFERENCE

Sanicubic 1 WP with standard control unit
EAN 3308815074436
CUBIC1IP68NM



Remote control unit
(4 m cable)



Wired audible and visual alarm unit
(5 m cable)

85



LIFTING STATIONS

ACCESSORIES

GATE VALVES

Guillotine valves for inlet pipes

To comply with the regulations and to facilitate maintenance operations, gate valves must be installed on the effluent inlets as well as on the drainage pipe.

For pipe diameter 50

Reference: EAN 3308815061030 DN50

For pipe diameter 110 or 100 (with reducer)

Reference: EAN 3308815061023 VANNEDN100



ACTIVATED CARBON FILTER

Neutralises odours.


Reference: FILTRECUBICCSFA

EAN 3308815077529




GATE VALVES AND CARBON FILTER
AVAILABLE IN ACCESSORIES

SEMI-TRANSPARENT VIEW

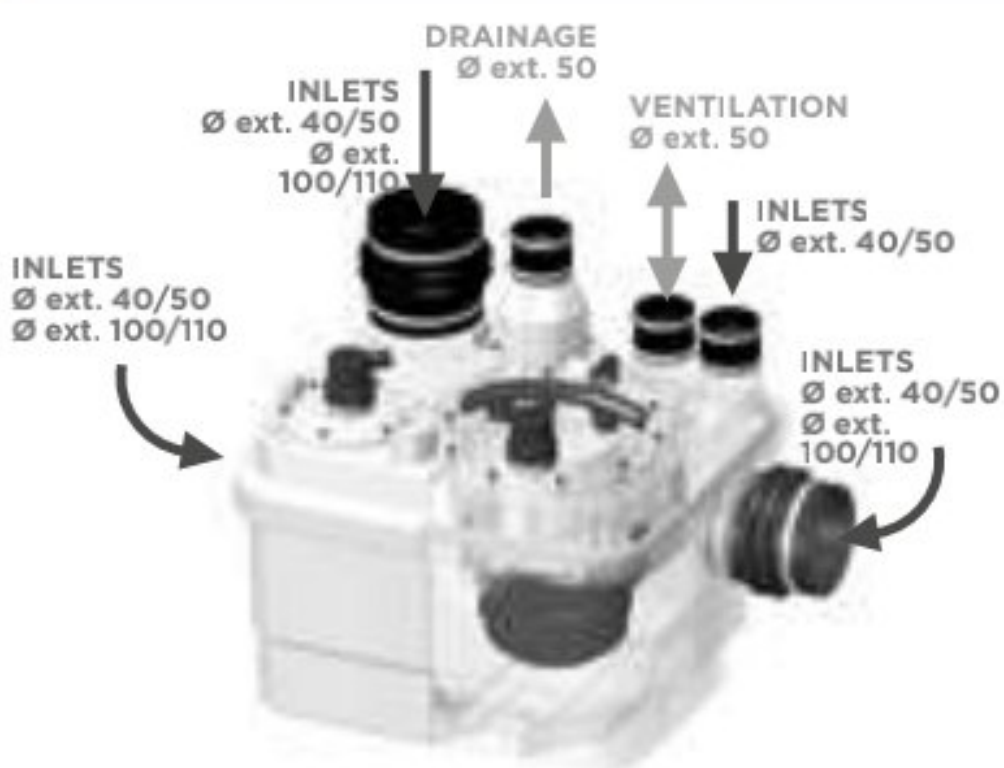

PUMP PERFORMANCE CURVE

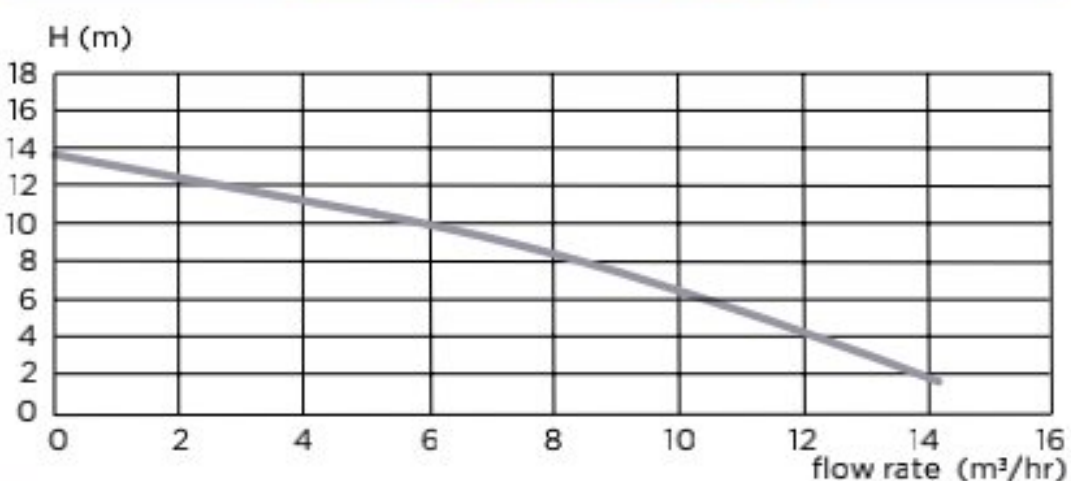

PACKING LIST

1 motor lifting station

Built-in check valve

Alarm unit

Remote control unit (WP version)

TECHNICAL FEATURES

TANK	
Tank volume	32 L
Ø of ext. inlets	• 1 inlet 40/50 mm • 3 inlets 40, 50, 100, 110 mm
Discharge diameter ext.	50 mm
Ventilation diameter	50 mm
Maximum temperature of incoming wastewater	70°C intermittently (max. 5 min)
Possible connections	Black water from several toilets, grey water from bathroom, kitchen, laundry
Wheel type	Grinder
PERFORMANCE	
Voltage	220-240 V/50 Hz
Power rating	1 x 500 W
Max. absorbed intensity	6 A
ON/OFF level	140/70 mm
Alarm level	210 mm
Weight (including accessories)	Sanicubic 1: 19.8 kg Sanicubic 1 WP: 23 kg
Protection rating (IP)	Sanicubic 1: IP67 Sanicubic 1 WP: IP68
Control unit protection rating (IP)	IPX4
Electrical class	I

PERFORMANCE

Max. flow	15 m³/hr
Max. height (Q = 0 m³/hr)	13 m
Max. recommended height	11 m

CONNECTION POSSIBILITIES



APPLICATIONS



Commercial

DISCHARGE

13 m



WARRANTY



REFERENCE

Sanicubic 2 Classic
EAN 3308815074443
R4LCIP68NM



Sanicubic 2 Classic

Sanicubic 2 Pro



ProX K2 grinding technology drains effluents through a 50 mm ext. diameter hose
Alternating (or simultaneously in case of an alarm) 2 pump operation (perfect for small buildings, businesses and public places).

Removable motors and level sensors for ease of maintenance.

IP68 reinforced seal.



Compact design.

5 inlets, including 2 low ones, for greater installation flexibility.

Discreet installation.

Secure operation thanks to control and alarm units.



Remote control unit
(4 m cable)



Wired audible and visual alarm unit
(5 m cable)



Pro X K2
knife

APPLICATIONS



Commercial

DISCHARGE

13 m



WARRANTY



References:

Sanicubic 2 Pro with classic unit

EAN: 3308815074450
R4STDIP68NM

Sanicubic 2 Pro with SMART unit

EAN 3308815075457
R4STDIP68NMSMART



Remote control unit (4 m cable)



Interactive SMART control unit



Wireless remote control alarm unit (HF)



ACCESSORIES

GATE VALVES

Guillotine valves for inlet pipes

To comply with the regulations and to facilitate maintenance operations, gate valves must be installed on the effluent inlets as well as on the drainage pipe.



For pipe diameter 50
Reference: EAN
3308815061030
DNS0

For pipe diameter 110 or 100 (with reducer)
Reference: EAN
3308815061023
VANNEDN100

ACTIVATED CARBON FILTER


Neutralises odours.

Reference:
FILTRECUBICSFA
EAN 3308815077529



GATE VALVES AND CARBON FILTER AVAILABLE IN ACCESSORIES


SEMI-TRANSPARENT VIEW

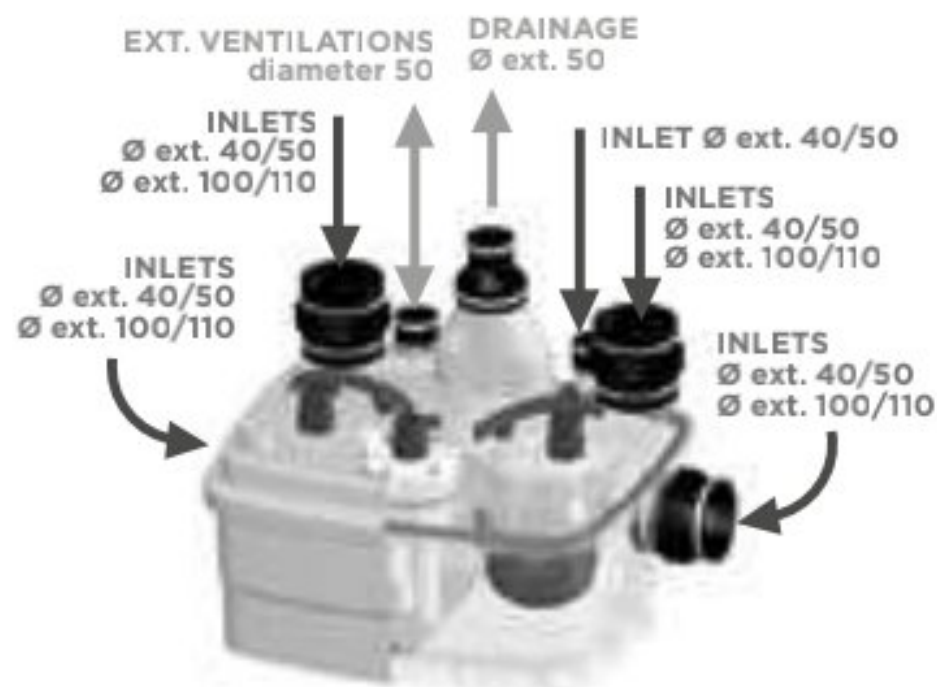


TECHNICAL FEATURES

Tank volume	45 L
Ø of ext. inlets	• 1 inlet 40 / 50 mm • 4 inlets 40 / 50 / 100 / 110 mm
Discharge diameter ext.	50 mm
Ventilation diameter	50 mm
Maximum temperature of incoming wastewater	70°C intermittently (max. 5 min)
Possible connections	Black water from several toilets, grey water from bathroom, kitchen, laundry
Wheel type	Grinder
Voltage	220-240 V/50 Hz
Power rating	2 x 1 500 W
Max. absorbed intensity	13 A
ON/OFF level	140 / 60 mm
Alarm level	210 mm
Weight (including accessories)	35 kg
Protection rating (IP)	IP68 (Pro) IP68 (Classic)
Control unit protection rating (IP)	IPX4
Electrical class	I

PUMP PERFORMANCE CURVE

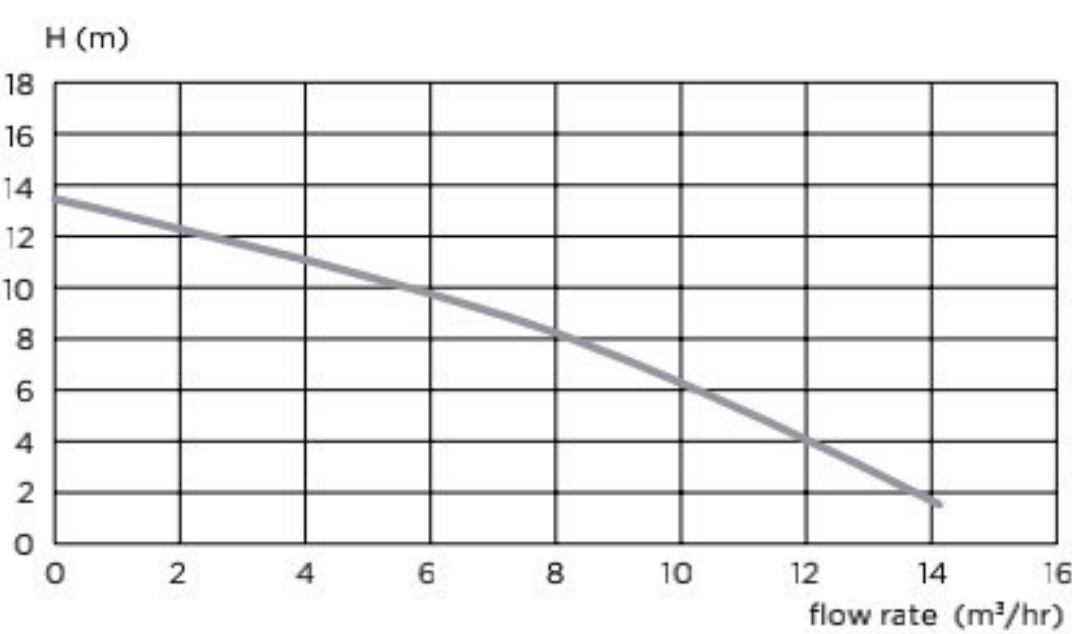


2 MOTOR SMART SYSTEM

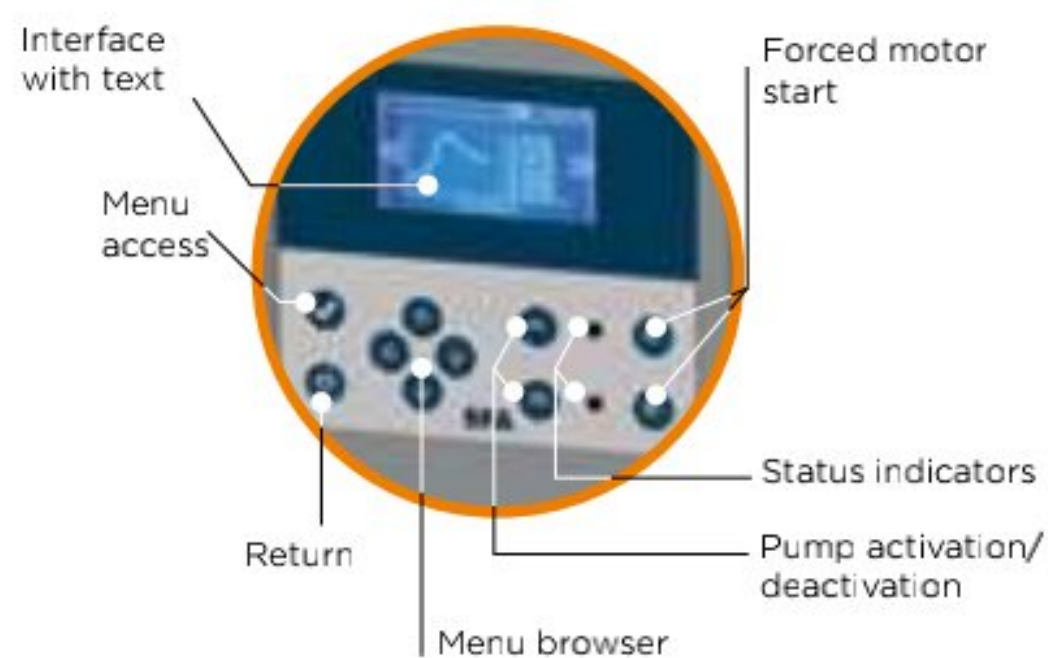

PACKING LIST

- 2 motor pumping station
- 2 built-in check valves
- Remote control unit
- Alarm unit
- BMS Connector: dry switch for alarm

CONNECTION POSSIBILITIES

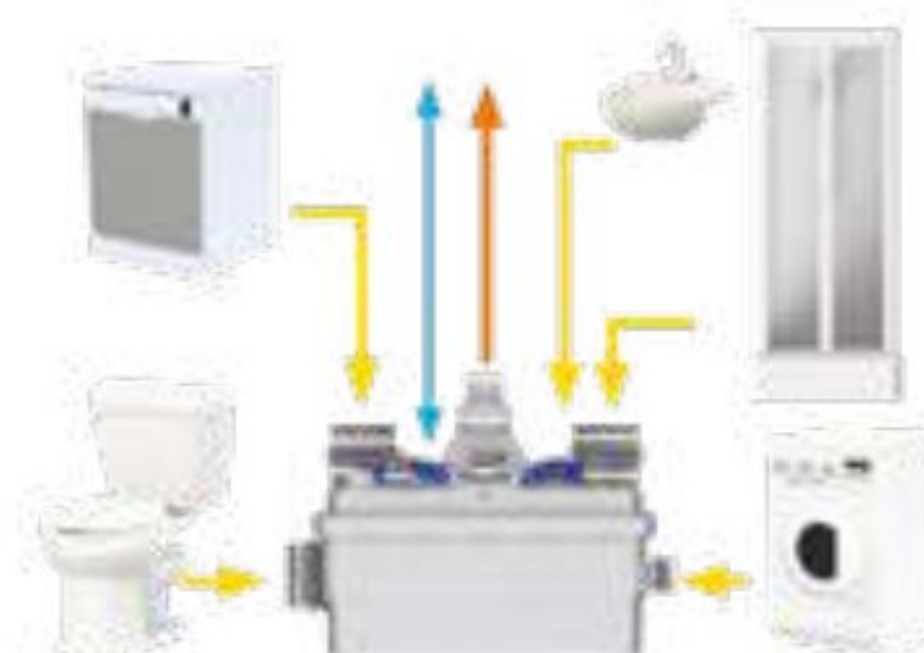

APPLICATIONS



Individual



Commercial

DISCHARGE

22 to 39 m



WARRANTY



REFERENCES

See table right page



Sanicubic 1 GR




Pro X K3 Grinder



- It collects all waste water from toilets, bathrooms, kitchens or laundry rooms.
- Easy installation and accessibility.
- Compact dimensions.

- 7 inlets. Grinding wheel.
- 5 single or three-phase pump versions.
- Connections and non-return valve integrated.


SEMI-TRANSPARENT VIEW

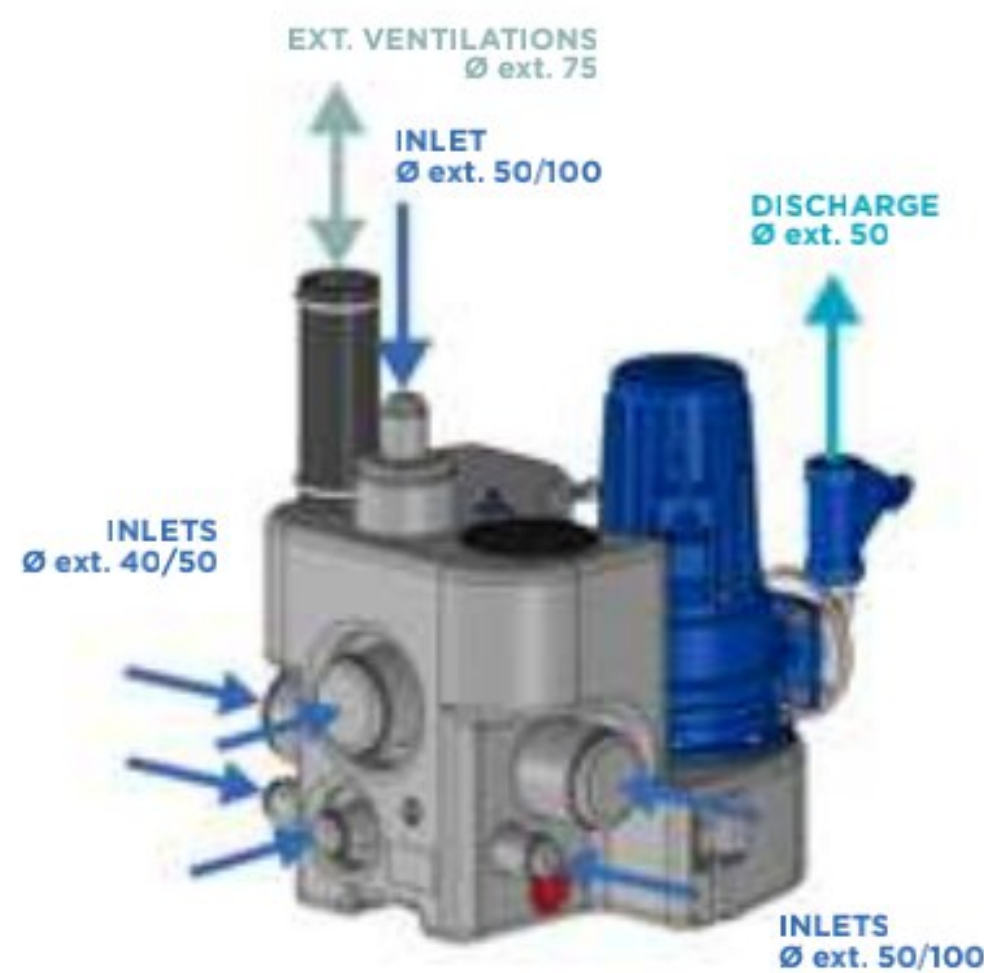

PERFORMANCE

TMH max.	39 m
Max. flow rate	17 m ³ /h

PUMP PERFORMANCE CURVE

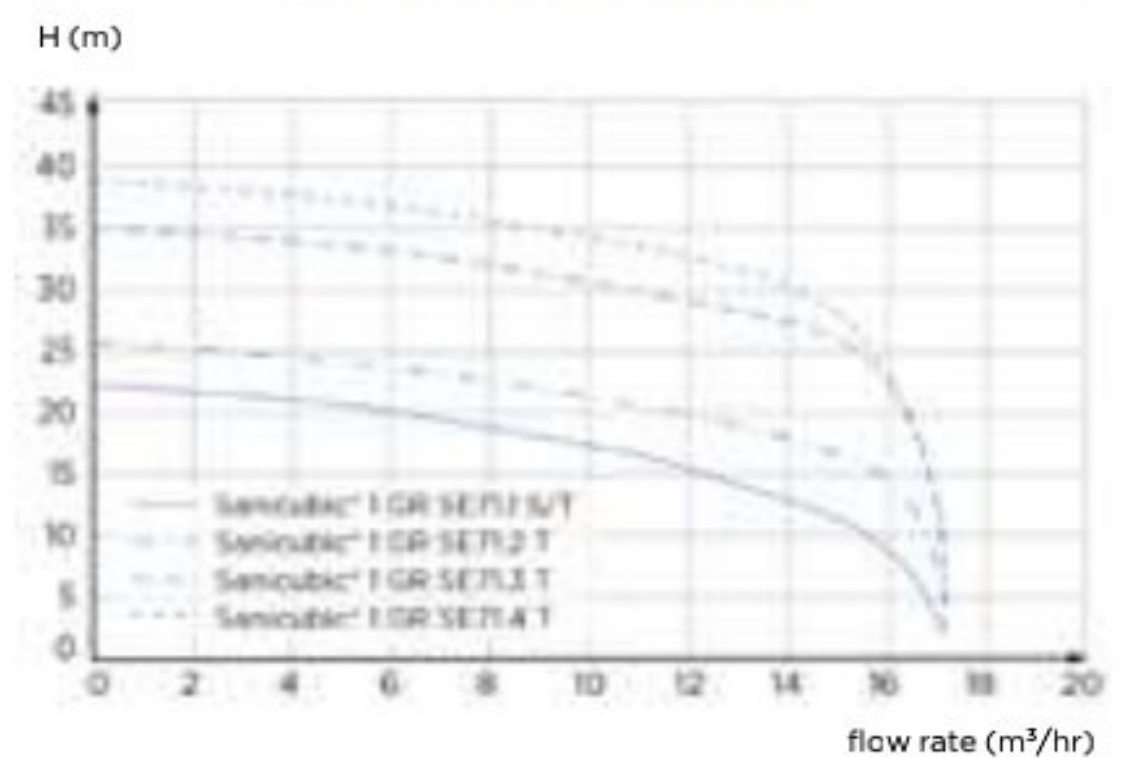

APPLICATIONS



Individual



Commercial

DISCHARGE


22 to 39 m



Control box ZPS - single pump version

Pneumatically controlled remote control box including an audible and visual alarm.

DIMENSIONS

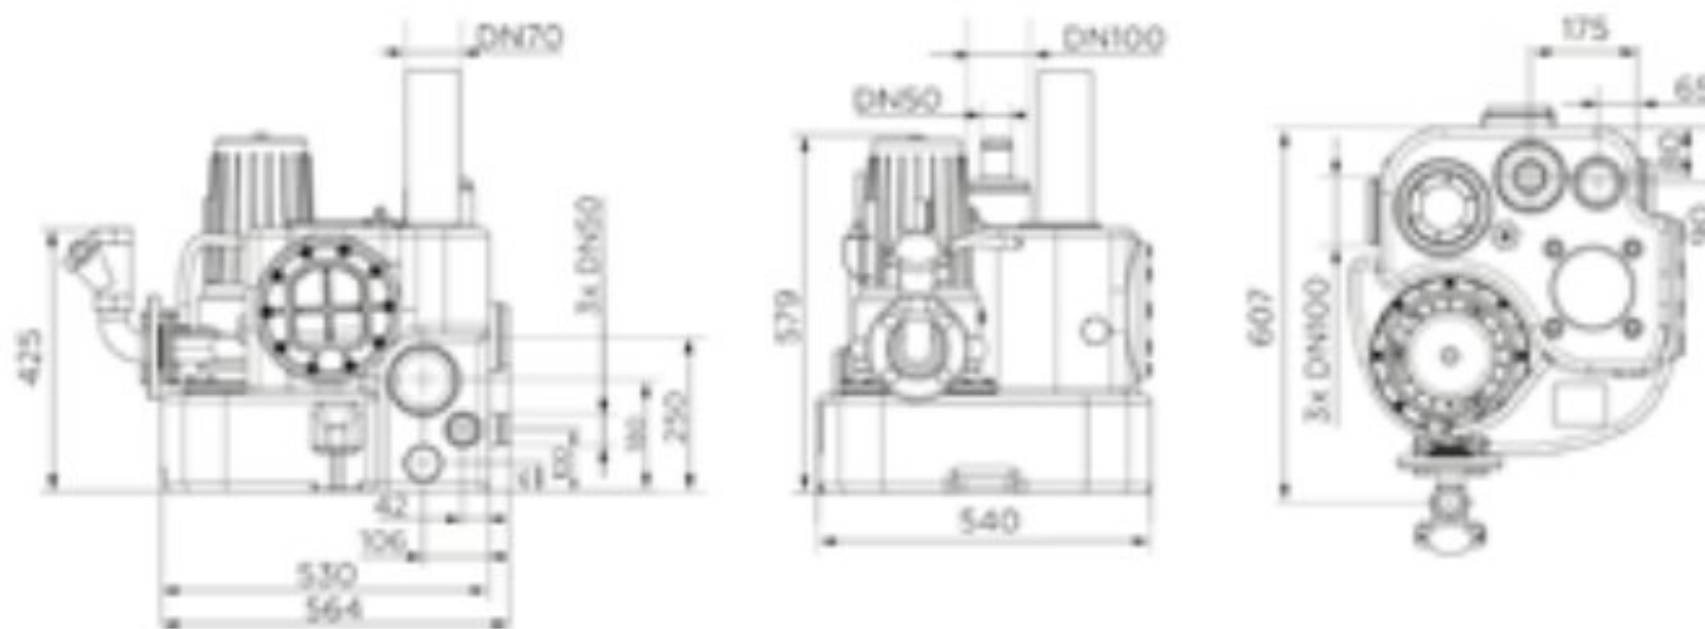

	SANICUBIC 1 GR SE71.1 S	SANICUBIC 1 GR SE71.1 T	SANICUBIC 1 GR SE71.2 T	SANICUBIC 1 GR SE71.3 T	SANICUBIC 1 GR SE71.4 T
Type of control box	ZPS 1 case	ZPS 1 case	ZPS 1 case	ZPS 1 case	ZPS 1 case
MATERIALS					
Tank	PE LD	PE LD	PE LD	PE LD	PE LD
Pump housing	GG-20	GG-20	GG-20	GG-20	GG-20
Motor housing	GG-20	GG-20	GG-20	GG-20	GG-20
Impeller	GG-20	GG-20	GG-20	GG-20	GG-20
ELECTRICALS FEATURES					
Voltage (V)	230	400	400	400	400
Frequency (Hz)	50-60	50-60	50-60	50-60	50-60
Power consumption P1 (P=power) (W)	2200	2100	2100	3900	3900
Power output P2 (P=power) (W)	1700	1700	1700	3200	3200
Mode of operation	S3 25%	S3 25%	S3 25%	S3 25%	S3 25%
IP Rating	IP68	IP68	IP68	IP68	IP68
HYDRAULICS					
Total manometric head (m)	22	25	25	35	39
Max. flow rate (m³/h)	17	17	17	17	17
Inlet diameter DN	50, 100	50, 100	50, 100	50, 100	50, 100
Discharge diameter DN	50	50	50	50	50
Ext.ventilation diameter (mm)	75	75	75	75	75
Total volume (L)	55	55	55	55	55
ON Level /OFF level (mm)	140-250/30	140-250/30	140-250/30	140-250/30	140-250/30
Alarm level (mm)	180-290	180-290	180-290	180-290	180-290
Max. temperature of the pumped liquid (5 min)	55°C	55°C	55°C	55°C	55°C
Type of wheel	Grinder	Grinder	Grinder	Grinder	Grinder
Type of activation	Pneumatic	Pneumatic	Pneumatic	Pneumatic	Pneumatic
IDENTIFICATION AND LOGISTICS					
Gross weight (kg)	64	64	64	68	68
EAN code	3308815079110	3308815079127	3308815079134	3308815079141	3308815079158
Factory code	CUBIC1GRSE71-1S	CUBIC1GRSE71-1T	CUBIC1GRSE71-2T	CUBIC1GRSE71-3T	CUBIC1GRSE71-4T

(DN=nominal diameter)

APPLICATIONS



Individual



Commercial

DISCHARGE

22 to 39 m




WARRANTY



REFERENCES

See table right page

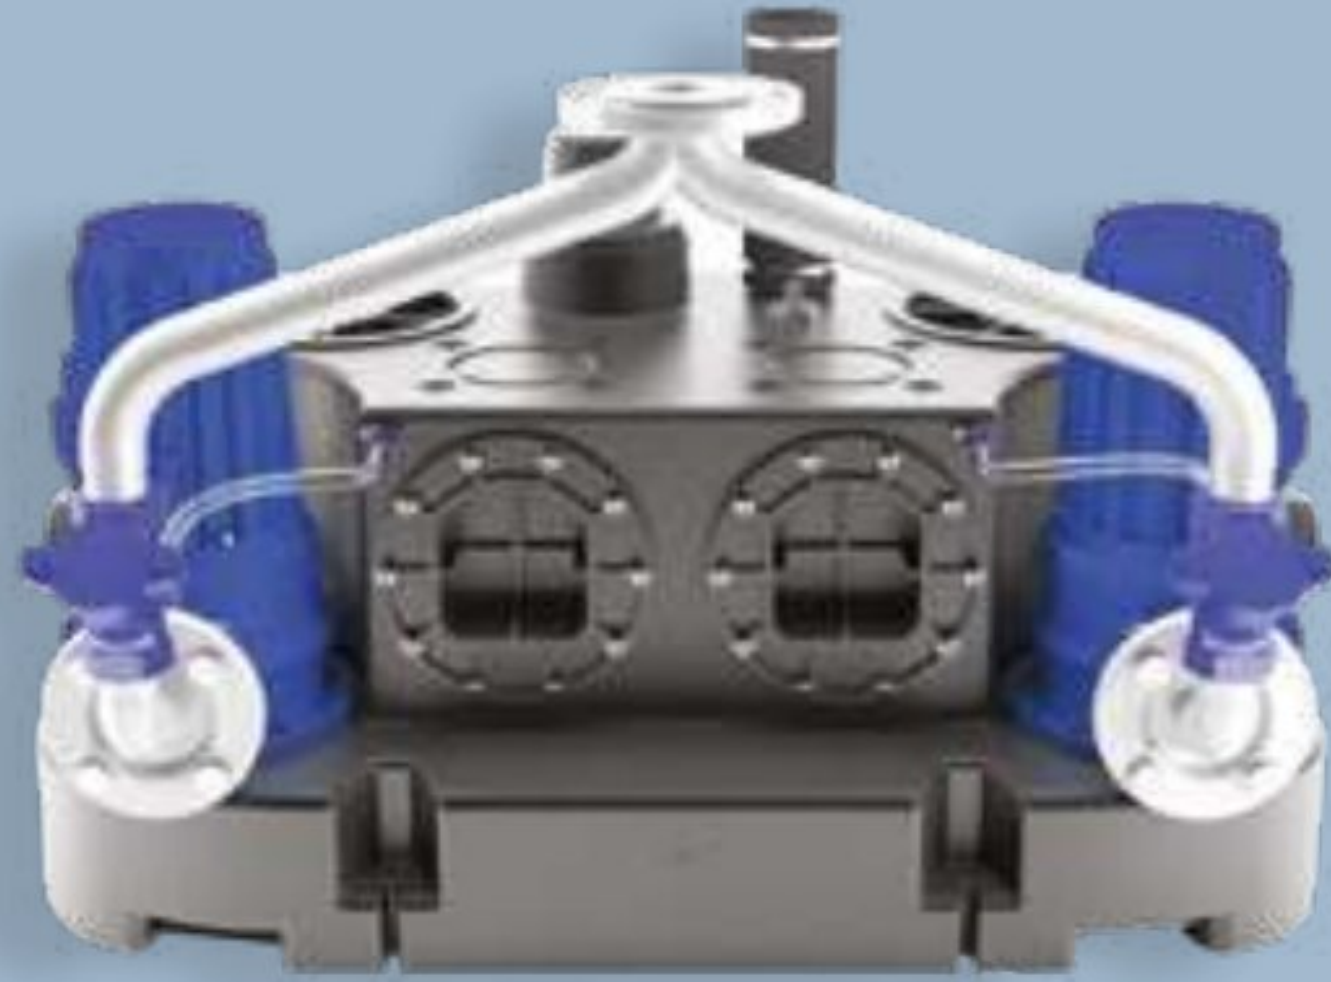

Sanicubic 2 GR




- Installation without clearance.
- Accessibility for maintenance purposes.
- Slicing wheels.
- 3 inlets DN 100, 2 inlets DN 50.

- 150 litre tank.
- 4 three-phase versions.
- Incl. non-return valve & outlet flange.



Pro X K3 Grinder


SEMI-TRANSPARENT VIEW

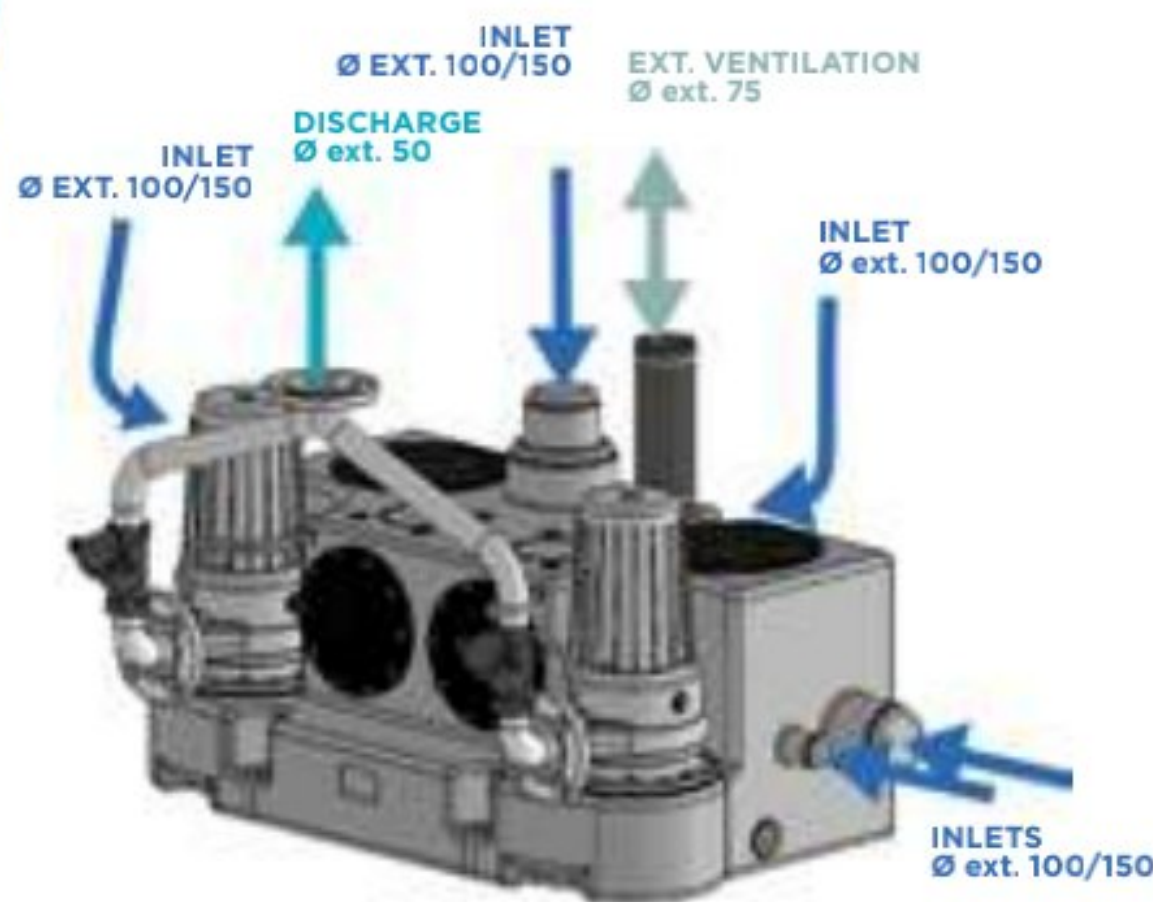

PERFORMANCE

TMH max.	39 m
Max. flow rate	17 m ³ /h

PUMP PERFORMANCE CURVE

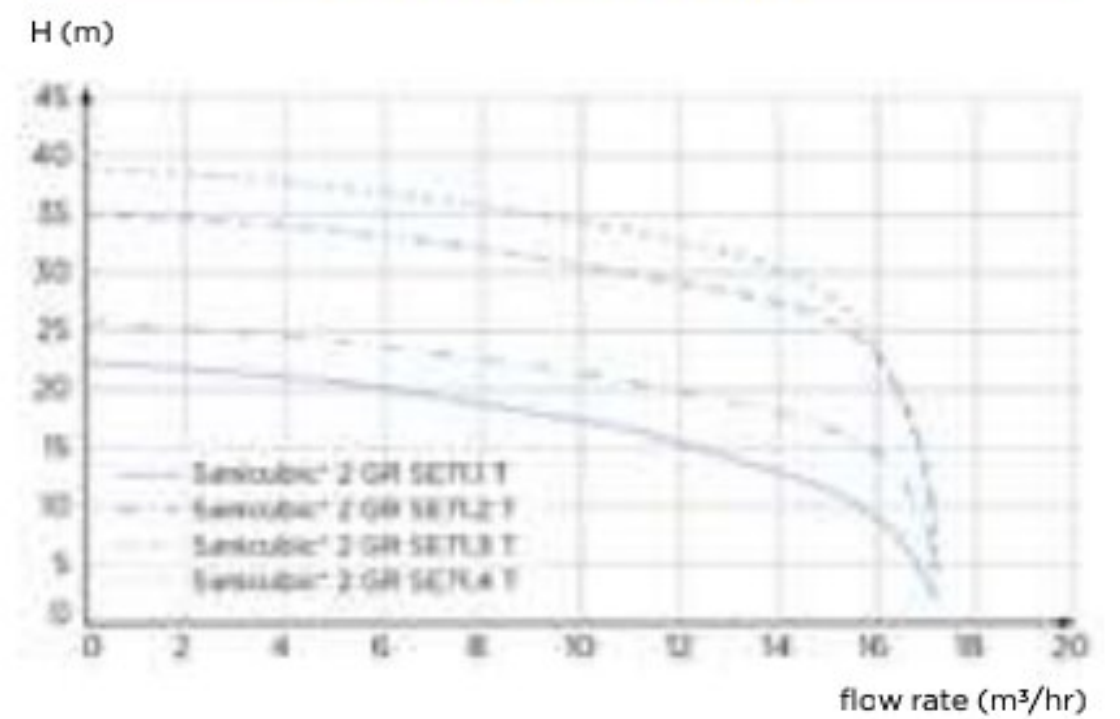

APPLICATIONS



Individual



Commercial

DISCHARGE


22 to 39 m



ZPS control box - two-pump versions

Pneumatically controlled remote control box including an audible and visual alarm.

DIMENSIONS

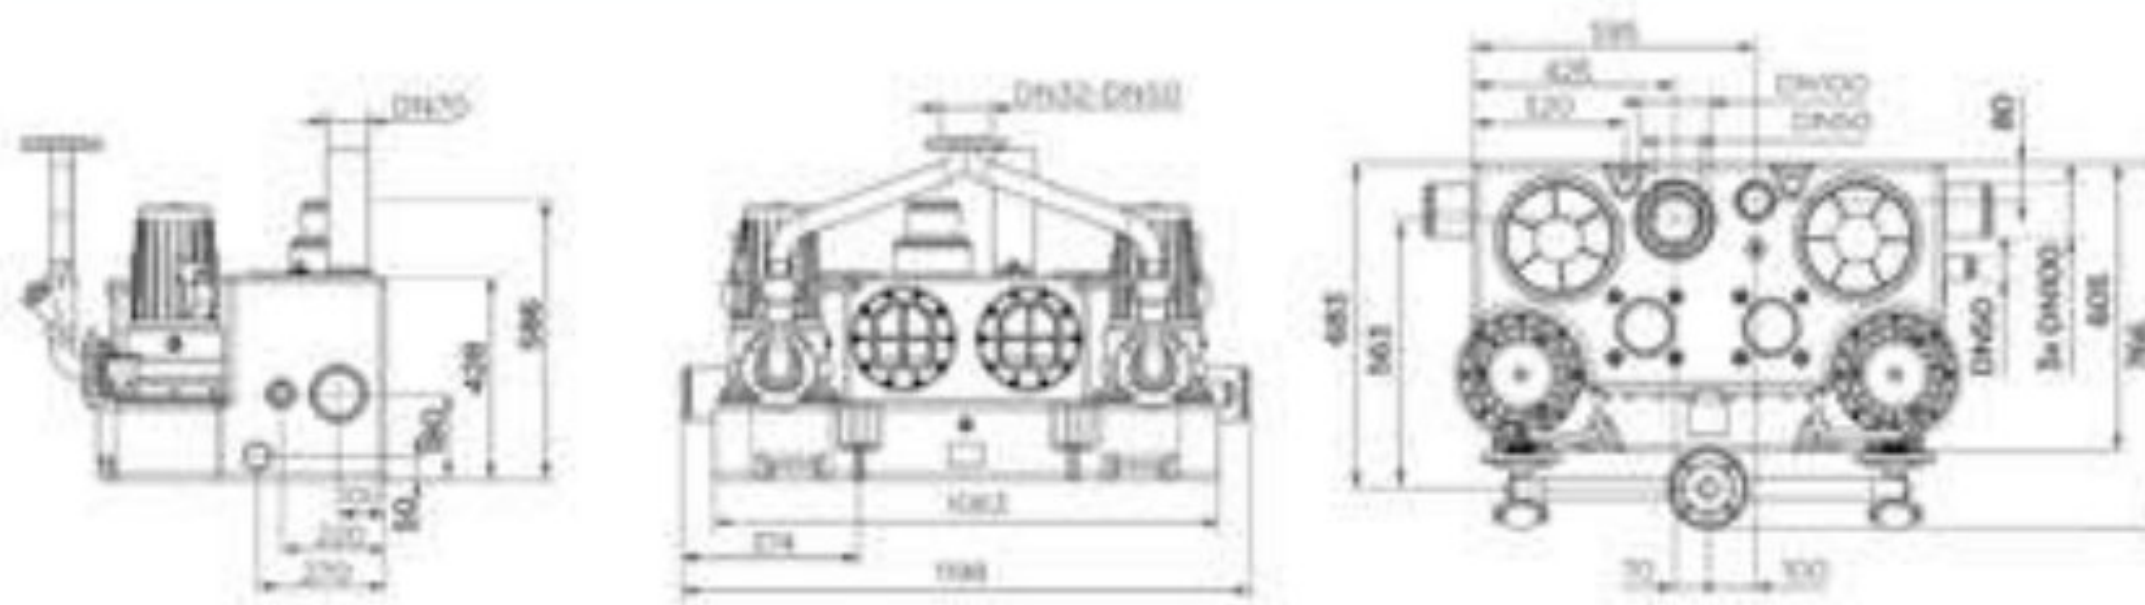

	SANICUBIC® 2 GR SE71.1 T	SANICUBIC® 2 GR SE71.2 T	SANICUBIC® 2 GR SE71.3 T	SANICUBIC® 2 GR SE71.4 T
Type of control box	ZPS 2 case	ZPS 2 case	ZPS 2 case	ZPS 2 case
MATERIALS				
Tank	PE LD	PE LD	PE LD	PE LD
Pump housing	GG-20	GG-20	GG-20	GG-20
Motor housing	GG-20	GG-20	GG-20	GG-20
Impeller	GG-20	GG-20	GG-20	GG-20
ELECTRICALS FEATURES				
Voltage (V)	400	400	400	400
Frequency (Hz)	50-60	50-60	50-60	50-60
Power consumption P1 (P=power) (W)	2100	2100	3900	3900
Power output P2 (P=power) (W)	1700	1700	3200	3200
Mode of operation	S3 25%	S3 25%	S3 25%	S3 25%
IP Rating	IP68	IP68	IP68	IP68
HYDRAULICS				
Total manometric head (m)	22	25	35	39
Max. flow rate (m³/h)	17	17	17	17
Inlet diameter DN	100, 150	100, 150	100, 150	100, 150
Discharge diameter DN	50	50	50	50
Ext.ventilation diameter (mm)	75	75	75	75
Total volume (L)	150	150	150	150
ON Level /OFF level (mm)	140-250/30	140-250/30	140-250/30	140-250/30
Alarm level (mm)	180-290	180-290	180-290	180-290
Max. temperature of the pumped liquid (5 min)	55°C	55°C	55°C	55°C
Type of wheel	Grinder	Grinder	Grinder	Grinder
Type of activation	Pneumatic	Pneumatic	Pneumatic	Pneumatic
IDENTIFICATION AND LOGISTICS				
Gross weight (kg)	137	137	144	144
EAN code	3308815079165	3308815079172	3308815079189	3308815079196
Factory code	CUBIC2GRSE71-1T	CUBIC2GRSE71-2T	CUBIC2GRSE71-3T	CUBIC2GRSE71-4T

(DN=nominal diameter)

APPLICATIONS



Individual



Commercial

DISCHARGE

13 m



WARRANTY



REFERENCE

Sanicubic 1 VX
with classic unit:
EAN 3308815077611
CUBIC1XLVX



Sanicubic 1 VX



Vortex wheel system
(clearance: 50 mm).

Removable motor and level sensors
for ease of maintenance.

A large capacity tank.

IP68 certified seal.



A single motor with Vortex
wheel for all requirements.

Several inlets available to adapt
to all configurations.

Remote control box and alarm unit
supplied as standard
for reliable operation.



KX V6 Vortex
Wheel

APPLICATIONS



DISCHARGE

13 m



WARRANTY



Remote control unit
(4 m cable)



Wired audible and
visual alarm unit
(5 m cable)

ACCESSORIES

GATE VALVES

Guillotine valves for inlet pipes

To comply with the regulations and to facilitate maintenance operations, gate valves must be installed on the effluent inlets as well as on the drainage pipe.

For pipe diameter 50

Reference: EAN 3308815061030 DN50

For pipe diameter 110 or 100 (with reducer)

Reference: EAN 3308815061023 VANNEDN100

Ball valve for drainage

Reference: EAN 3308815066820 DN100XL

ACTIVATED CARBON FILTER


Neutralises odours.

Reference: FILTRECUBICSFA
EAN 3308815077529




GATE VALVES AND CARBON FILTER AVAILABLE IN ACCESSORIES

SEMI-TRANSPARENT VIEW

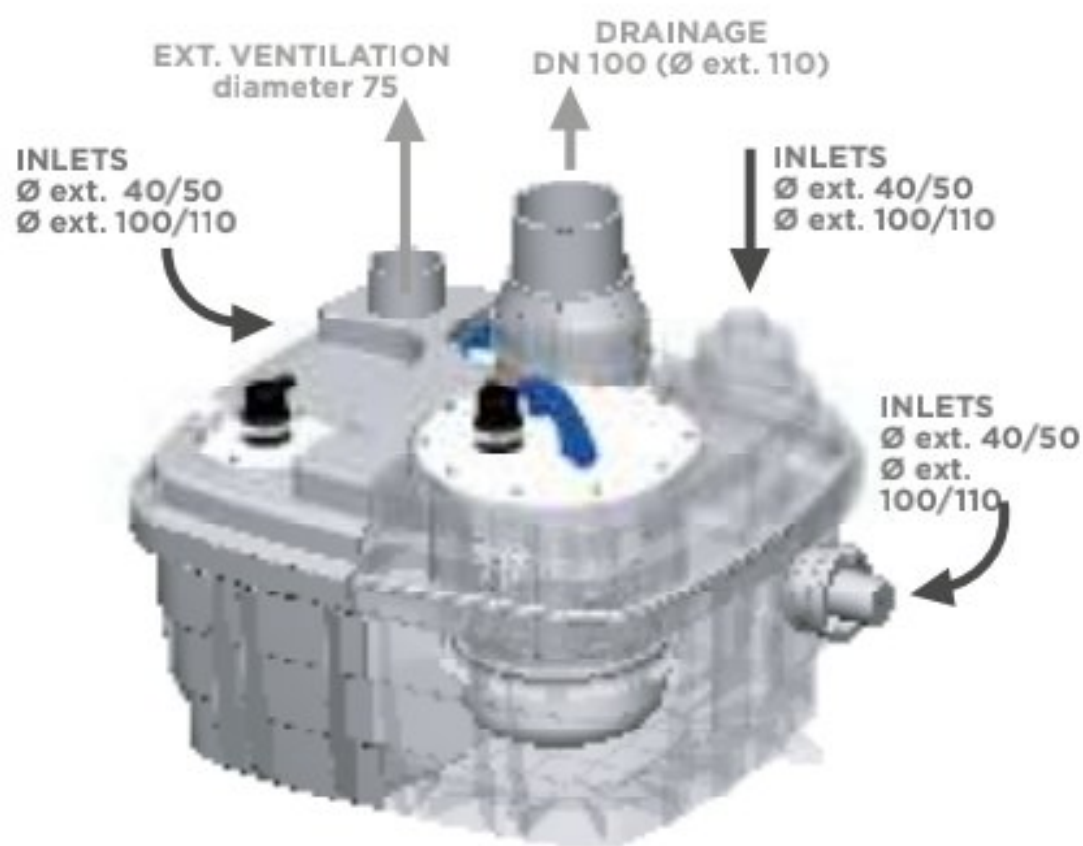

PUMP PERFORMANCE CURVE

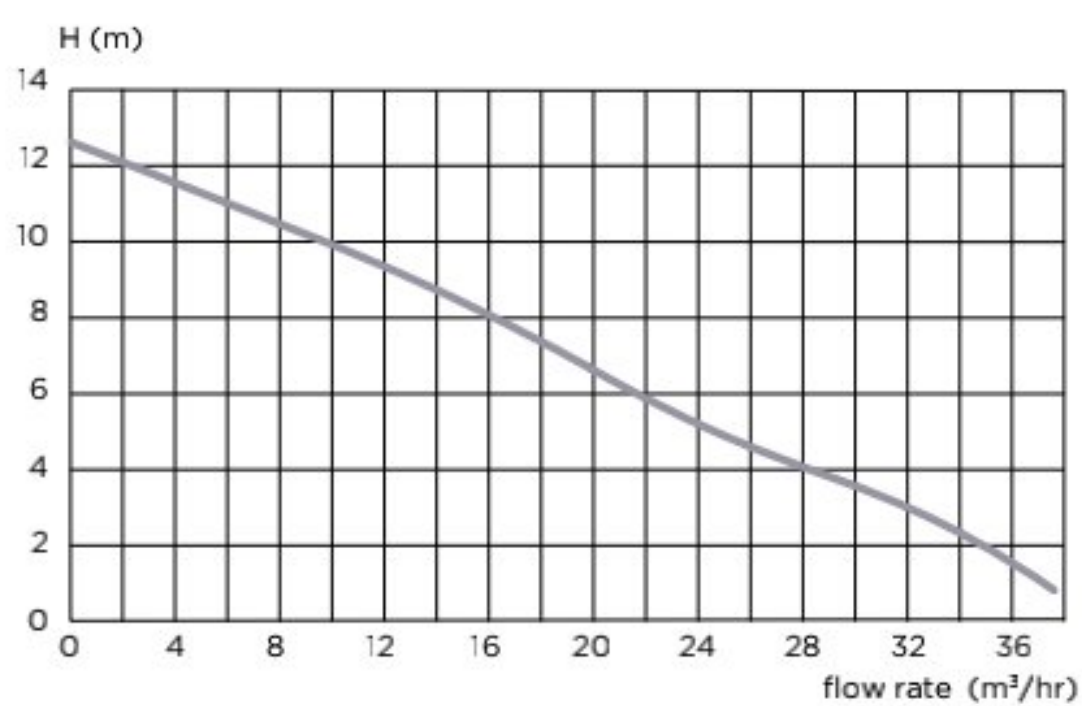

PACKING LIST

- 1 motor pumping station
- 1 built-in check valve
- Remote control unit
- Remote alarm unit

TECHNICAL FEATURES

TANK	
Tank volume	60 L
Ø of ext. inlets	125 / 110 / 100 / 50 / 40 mm
Discharge diameter ext.	90 / 110 mm
Ventilation diameter	75 mm
Maximum temperature of incoming wastewater	70°C intermittently (max. 5 min)
Possible connections	Black water from several toilets, grey water from bathrooms, kitchen, laundry
PERFORMANCE	
Wheel type	Vortex
Voltage	220-240 V / 50 Hz
Power rating	2,000 W
Max. absorbed intensity	8 A
ON/OFF level	165 / 95 mm
Alarm level	235 mm
Weight (including accessories)	30 kg
Protection rating (IP)	IP 68
Control unit protection rating (IP)	IPX4
Electrical class	I

PERFORMANCE

Max. flow	40 m³/hr
Max. height (Q = 0 m³/hr)	13 m
Max. recommended height	10 m (DN 80) / 6 m (DN 100)

CONNECTION POSSIBILITIES



APPLICATIONS



Commercial



Collective

DISCHARGE

13 m



WARRANTY



REFERENCES

Sanicubic 2 VX
Single-phase with
standard unit:

EAN: 3308815063140
CUBIC2XLVX

Sanicubic 2 VX
Single-phase with
SMART unit

EAN 3308815076171
CUBIC2XLVXSMART



Remote control unit
(4 m cable)



Smart control unit



Wired audible and
visual alarm unit
(5 m cable)



Sanicubic 2 VX Single-phase

Sanicubic 2 VX Three-phase



Vortex Wheel
(clearance: 50 mm).

Available in
single-phase and three-phase.

Direct and safe access
to the motors and level sensors.



2 motors for more intense use: perfect for blocks
of flats, professional buildings, restaurant, schools,
hotels, shopping centres.

5 inlets, including 2 low ones, to adapt
to all configurations.

Remote control box and alarm unit
supplied as standard
for reliable operation.



KX V6 Vortex
Wheel

APPLICATIONS



DISCHARGE

17 m
↑

WARRANTY



REFERENCES
Sanicubic 2 VX
Three-phase

EAN 3308815074689
CUBIC2XLVXTRI

Sanicubic 2 VX
Three-phase with
SMART unit

EAN 3308815076188
CUBIC2XLVXTRISMART



Remote control unit
(4 m cable)



Smart control unit



Wired audible
and visual
alarm unit
(5 m cable)

ACCESSORIES

GATE VALVE
DN100 ball valve for drainage:
Specifically for the Sanicubic 2 VX
and 1 VX

Reference: EAN 3308815066820
DN100XL



ACTIVATED CARBON FILTER

Neutralises odours.

Reference: FILTRECUBICXL SFA
EAN 3308815076874



GATE VALVES AND CARBON FILTER AVAILABLE IN ACCESSORIES

Guillotine valves for inlet pipes


To comply with the regulations and to facilitate maintenance operations, gate valves must be installed on the effluent inlets as well as on the drainage pipe.

For pipe diameter 50
Reference:
EAN 3308815061030
DN50



For pipe diameter 110
or 100 (with reducer)
Reference:
EAN 3308815061023
VANNEDN100


SEMI-TRANSPARENT VIEW

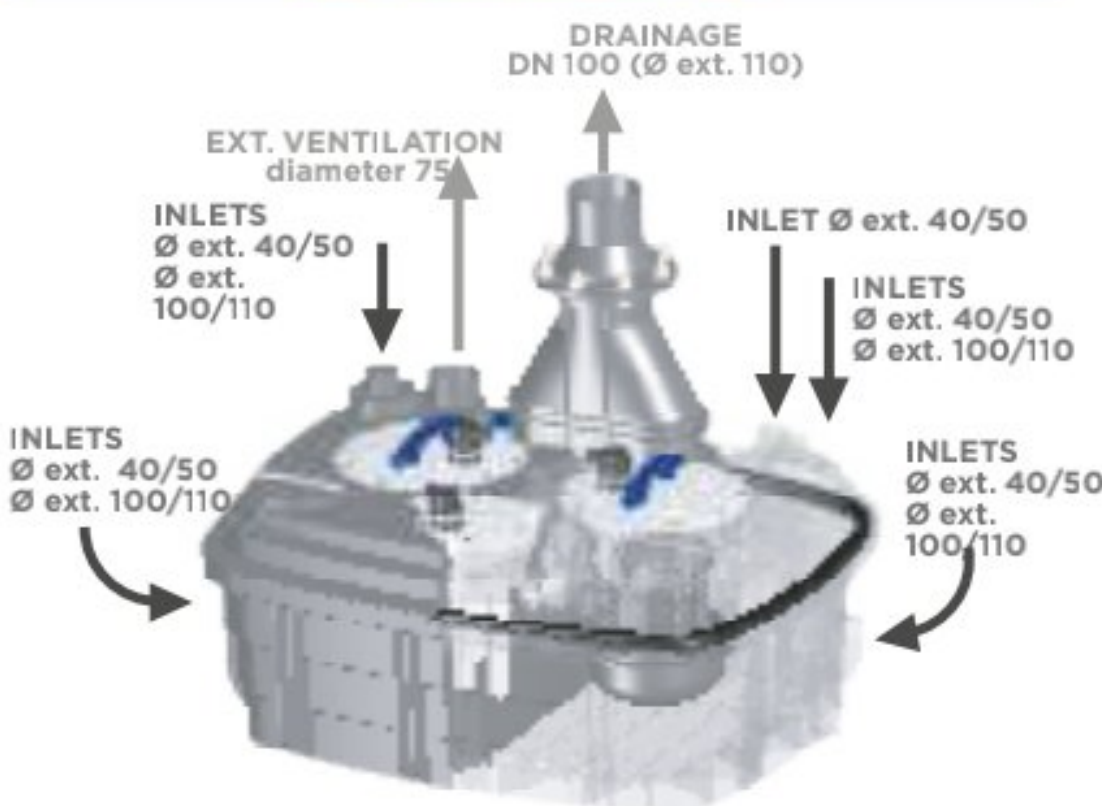

TECHNICAL FEATURES

Tank volume	120 L
Ø of ext. inlets	• 1 inlet 40 / 50 mm • 4 inlets 40 / 50 / 100 / 110 mm
Discharge diameter ext.	110 mm
Ventilation diameter	75 mm
Maximum temperature of incoming wastewater	70°C intermittently (max. 5 min)
Possible connections	Black water from several toilets, grey water from bathroom, kitchen, laundry
Wheel type	Vortex (50 mm clearance)
Voltage	Sanicubic 2 VX single-phase: 220-240 V / 50 Hz three-phase: 230-400V / 50 Hz
Power rating	Sanicubic 2 VX single-phase: 2 x 2,000 W three-phase: 2 x 3,500 W
Max. absorbed intensity	Sanicubic 2 VX single-phase: 16 A three-phase: 12 A
ON/OFF level	165 / 95 mm
Alarm level	235 mm
Weight (including accessories)	Sanicubic 2 VX single-phase: 101 kg three-phase: 102 kg
Protection rating (IP)	IP68
Control unit protection rating (IP)	IPX4
Electrical class	I

PUMP PERFORMANCE CURVE

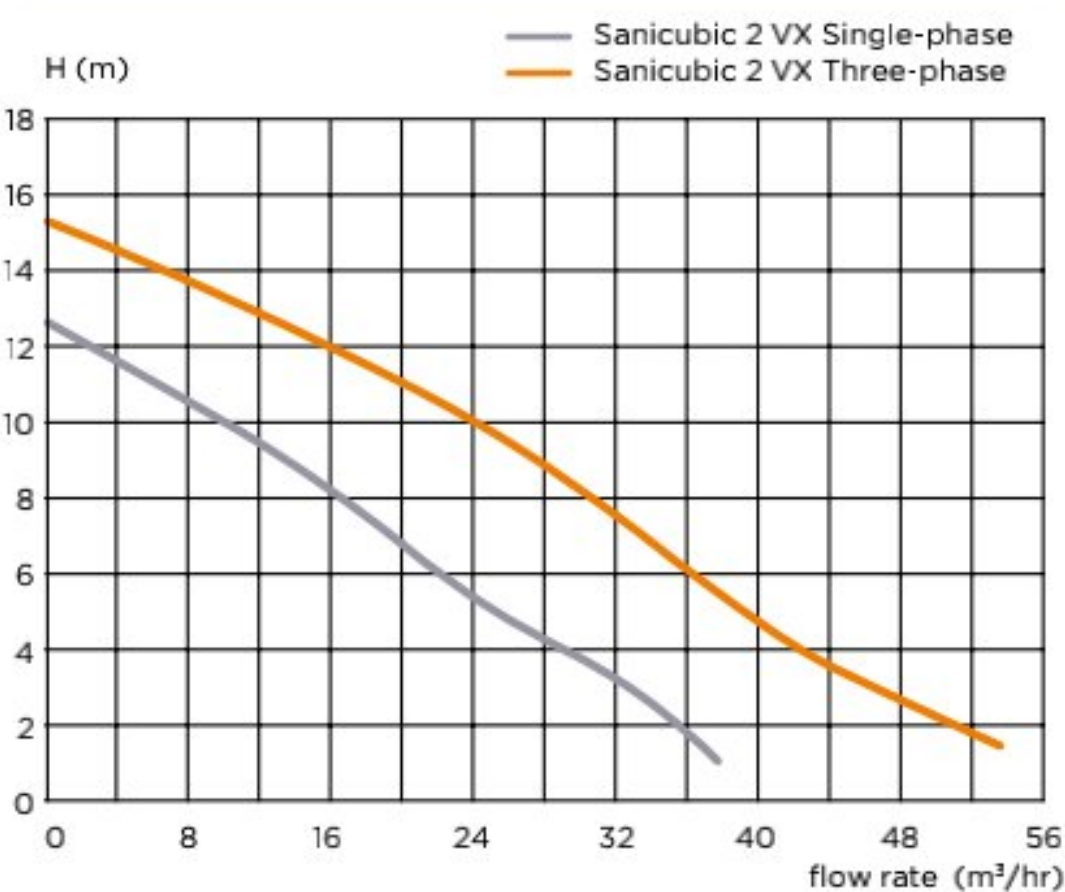

CONNECTION POSSIBILITIES



PERFORMANCE

Max. flow	Sanicubic 2 VX single-phase: 40 m³/hr three-phase: 55 m³/hr
Max. height (Q = 0 m³/hr)	Sanicubic 2 VX single-phase: 13 m three-phase: 16 m
Max. recommended height	Sanicubic 2 VX single-phase: 6 m (DN 100) and 10 m (DN 80) three-phase: 11 m (DN 100) 14 m (DN 80)

PACKING LIST

- 2 motor pumping station
- 2 built-in check valves
- Remote control unit
- Remote alarm unit
- BMS Connector: dry switch for alarm



APPLICATIONS



Individual



Commercial

DISCHARGE

10 to 22 m



WARRANTY



REFERENCES

See table right page

Sanicubic 1 SC



Single-channel impeller



Designed for lifting waste water from public buildings or shopping centers.

Easy installation and accessibility.

1 inlet DN150.

Three-phase cast iron pump.


Free passage 80 mm or 100 mm.

Control box included (ZPS or PS2).

Start star-delta for the Sanicubic 1 SC7.5T version.

Possible customisation of the station (tank volume and inlets) for tailor-made installation.


SEMI-TRANSPARENT VIEW

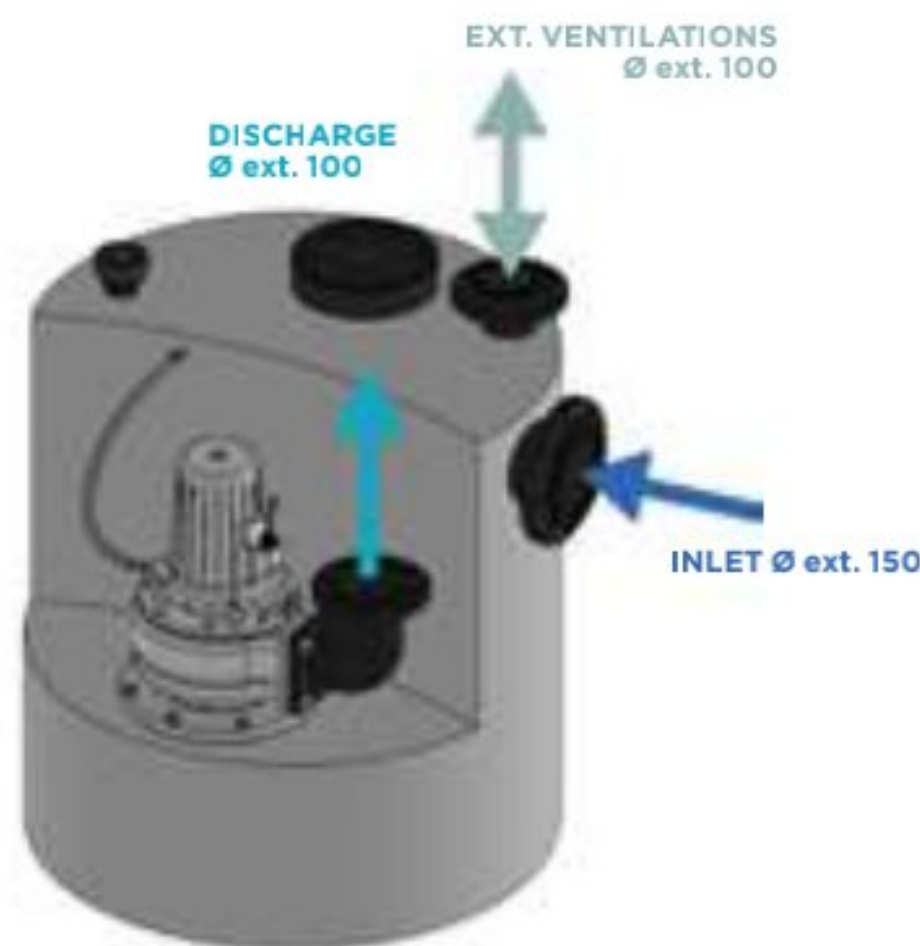

PERFORMANCE

TMH max.	22 m
Max. flow rate	165 m ³ /h

PUMP PERFORMANCE CURVE

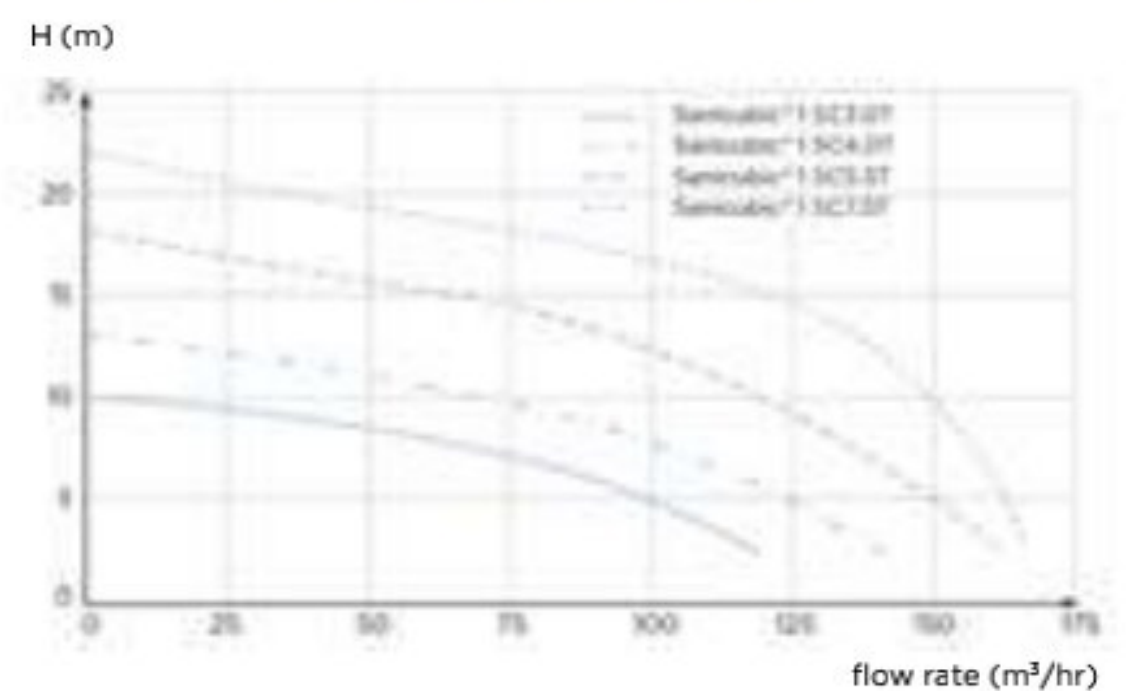

APPLICATIONS



Individual



Commercial

DISCHARGE

10 to 22 m




Control box ZPS - single pump version

Pneumatically controlled remote control box including an audible and visual alarm.



PS2 system box
Depending on model

DIMENSIONS

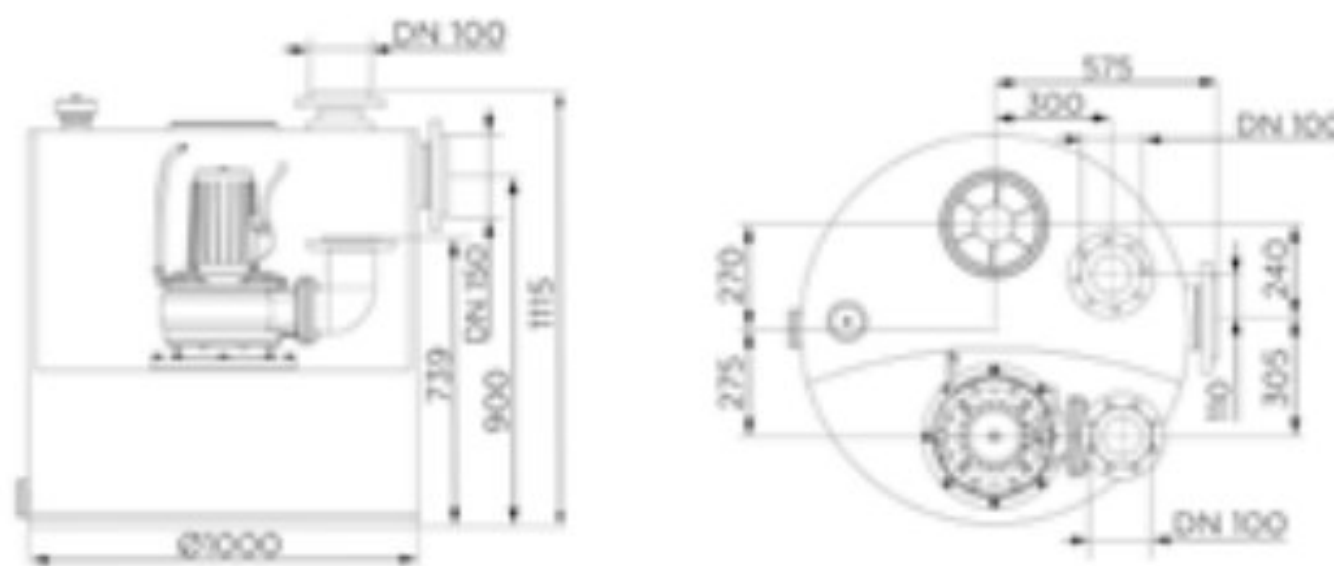

	SANICUBIC 1 SC3.0 T	SANICUBIC 1 SC4.0 T	SANICUBIC 1 SC5.5 T	SANICUBIC 1 SC7.5 T
Type of control box	ZPS 1 case	ZPS 1 case	ZPS 1 case	PS2 System case
MATERIALS				
Tank	PE HD	PE HD	PE HD	PE HD
Pump housing	GG-20	GG-20	GG-20	GG-20
Motor housing	GG-20	GG-20	GG-20	GG-20
Impeller	GG-20	GG-20	GG-20	GG-20
ELECTRICALS FEATURES				
Voltage (V)	400	400	400	400
Frequency (Hz)	50-60	50-60	50-60	50-60
Power consumption P1 (P=power) (W)	4000	5500	6300	8700
Power output P2 (P=power) (W)	3000	4000	5500	7500
Mode of operation	S3 25%	S3 25%	S3 25%	S3 25%
IP Rating	IP68	IP68	IP68	IP68
HYDRAULICS				
Total manometric head (m)	10	13	18	22
Max. flow rate (m³/h)	120	140	160	165
Inlet diameter DN	150	150	150	150
Discharge diameter DN	100	100	100	100
Ext.ventilation diameter (mm)	100	100	100	100
Total volume (L)	480	480	480	480
Useable volume (L)	270	270	270	270
Passage libre (mm)	80	80	100	100
Max. temperature of the pumped liquid (5 min)	55°C	55°C	55°C	55°C
Type of wheel	Single-channel	Single-channel	Single-channel	Single-channel
Type of activation	Pneumatic	Pneumatic	Pneumatic	Pneumatic
IDENTIFICATION AND LOGISTICS				
Gross weight (kg)	210	220	225	240
EAN code	3308815079035	3308815079042	3308815079059	3308815079066
Factory code	CUBIC1SC3-0T	CUBIC1SC4-0T	CUBIC1SC5-5T	CUBIC1SC7-5T

(DN=nominal diameter)

APPLICATIONS



Individual



Commercial

DISCHARGE

10 to 22 m



WARRANTY



REFERENCES

See table right page



Sanicubic 2 SC



Single-channel impeller



1 inlet DN150 for lifting large volumes of waste water from public buildings or blocks of flats.

Two three-phase pumps.

1 000 litre tank.

Free passage 80 mm or 100 mm.


Control box included (ZPS or PS2).

Start star-delta for the Sanicubic 2 SC7 version. 5T.

Tank customisation on request (tank volume up to 20 000 L and number of inlets).

Optional mounting accessories available.


SEMI-TRANSPARENT VIEW

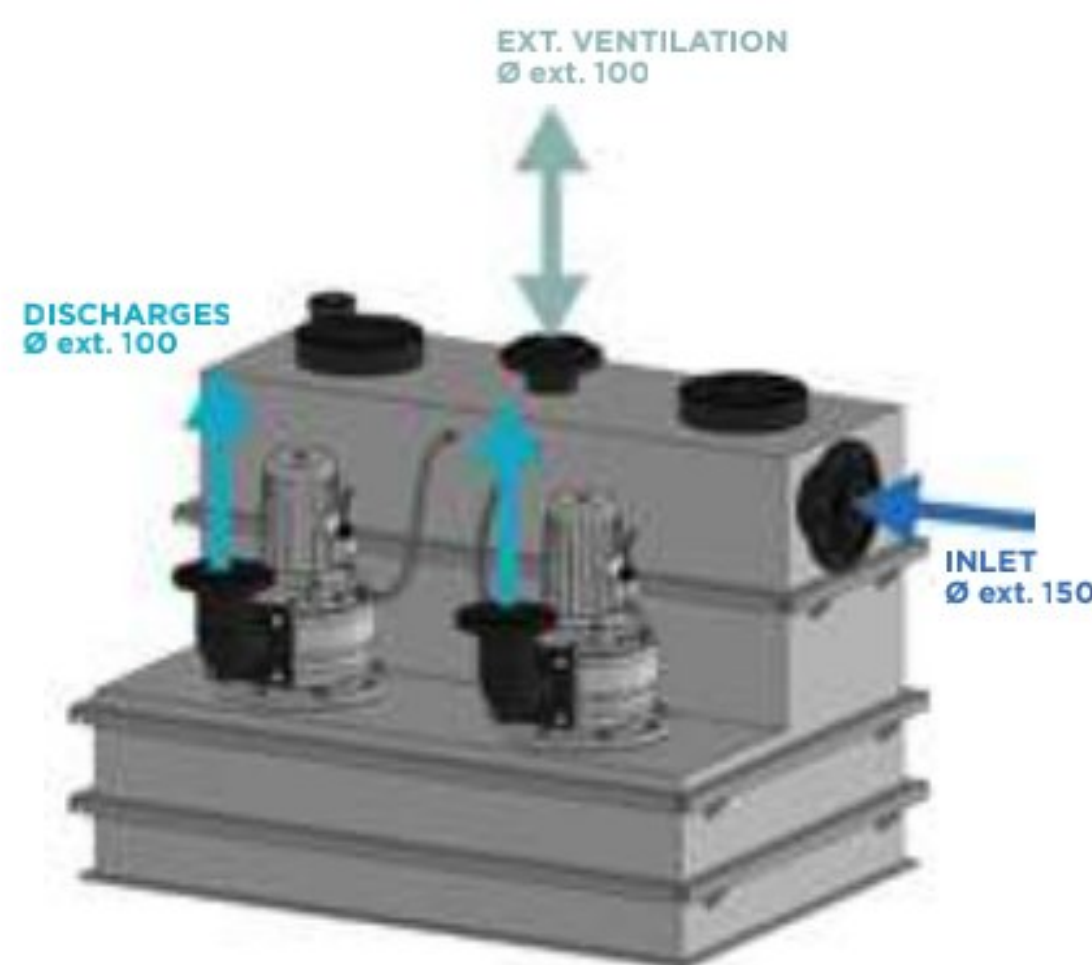

PERFORMANCE

TMH max.	22 m
Max. flow rate	165 m ³ /h

PUMP PERFORMANCE CURVE

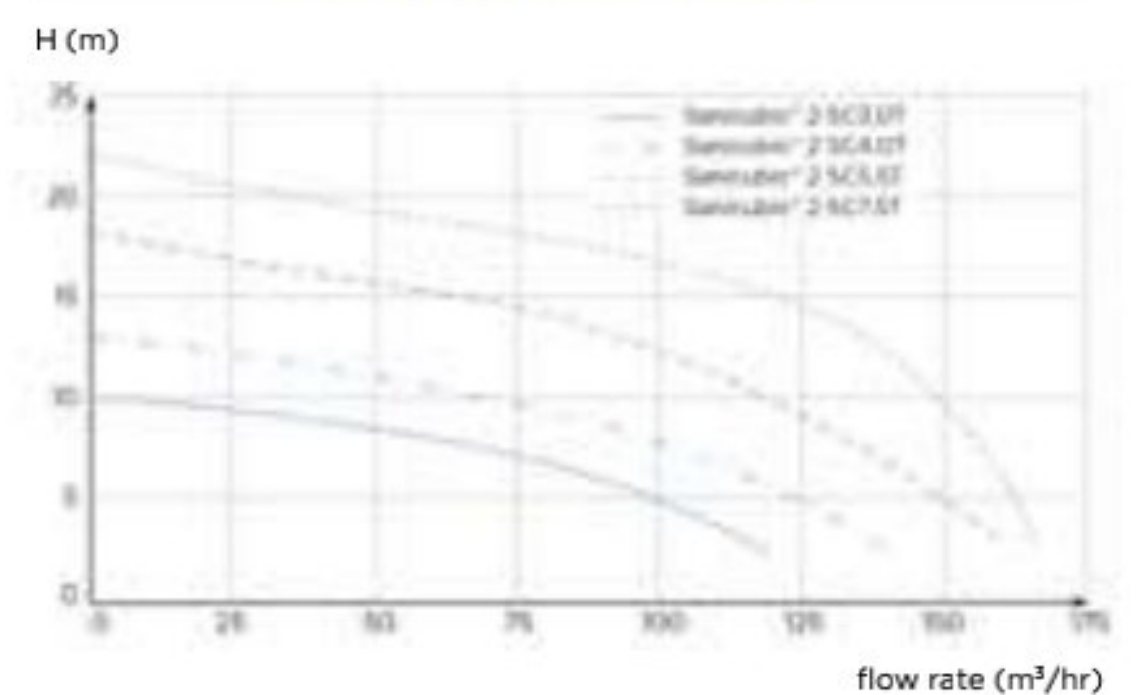

APPLICATIONS



Individual



Commercial

DISCHARGE

10 to 22 m




Control box ZPS - single pump version

Pneumatically controlled remote control box including an audible and visual alarm.



PS2 system box
Depending on model


DIMENSIONS

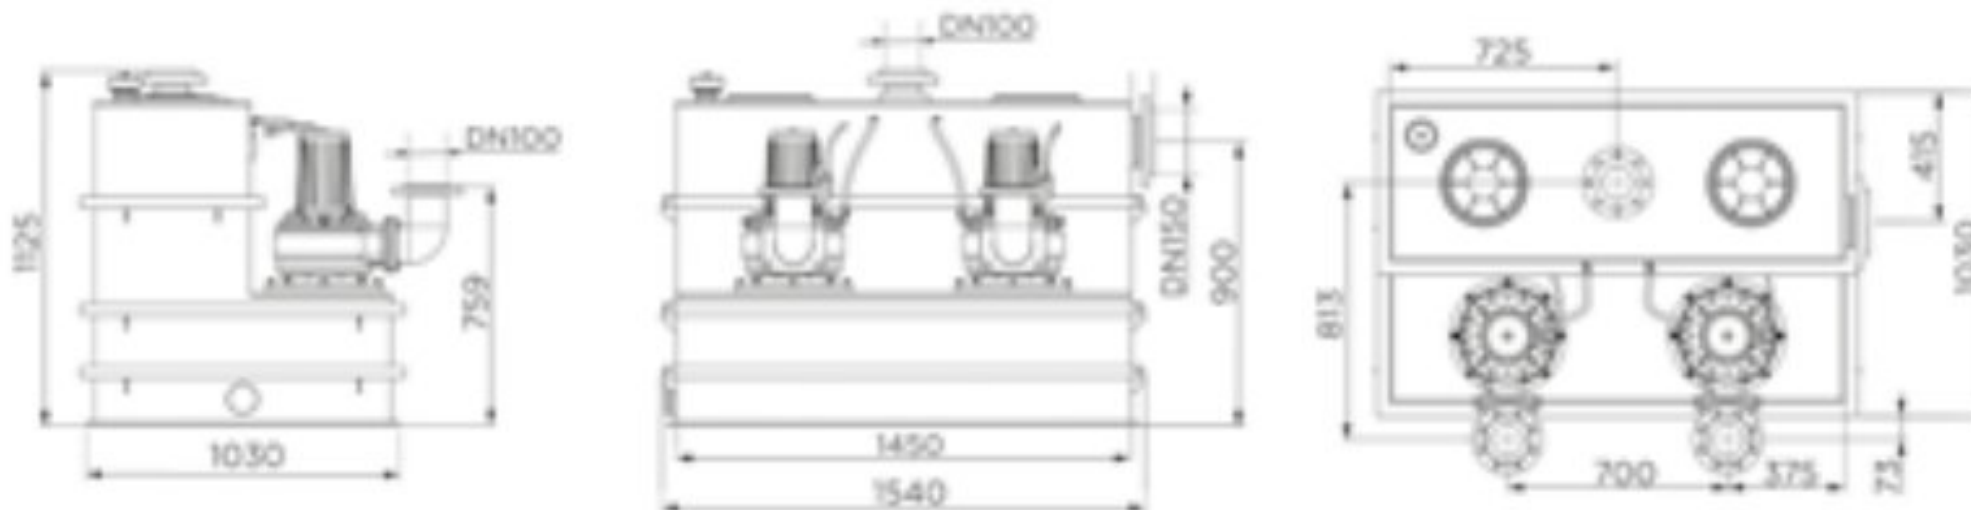


	SANICUBIC 2 SC3.0 T	SANICUBIC 2 SC4.0 T	SANICUBIC 2 SC5.5 T	SANICUBIC 2 SC7.5 T
Type of control box	ZPS 2 case	ZPS 2 case	ZPS 2 case	PS2 System case
MATERIALS				
Tank	PE HD	PE HD	PE HD	PE HD
Pump housing	GG-20	GG-20	GG-20	GG-20
Motor housing	GG-20	GG-20	GG-20	GG-20
Impeller	GG-20	GG-20	GG-20	GG-20
ELECTRICALS FEATURES				
Voltage (V)	400	400	400	400
Frequency (Hz)	50-60	50-60	50-60	50-60
Power consumption P1 (P=power) (W)	4000	5500	6300	8700
Power output P2 (P=power) (W)	3000	4000	5500	7500
Mode of operation	S3 25%	S3 25%	S3 25%	S3 25%
IP Rating	IP68	IP68	IP68	IP68
HYDRAULICS				
Total manometric head (m)	10	13	18	22
Max. flow rate (m³/h)	120	140	160	165
Inlet diameter DN	150	150	150	150
Discharge diameter DN	100	100	100	100
Ext.ventilation diameter (mm)	100	100	100	100
Total volume (L)	1000	1000	1000	1000
Useable volume (L)	500	500	500	500
Passage libre (mm)	80	80	100	100
Max. temperature of the pumped liquid (5 min)	55°C	55°C	55°C	55°C
Type of wheel	Single-channel	Single-channel	Single-channel	Single-channel
Type of activation	Pneumatic	Pneumatic	Pneumatic	Pneumatic
IDENTIFICATION AND LOGISTICS				
Gross weight (kg)	370	385	400	425
EAN code	3308815079073	3308815079080	3308815079097	3308815079103
Factory code	CUBIC2SC3-0T	CUBIC2SC4-0T	CUBIC2SC5-5T	CUBIC2SC7-5T

(DN=nominal diameter)

Sanicom 1

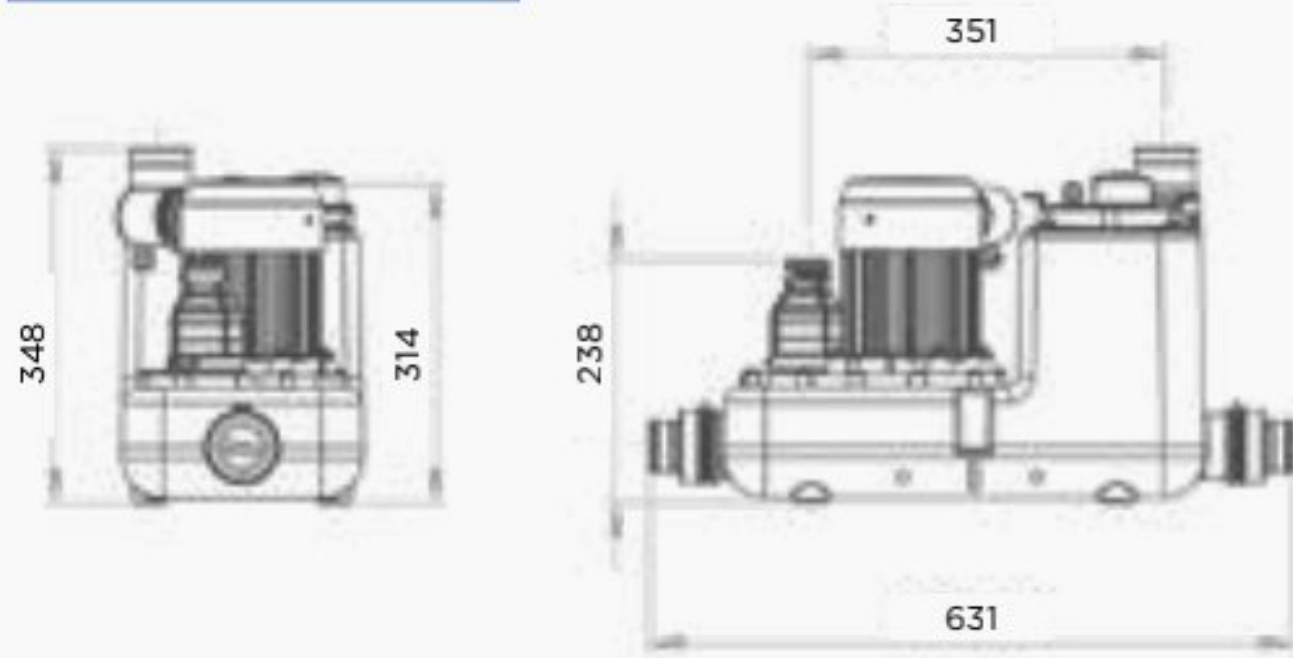


Sanicom 2

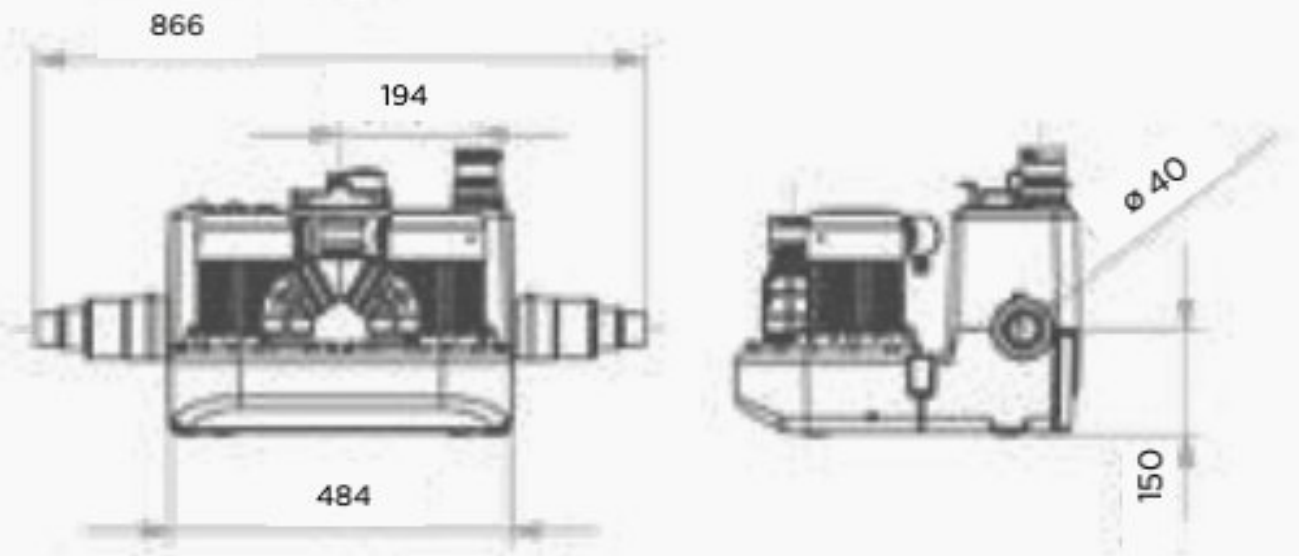


Sanicubic 1


Sanicubic 1 WP

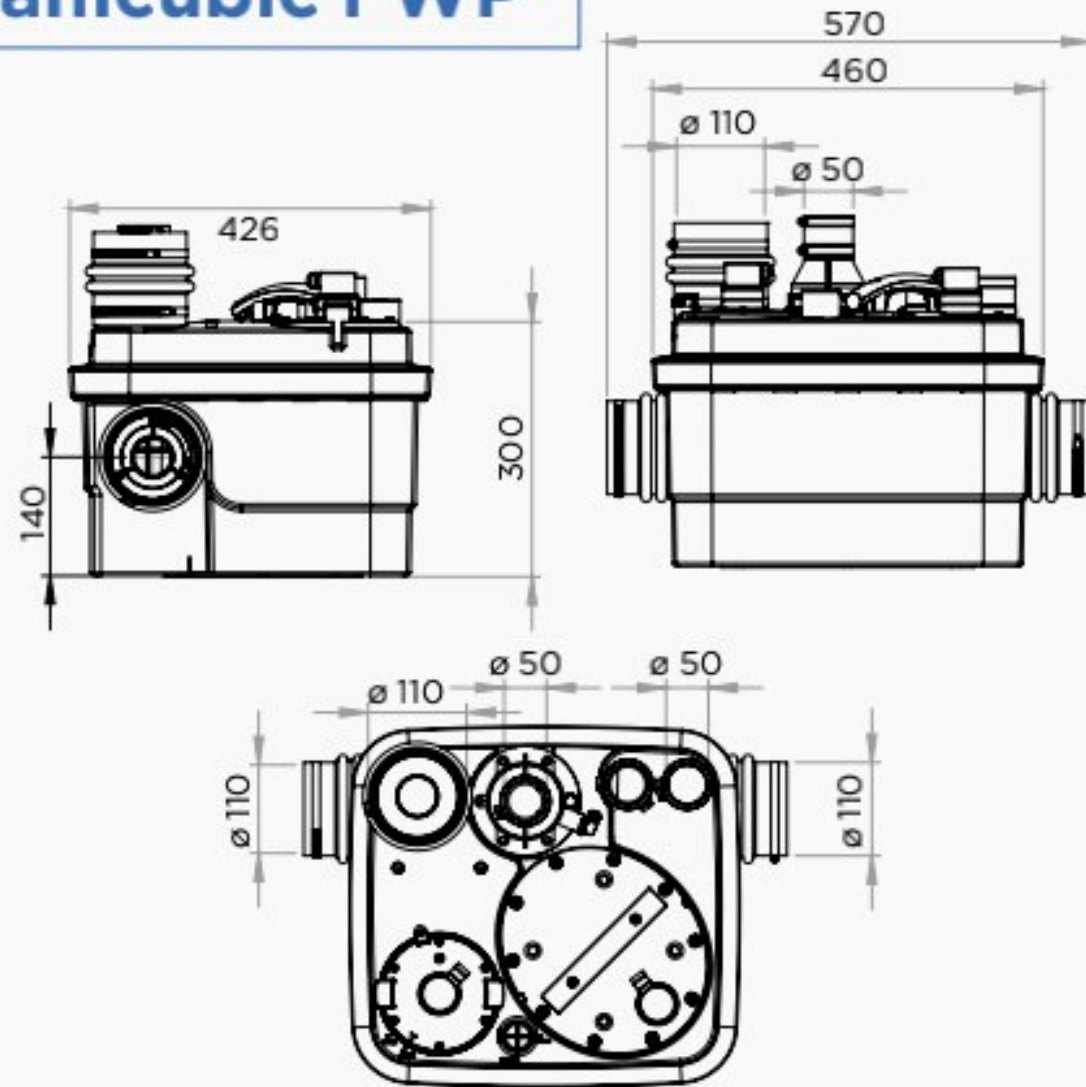


Sanicubic 1 VX

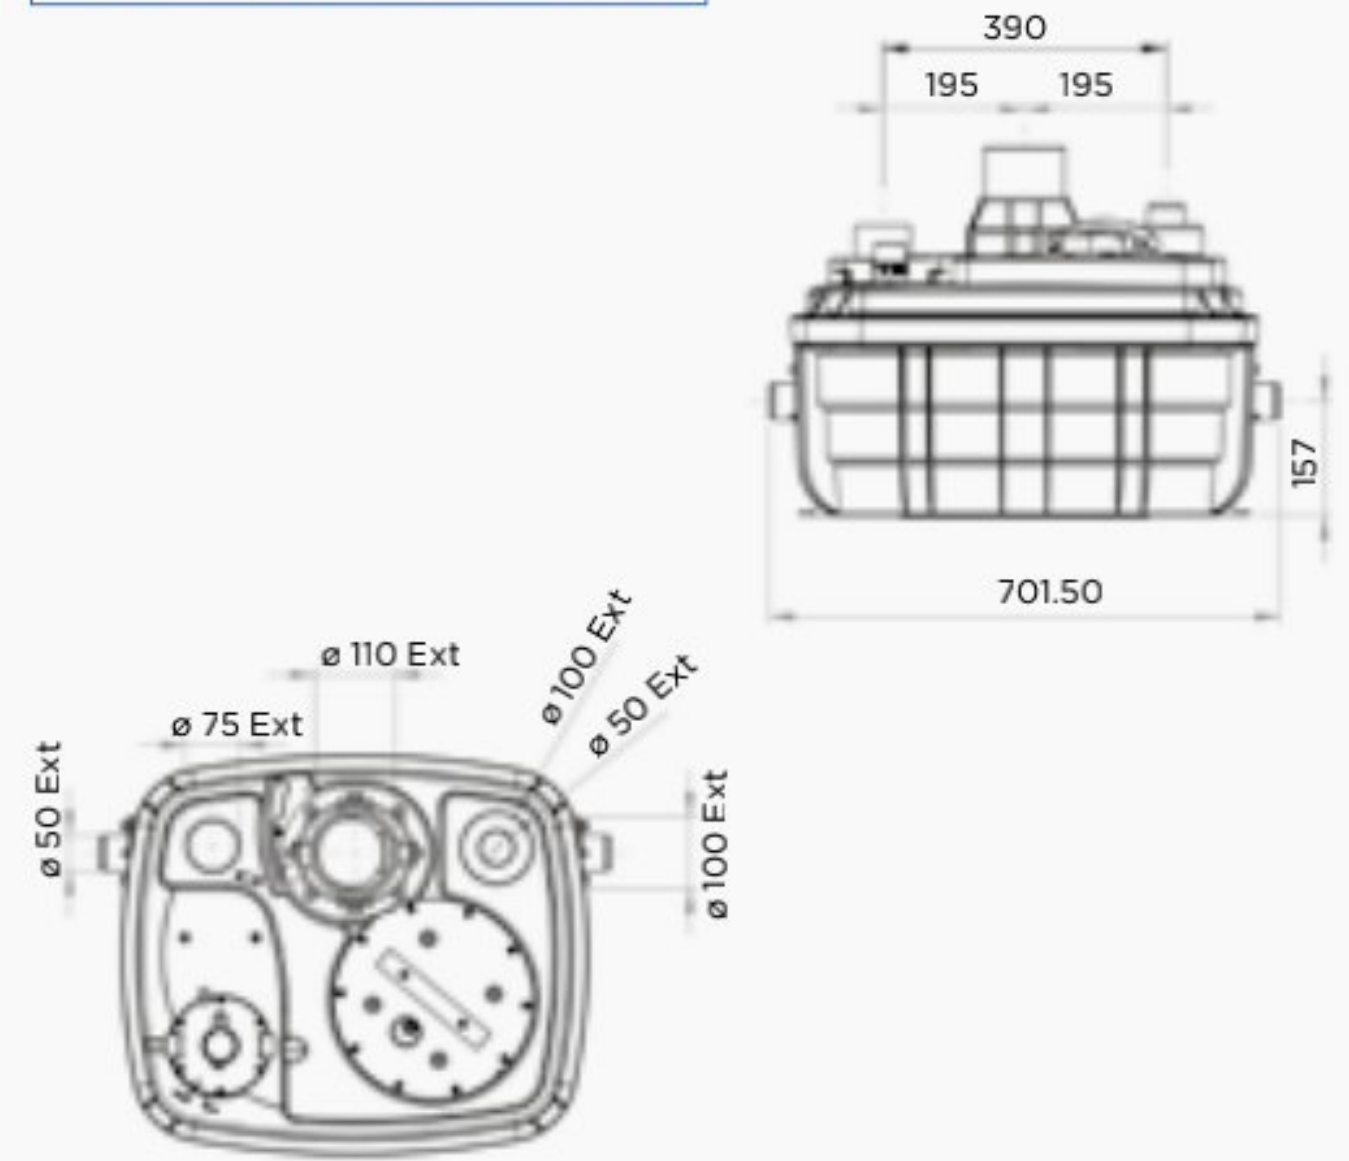

Sanicubic 2 Classic / Sanicubic 2 Pro

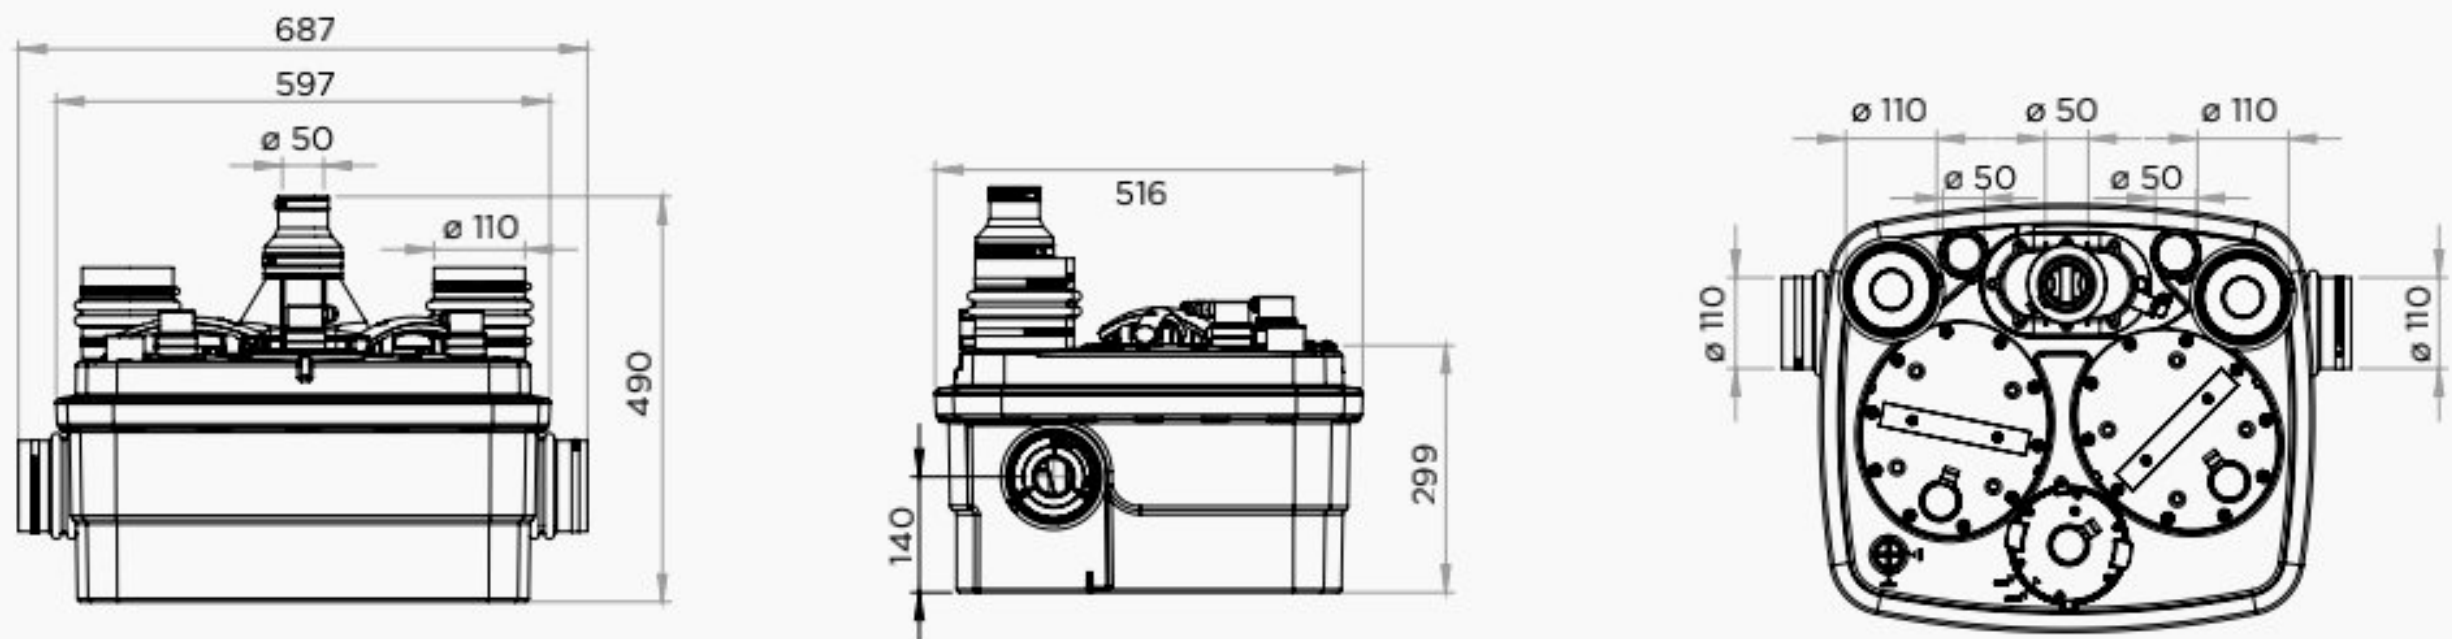

Sanicubic 2 VX Single-phase / Sanicubic 2 VX Three-phase

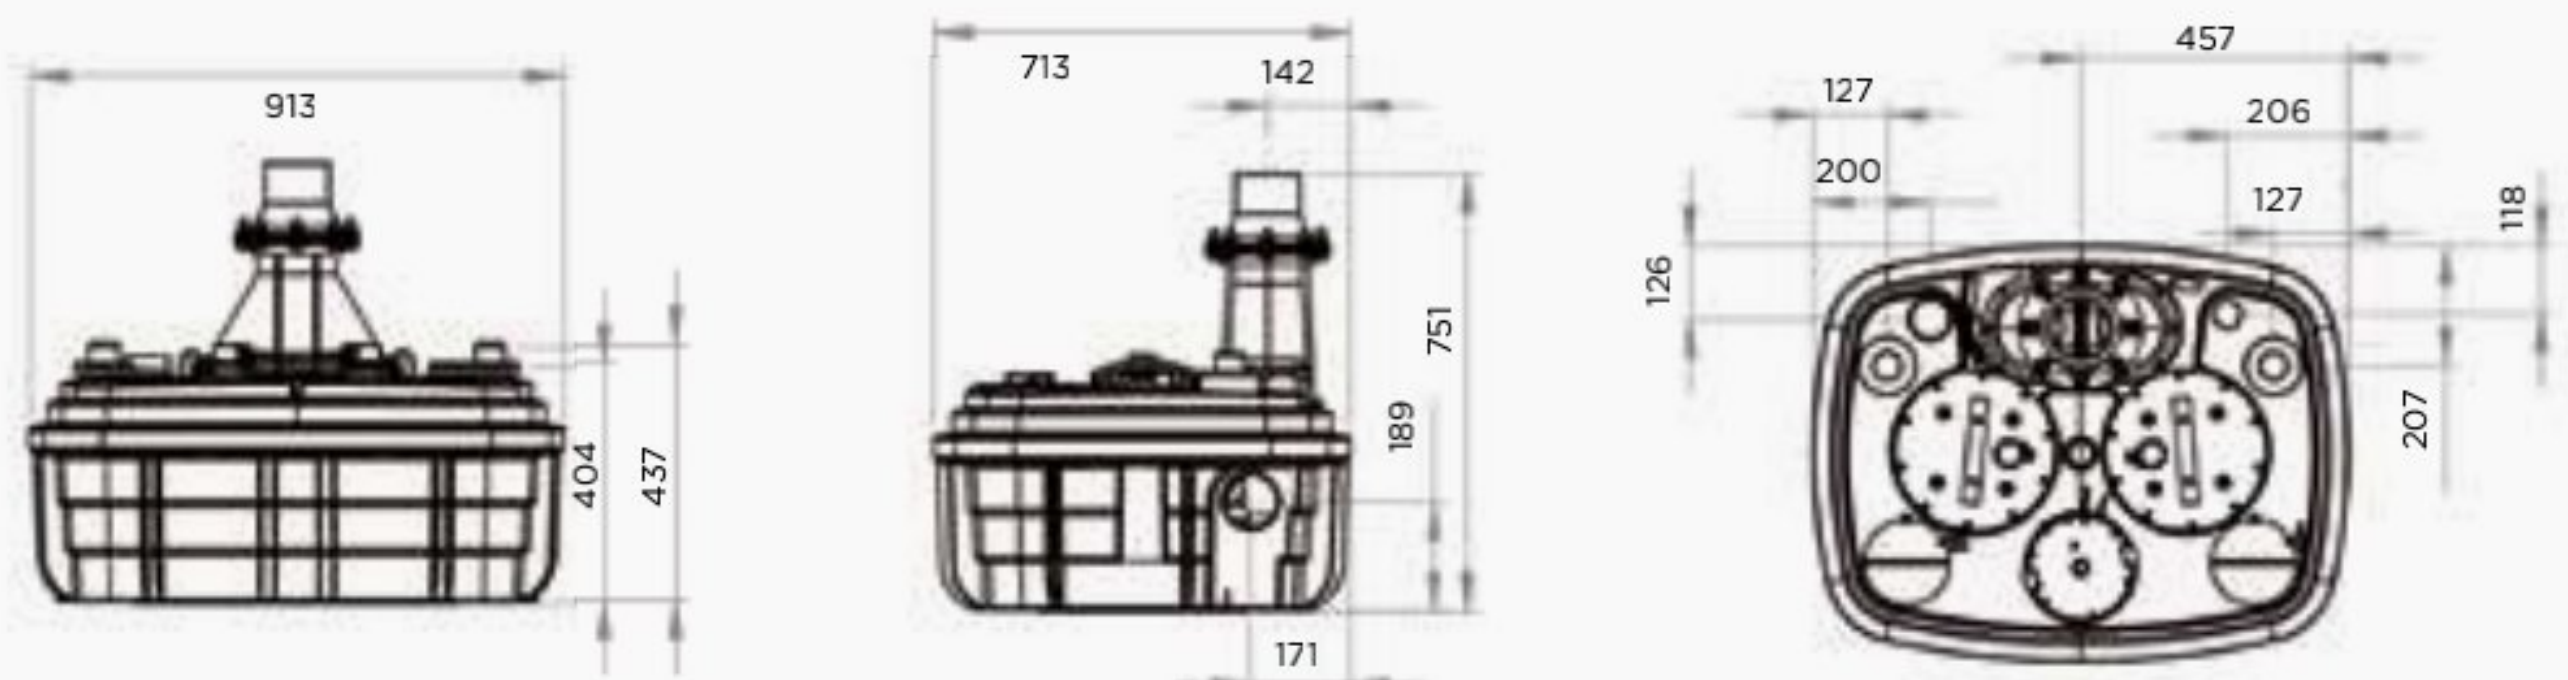

Sanifos

underground lifting station

SOME INSTALLATION TIPS

1

TYPE OF SOIL

Before installing an underground lifting station, it is essential to be fully aware of the soil type. Sanifos lifting stations can also be installed inside the home, in a floor standing position.

2

WHERE TO INSTALL YOUR LIFTING STATION?


Sanifos lifting stations have an incoming water flow height of 182 mm to 2,450 (and of 2,940 mm with the extension), allowing for installation at various distances from the house.

3

WHY DOES YOUR STATION NEED GOOD VENTILATION?

Ventilation must be installed in the upper part of the station for it to operate correctly.

- drain the gases that gather inside the tank
 - avoid depressurising the stations
- To do this, the lifting stations have ventilation openings.

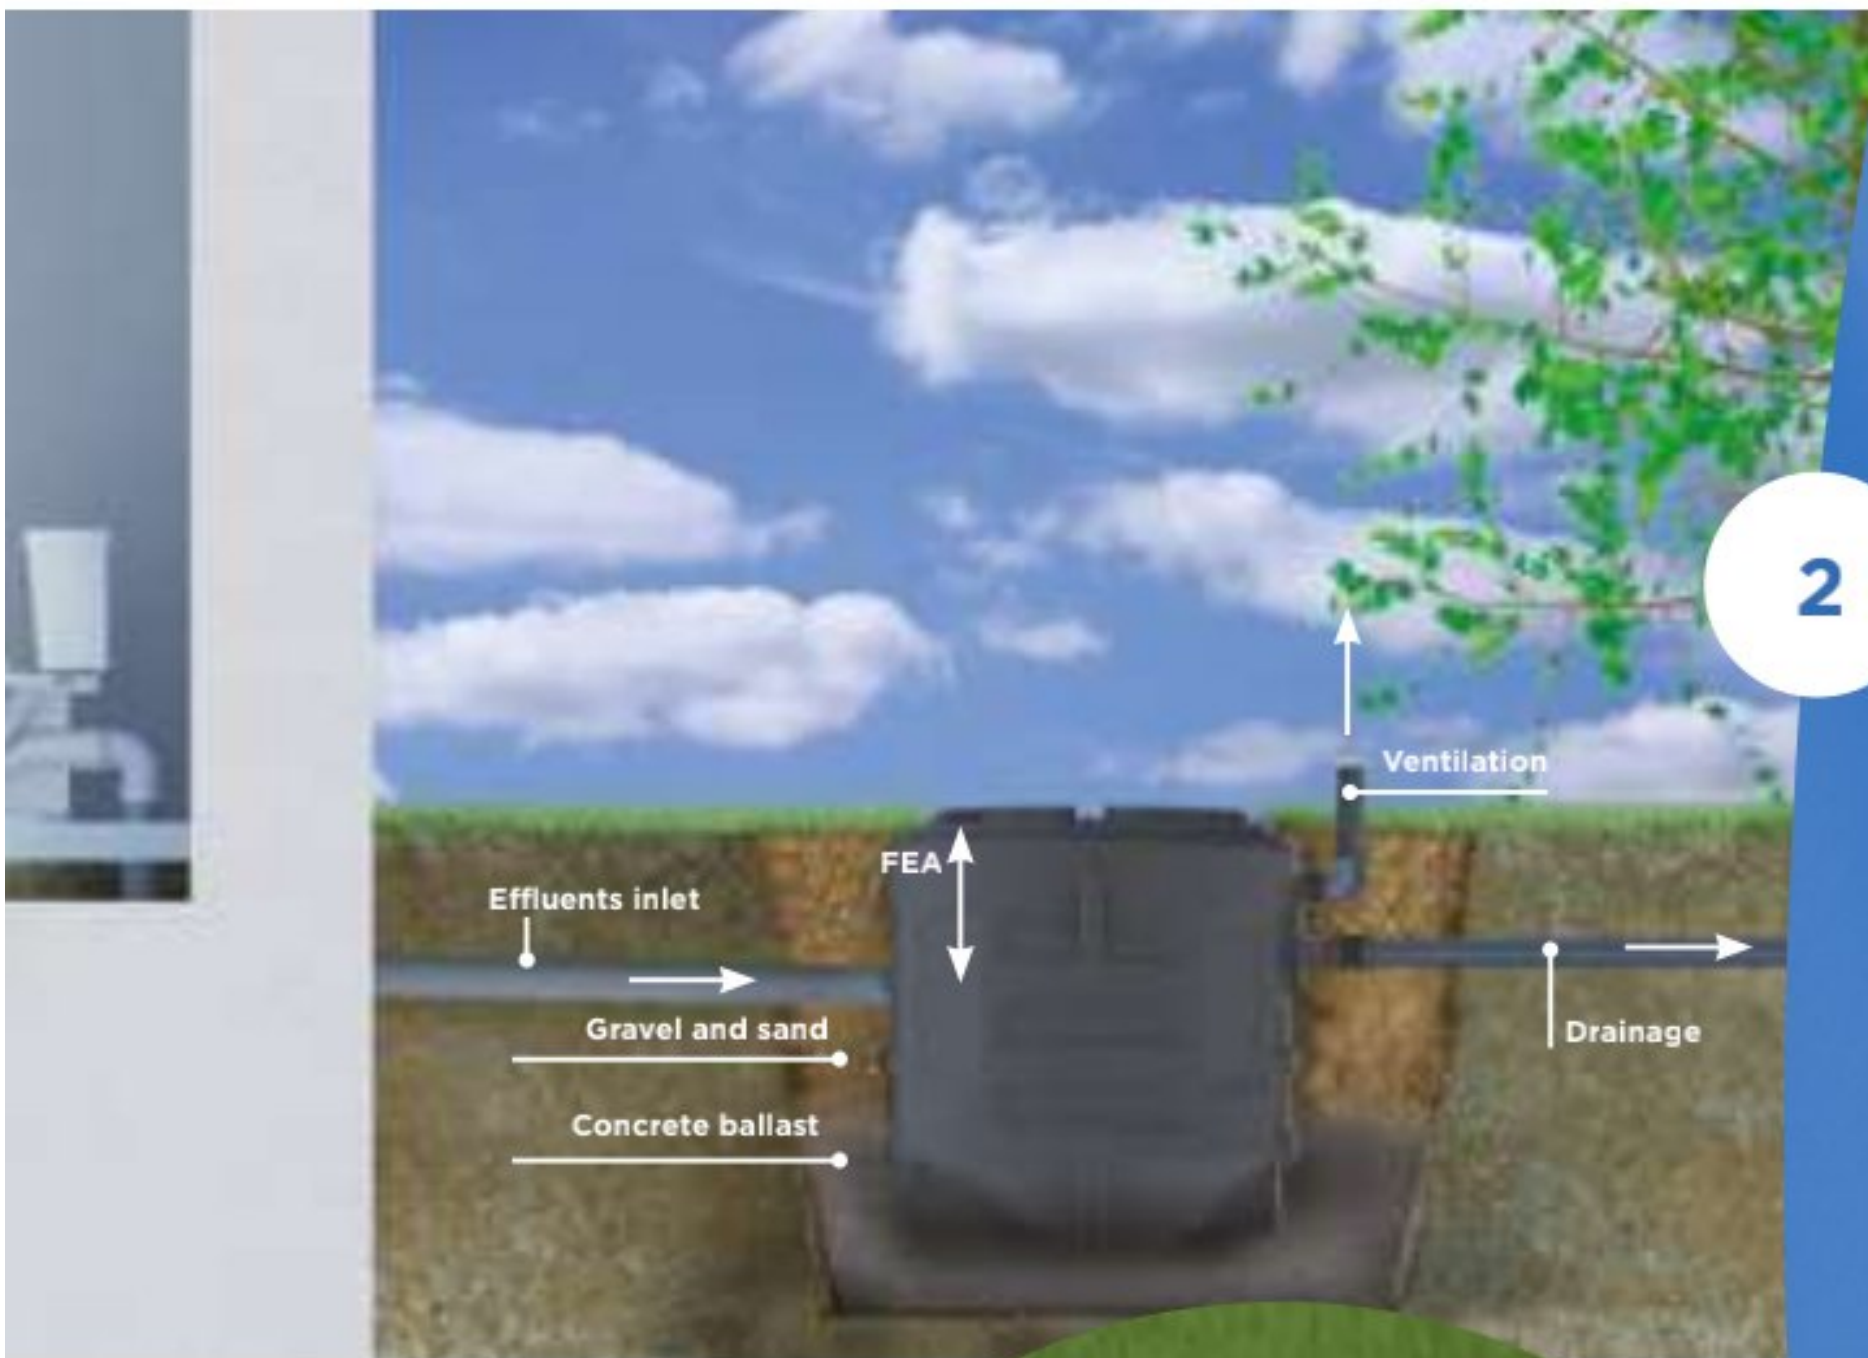

DIFFERENT FACTORS MUST BE CONSIDERED AND COMPLIED WITH DURING THE INSTALLATION OF THE SANIFOS UNDERGROUND LIFTING STATION.

Standards : Our devices comply with the EN12050-1 standards of lifting stations for all waters and must be installed following the recommended guidelines of the EN 12056-4 and EN 752-6 standards.

*For accurate technical information, please refer to the installation instructions and professional standards or seek advice from our technical service.

WHY SANIFOS?

Sanifos - for reliable pumping.

In addition to its Sanicubic floor standing lifting stations, SFA also offers a wide range of Sanifos underground lifting stations:

- 1 PUMP AND 2 PUMP MODELS
- SINGLE-PHASE AND THREE-PHASE MODELS
- GRINDER, VORTEX AND TWO-CHANNEL MODELS

These stations meet diverse requirements such as individual, commercial or small collective use.

ADVANTAGES OF SANIFOS LIFTING STATIONS

Reliability

- Rotation-moulded polyethylene high-density tank with high mechanical resistance, anti-odour, resistant to chemical attacks and UV rays.
- Thermal motor protection.

Flexibility

- Several inlets of various diameters available.
- Ventilation openings.

Easy installation and maintenance

- Station delivered fully equipped (pre-assembled hydraulic connections with gate valves and check valve).
- Cable gland for cable passage.
- Chain supplied as standard for pump output.
- Control unit included with Sanifos models with 2 pumps.
- Watertight terminal blocks supplied as standard (Sanifos 610 and 1300 models).





Underground lifting stations

To save space in the house, and for discreet operation, SFA offers a full range of underground lifting stations: Sanifos. With a macerator or vortex, one pump or two, single-phase or three-phase motors, this range meets every need.

Product	Connected pump		Grey water	Black-water	Rainwater	Max. TDH(m)	Max. Q (m ³ /hr)
Sanifos 110 110 L tank	p.105 Sanipump GR p.104		✓	✓		14	11
Sanifos 280 280 L tank	p.106 Sanipump GR p.104		✓	✓		14	11
	Sanipump VX p.104		✓	✓		13	26
Sanifos 610 610 L tank	Sanipump GR p.104		✓	✓		14	16
	p.108 Sanipump VX p.104		✓	✓		16.7	28
	NEW Sanipump SLD p.112		✓		✓	13.7	35
Sanifos 1300 1300 L tank	p.110 Sanipump GR p.104		✓	✓		12	17
	Sanipump VX p.104		✓	✓		17	33

Underground pumps

Underground pumps	p.114 Sanipump ZPG 71		✓		✓	31	43
	p.116 Sanipump ZFS 71		✓	✓		39	17

APPLICATIONS



Individual

DISCHARGE

14 m



WARRANTY



REFERENCES

Sanipump
Single-phase
Grinder
EAN 3308815074610
POMPIMMERGE

Sanipump
Single-phase
Vortex
EAN 3308815076201
POMPIMMERGEVORTEX



Sanipump Vortex installed in a sump

Sanipump



Wastewater pumping

Easy installation:
Lightweight: only 13 kg. Compactness, stability.



Autonomous
pump operation.

Float activation system
Max. temperature of incoming water: 70°C

TECHNICAL FEATURES

Discharge diameter ext.	DN 40 (GR) DN 50 (VX)
ON/OFF level	400/100
Voltage	230 V / 50-60 Hz
Consumption	1500 W
Immersion depth	5 m

PERFORMANCE

Sanipump GR (grinding)


Max. flow	11 m ³
Max. height	14 m

Sanipump VX (Vortex)


Max. flow	27 m ³
Max. height	13 m

DIMENSIONS

Sanipump Vortex

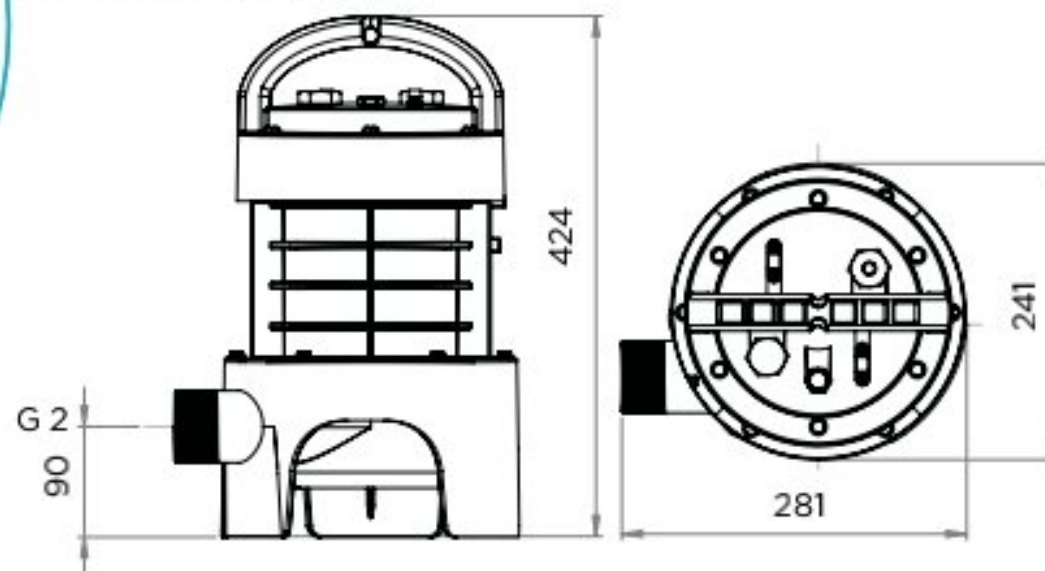

Sanipump Grinder

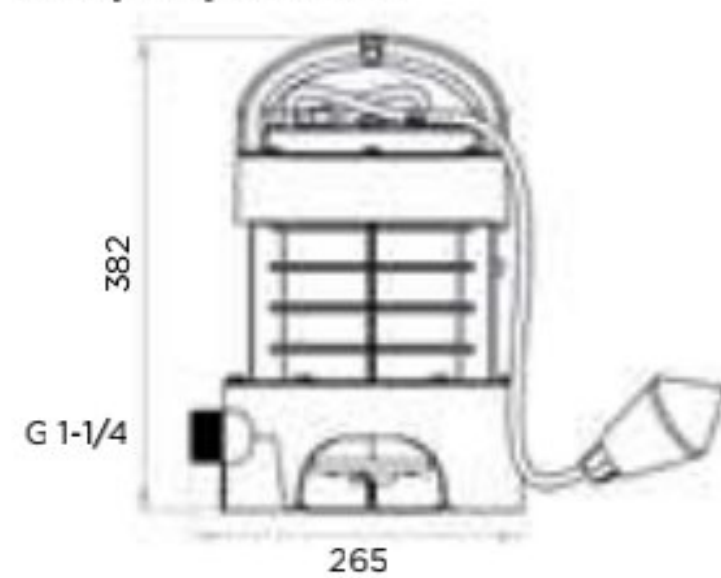

GRINDER OR VORTEX MODEL



KX V6 Vortex
Wheel



Pro X K2
knife

PUMP PERFORMANCE CURVES





APPLICATIONS



DISCHARGE

14 m
↑

WARRANTY



REFERENCE

Sanifos 110
EAN 3308815079318
SANIFOS110P

Sanifos 110



Wastewater pumping station,
single-phase model.

SFA PPro X K2 grinding system: less risk of clogging.

Easy handling thanks to the screw cap.




Automatic
pump operation.

Complete drainage kit
available as an option.


4 inlets for greater
flexibility of installation



1-PUMP PUMPING STATION

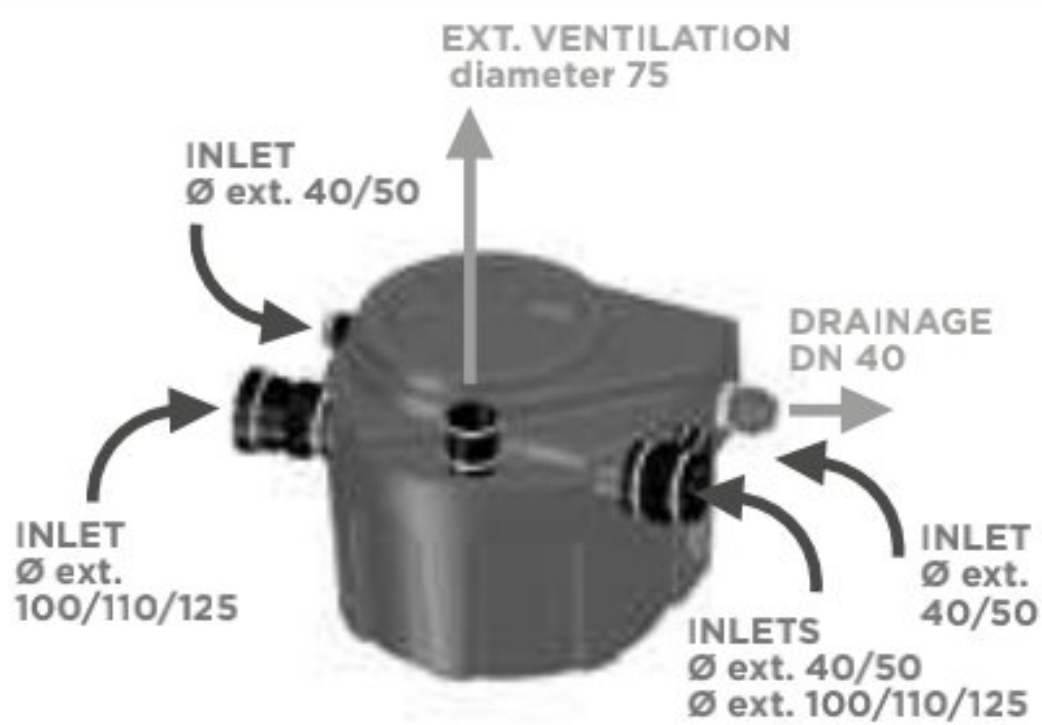

PUMP PERFORMANCE CURVE

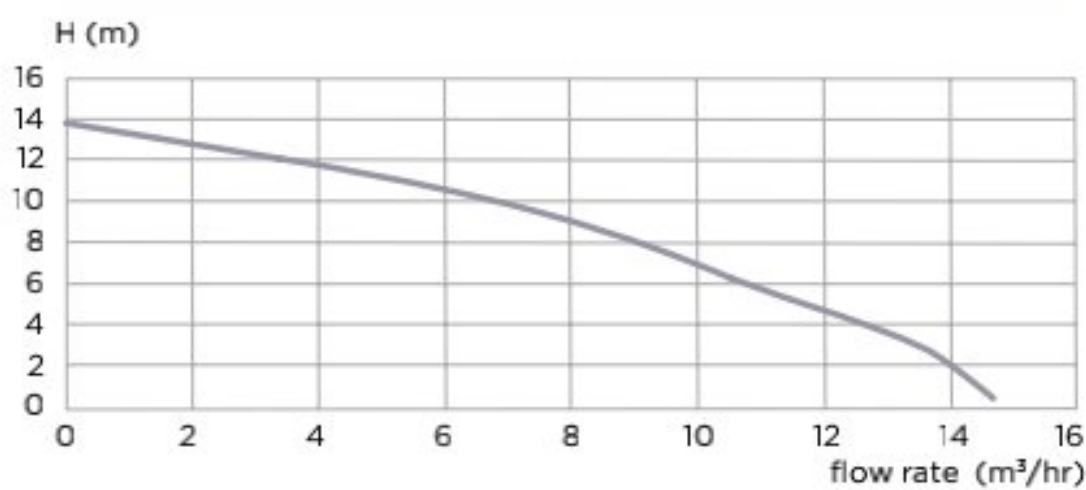

PACKING LIST

- Tank with pre-assembled hydraulics and watertight seal
- Submersible pump with float switch
- Cable gland

Find all the product dimensions on pg.106

TECHNICAL FEATURES

TANK	
Tank volume	110 L
Material	Polyethylene
Ø of ext. inlets	2 x 100, 110 mm 2 x 40, 50 mm
Discharge diameter ext.	50 mm
Ventilation diameter	1 x Ø ext. 75
Maximum temperature of incoming wastewater	70°C intermittently (max. 5 min)
Water inlet (FEA)	182 mm
Wheel type	Grinder
PERFORMANCE	
Activation system	Float
ON/OFF level	320/120 mm
Voltage	220-240 / 50 Hz
Consumption	1500 W
Max. absorbed thermal intensity	6 A
Thermal overload protection	Yes
Station weight	40 kg

PERFORMANCE

Max. flow	11 m³/hr
Max. height (Q = 0 m³/hr)	14 m
Max. recommended height	11 m



Pro X K2 knife



DRAINAGE KIT REFERENCE
EAN 3308815077024
KITEVACSANIFOS110



APPLICATIONS



Individual



Commercial

DISCHARGE

14 m



WARRANTY



REFERENCE

Sanifos 280

Grinder

EAN 3308815083117

SANIFOS280GRS



Optional remote unit for wired alarm and float to attach inside the tank



Pro X K2 knife



30 cm extension Sanifos 280
FEA: 500-900 mm
REFERENCE
EAN 3308815081298
RO250239



Sanifos 280



Underground pumping station for wastewater, single-phase version, Grinder or Vortex pump, supplied fitted.

Extension accessory available for greater installation flexibility.



Automatic pump operation.
Self-cleaning tank bottom.

Adjustable water inlet: 3 zones for customised drilling.



APPLICATIONS



DISCHARGE

13 m
↑

WARRANTY




REFERENCE

Sanifos 280 Vortex
EAN 3308815081304
SANIFOS280VORTEX

PACKING LIST

- Tank with pre-assembled hydraulics, gate valve and check valve
- Submersible pump with float switch
- Remote alarm
- Handling chain, IP68 terminal block, cable gland

PUMP PERFORMANCE CURVES

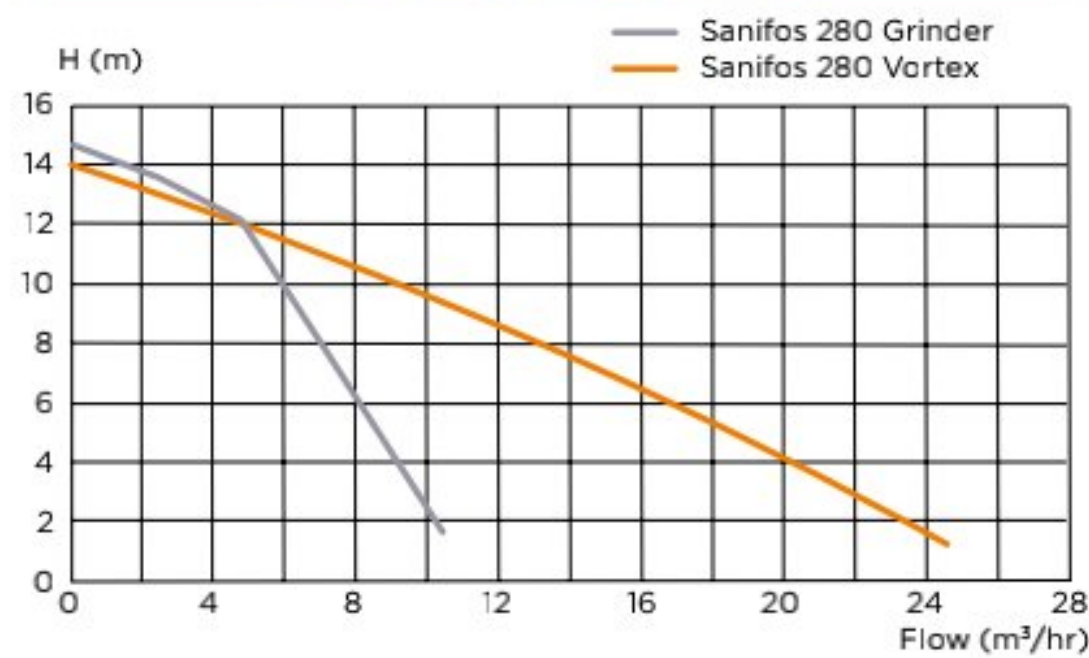

TECHNICAL FEATURES

	Sanifos 280 Grinder	Sanifos 280 Vortex
Tank volume	280 L	
Material	Polyethylene	
Ø of ext. inlets	50, 100 mm	
Discharge diameter ext.	50 mm	63 mm
Ventilation diameter	2 x Ø ext. 75	
Maximum temperature of incoming wastewater	70°C intermittently (max. 5 min.)	
Water inlet (FEA)	250 mm (550 mm with extension)	
Wheel type	Grinder	Vortex
Activation system	Float	
ON/OFF level	400/100 mm	
Voltage	220-240 / 50 Hz	
Consumption	1,500 W	
Max. absorbed intensity	6 A	
Thermal overload protection	Yes	
Station weight	55 kg	

PERFORMANCE

	Sanifos 280 Grinder	Sanifos 280 Vortex
Max. flow	11 m³/hr	27 m³/hr
Max. height (Q = 0 m³/hr)	14m	13m
Max. recommended height	11 m	11 m (DN 50)



Optional remote unit for wired alarm and float to attach inside the tank



KX V6 Vortex wheel system



30 cm extension Sanifos 280 FEA: 500-900 mm
REFERENCE
EAN 3308815081298
RO250239



APPLICATIONS



Individual



Commercial



Collective

DISCHARGE

14 m



WARRANTY



1 PUMP REFERENCES

1. Sanifos 610
Single-phase dual
channel
EAN 3308815084145
SANIFOS610ISLD700SA

2. Sanifos 610
Single-phase Grinder
EAN 3308815081687
SANIFOS610IGRSPS

3. Sanifos 610
Single-phase Vortex
EAN 3308815083094
SANIFOS610VXSPPS



Optional remote unit
for wired alarm
and float to attach
inside the tank



NEW
2021

Sanifos 610 Single-phase Sanifos 610 Three-phase



1 or 2-pump pumping station for wastewater,
single-phase or three-phase model, grinder or
Vortex pump, supplied fitted.

1 or 2 pump two-channel model for rainwater,
single-phase or three-phase.

Extension accessory available for greater
installation flexibility.

Energy saving and limited pump use thanks to high
usable capacity.

IP 68 waterproof terminal blocks supplied as
standard.



2 alternating pumps for more intensive use.

Self-cleaning tank bottom.

Supplied with its unit (2 pump version): interactive
and smart station monitoring system.

SFA Connection mobile application
available with the SMART option
compatible with single-phase
dual pump models (see pg. 109).



Sanifos 610 grinder
2 pumps



Sanipump SLD 700
2 pump three-phase

WHEELS



KX V6 Vortex wheel system





Prox K2 knife



Two-channel wheel system

PUMP PERFORMANCE CURVE

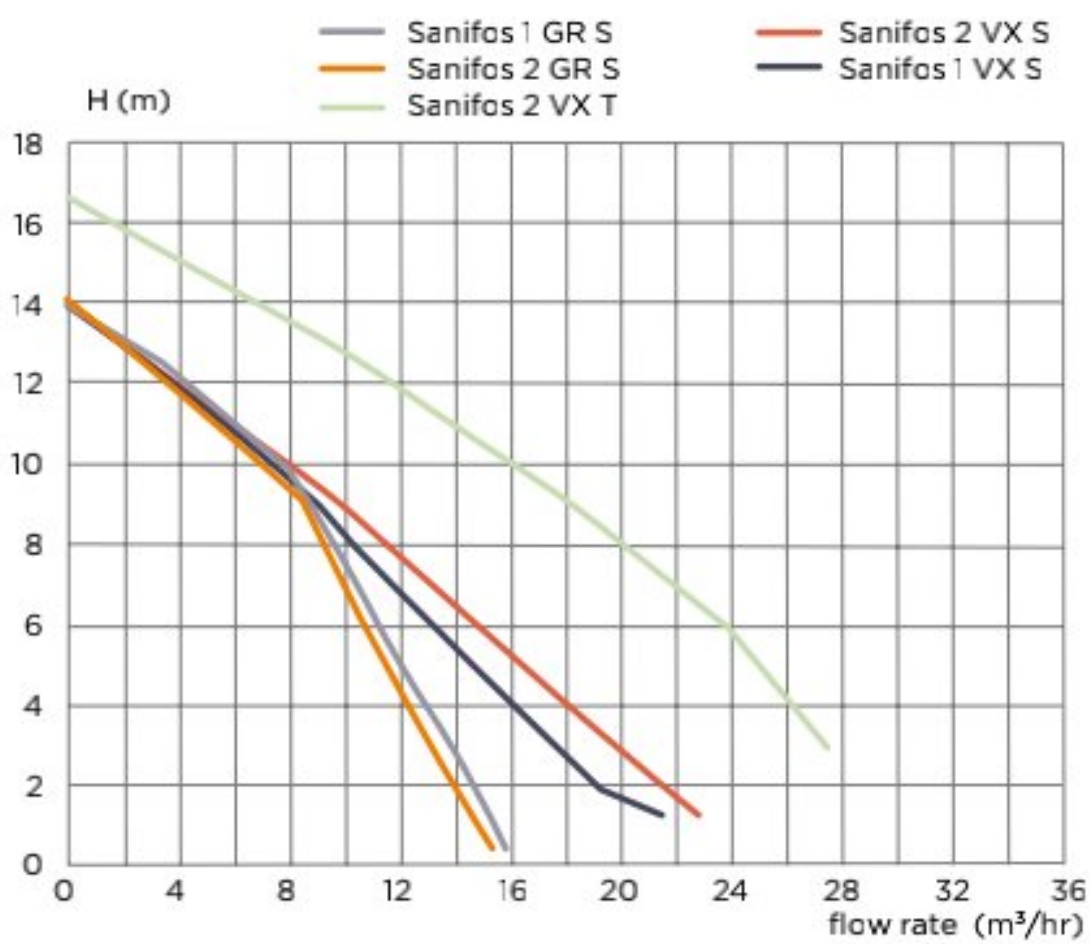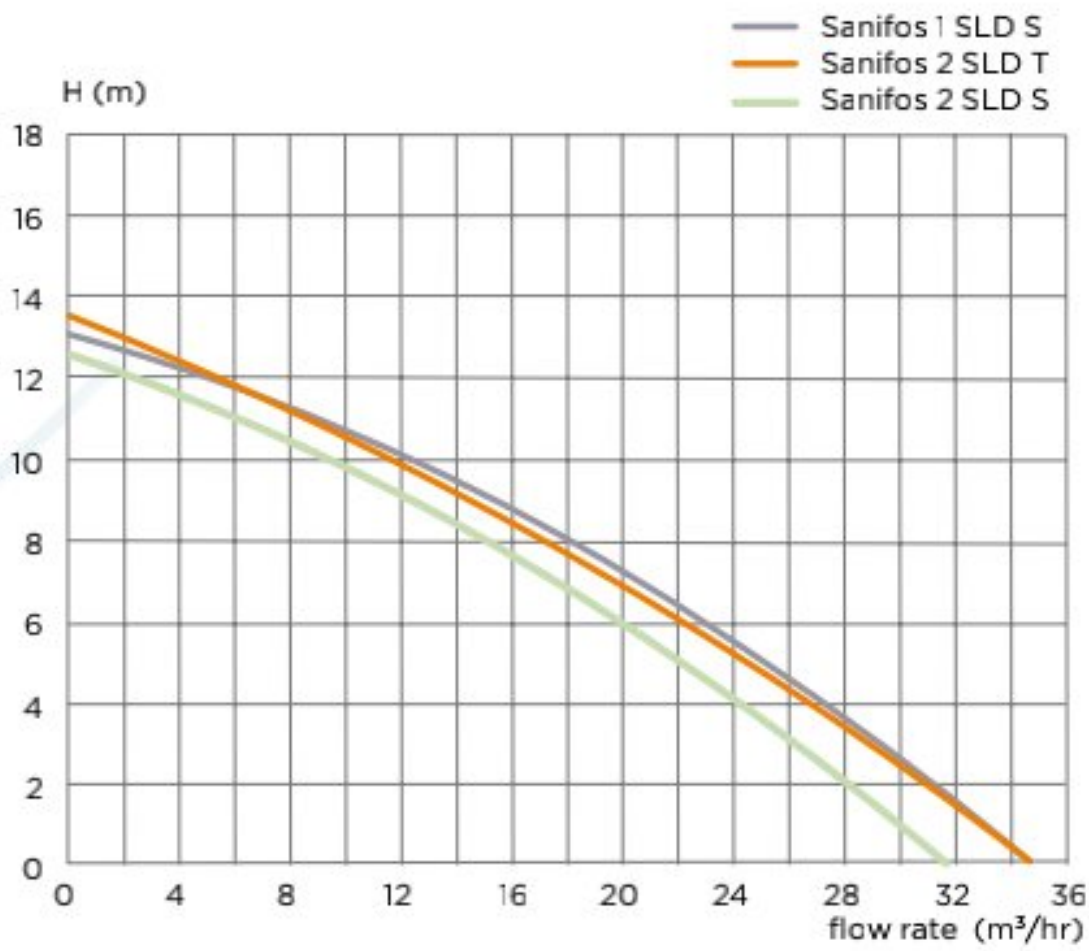

EXTENSION



40 cm extension
Sanifos 610
FEA:
- 2 pump: 725 - 1,010 mm
- 1 pump: 725 - 980 mm
Reference:
EAN 3308815077826
RO250100

PACKING LIST

Tank with pre-assembled hydraulics, 2 gate valves, 2 check valves and 3 floats installed inside the tank


1 or 2 submersible pumps

Handling chains, cable glands, waterproof terminal blocks

SMART control unit (2 pump version only)

Remote alarm unit

2 MOTOR SMART SYSTEM

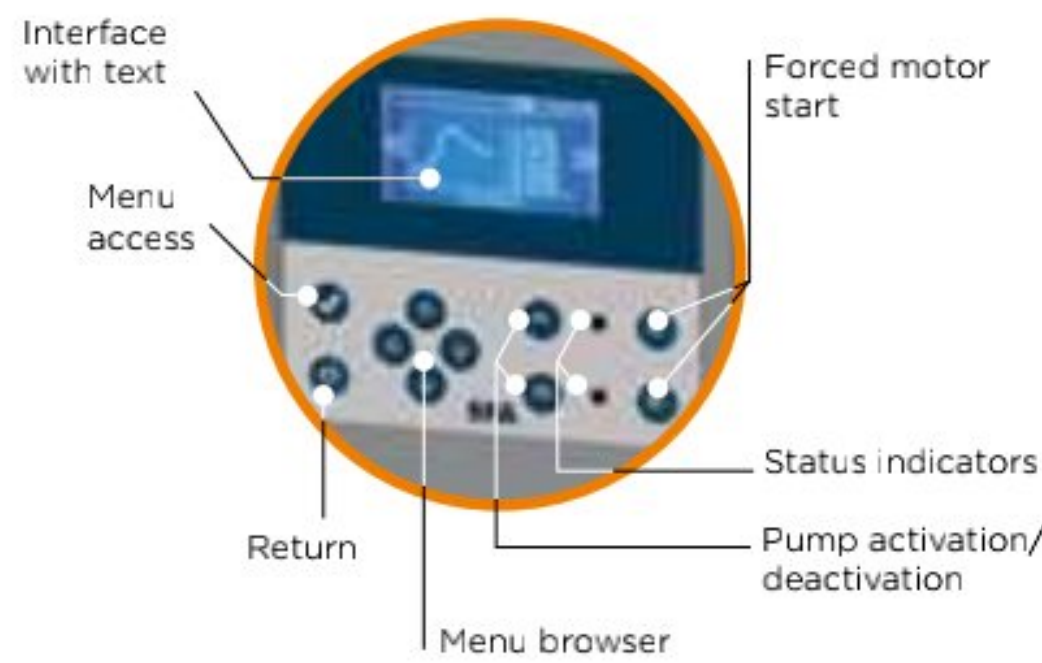

TECHNICAL FEATURES

	Two-channel		Grinder	Vortex	
	Single-phase	Three-phase	Single-phase	Single-phase	Three-phase
	1 pump (model n°1) or 2 pumps (model n°4)	2 pumps (model n°5)	1 pump (model n°2) or 2 pumps (model n°6)	1 pump (model n°3) or 2 pumps (model n°7)	2 pumps (model n°8)
TANK					
Tank volume	612 l				
Material	Polyethylene				
Inlet diameter	6 ext. inlets ø 50/100				
Discharge pipe diameter	DN 50 (ext. 63)		DN 40 (ext. 50)		DN 50 (ext. 63)
Ventilation	1 x Ø ext. 75				
Maximum temperature of incoming wastewater	70°C intermittently (max. 5 min)				
Flow	35 m³/hr 1 pump, 32 m³/hr 2 pumps	35 m³/hr 2 pumps	16 m³/hr	21 m³/hr	28 m³/hr
Max. height (Q = 0 m³/hr)	13.5 m 1 pump, 13 m 2 pumps	13.7 m³/hr 2 pumps	14 m		16.7 m
Max. recommended height	12 m (DN 50)		11 m	11 m (DN 50)	15 m (DN 50)
ON/OFF level	1 pump 560/390 mm or 2 pumps 470/50 mm		1 pump 500/140 mm or 2 pumps 470/50 mm		
Water inlet (FEA)	FEA: 325 - 580 mm (with extension: 725 mm)				
Voltage	230 V/50-60 Hz	400 V/50-60 Hz	230 V/50-60 Hz	400 V/50-60 Hz	
Consumption (W)	1,100 W		1,500 W	2,800 W	
Thermal overload protection	Yes				
Activation system	Float				
Check valve	1 or 2	2	1 or 2	2	
Max. absorbed intensity	1 x 9.2A or 2 x 9.2A	2 x 3.3A	1 x 6A or 2 x 6A	2 x 6A	
Station weight	1 pump: 85 kg or 2 pumps: 120 kg		1 pump: 68 kg or 2 pumps: 88 kg		
PUMP					

APPLICATIONS



DISCHARGE

17 m ↑

WARRANTY



2 PUMP REFERENCES

4. Sanifos 610
Single-phase two-channel
EAN 3308815084152
SANIFOS6102SLD700S

5. Sanifos 610
Three-phase two-channel
EAN 3308815084169
SANIFOS6102SLD700T

6. Sanifos 610
Single-phase Grinder
EAN 3308815083087
SANIFOS6102GRSPS

7. Sanifos 610
Single-phase Vortex
EAN 3308815083100
SANIFOS6102VXSPS

8. Sanifos 610
Three-phase Vortex
EAN 3308815081663
SANIFOS6102VXSPT



Smart control unit



Remote alarm unit as standard



APPLICATIONS



Individual



Commercial



Collective

DISCHARGE

13 m



WARRANTY



SINGLE-PHASE REFERENCES

Sanifos 1300
Single-phase
Grinder

EAN 3308815077796

SANIFOS1300

Sanifos 1300
Single-phase
Vortex

EAN 3308815077802

SANIFOS1300VORTEX



Sanifos 1300 Single-phase Sanifos 1300 Three-phase



Wastewater pumping

Installation of two pumps on cast iron support bases with stainless steel guide bars for easy maintenance.

Extension accessory available for greater installation flexibility.

Vertical drilling area for effluent inlet with template provided.

Discharge level compatible with frost-proof installation.



Self-cleaning sloped tank bottom.

2 pumps running alternately for long-lasting, safe operation.

Supplied with SMART unit: interactive, intelligent station monitoring system.



APPLICATIONS



DISCHARGE

17 m
↑

WARRANTY



THREE-PHASE REFERENCE
Sanifos 1300
Three-phase Vortex
EAN 3308815077819
SANIFOS1300VORTEXTRI

WHEELS



KX V6 Vortex wheel system



Pro X K2 knife

2-PUMP UNDERGROUND PUMPING STATION




SANIFOS 1300 WITH EXTENSION

40 cm extension
Sanifos 1300 FEA:
896 - 2,014 mm
Reference:
EAN 3308815077826
RO250100



PUMP PERFORMANCE CURVE

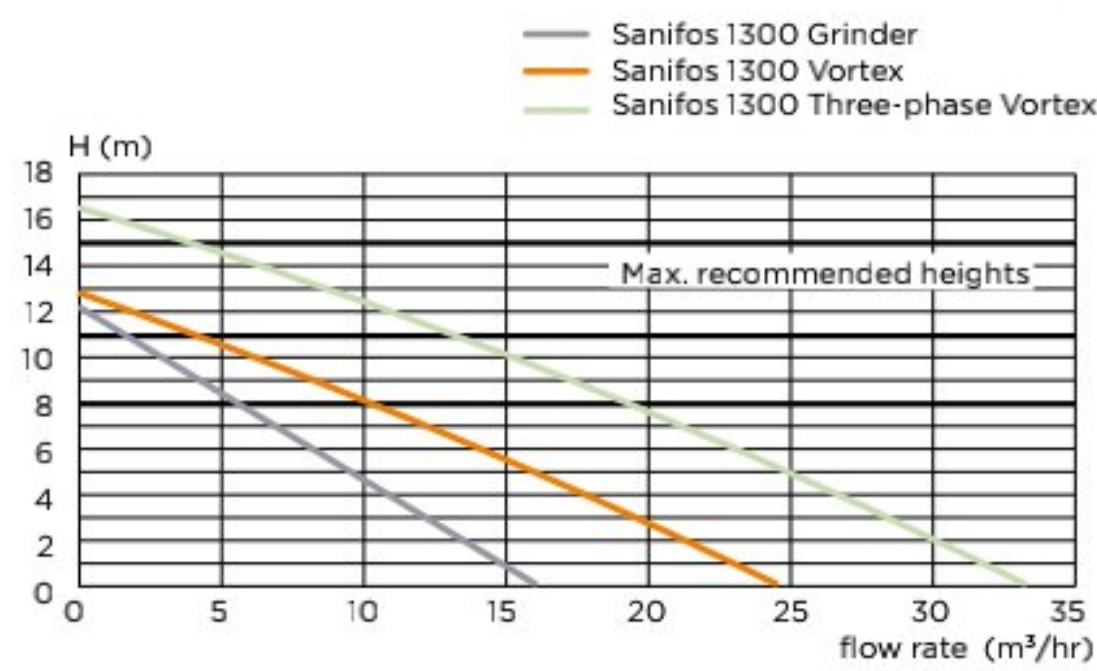

PACKING LIST

- Tank with pre-assembled hydraulics, 2 gate valves, 2 check valves and 3 floats installed inside the tank
- 2 submersible pumps
- Stainless steel handling chains with 2 fixing shackles, cable glands, waterproof terminal blocks, tank seal, 1 drilling template
- SMART control unit
- Remote alarm unit

TECHNICAL FEATURES

	Sanifos 1300 Grinder single.	Sanifos 1300 Vortex single.	Sanifos 1300 Vortex three.
TANK	Tank volume	1,300 l	
	Material	Polyethylene	
	Ø of ext. inlets	160 mm	
	Discharge diameter ext.	63 mm	
	Ventilation diameter	Ø 75	
	Maximum temperature of incoming wastewater	70°C intermittently (max. 5 min.)	
	ON/OFF level	650/150 mm	
PERFORMANCE	Wheel type	Grinder	Vortex
	Water inlet (FEA)	560 / 960 with extension	
	Possible connections	1 DN160	
	Voltage	230 V/50 Hz	400 V/50 Hz
	Consumption	2 x 1,500 W	2 x 2,800 W
	Thermal overload protection	Yes	
	Activation system	Float	
	Check valve	2	
	Max. absorbed intensity	2 x 6 A	2 x 7 A
	Station weight	116 kg	

PERFORMANCE

	16 m³/hr	25 m³/hr	32 m³/hr
Max. flow			
Max. height (Q = 0 m³/hr)	12m	13m	17m
Max. recommended height	8m	11m	15m



SMART control unit



Remote alarm unit



APPLICATIONS



Individual Commercial Collective

DISCHARGE

14 m



WARRANTY



REFERENCES

Sanipump SLD 700 SA
Single-phase
EAN 3308815083988
SLD-002

Sanipump SLD 700 S
Single-phase
EAN 3308815084015
SLD-001

Sanipump SLD 700 T
Three-phase
EAN 3308815084060
SLD-003



Sanipump SLD 700



Customised offer: choice of components according to requirements.

Heavy flows: up to 48 m³/hr.




Rainwater drainage.

Two-channel wheel for efficient drainage with 50 mm clearance.




DIMENSIONS

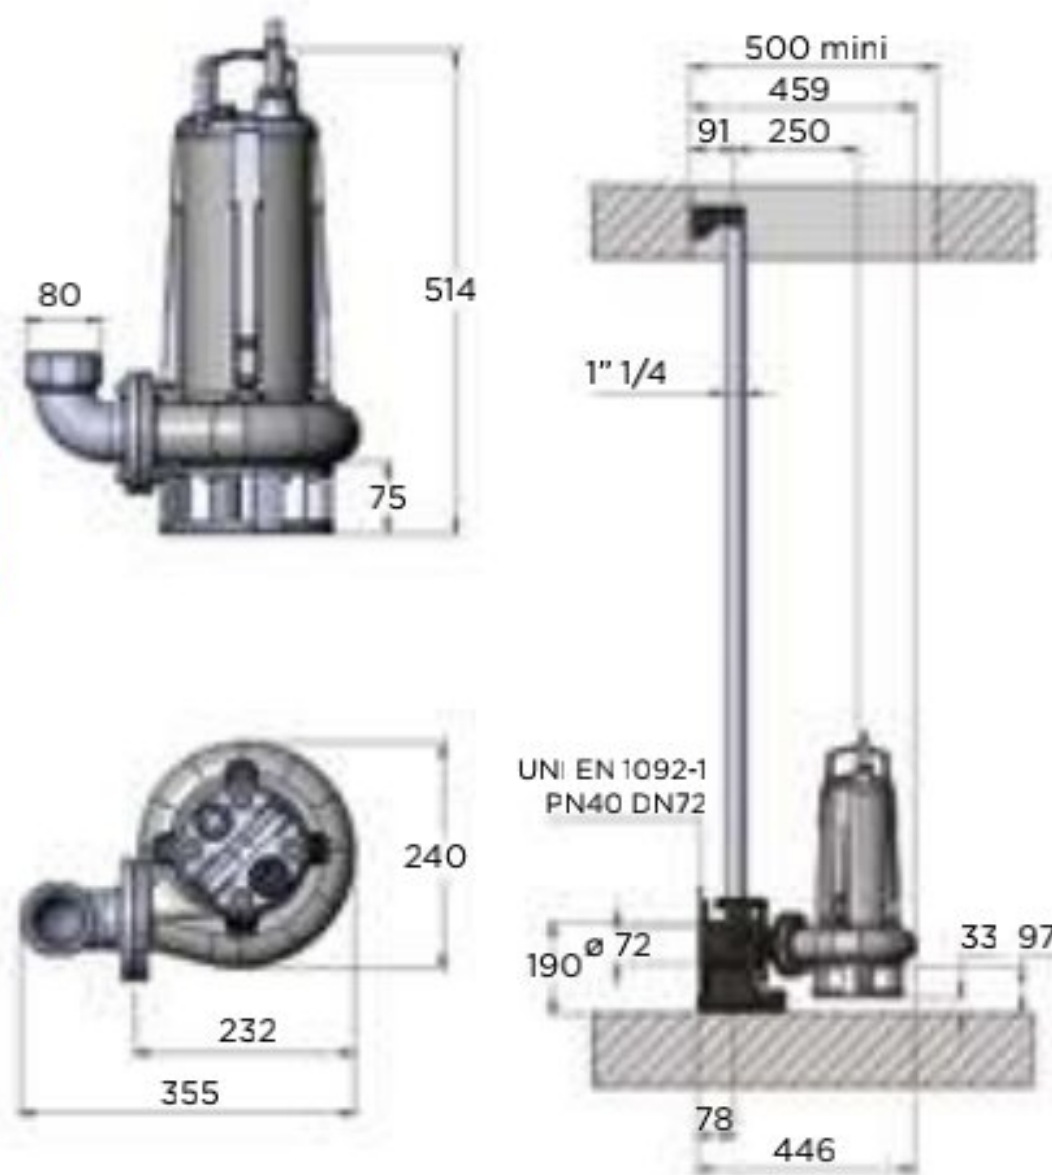

TECHNICAL FEATURES

Max. solid handling capacity	50 mm
Discharge diameter ext.	DN 50 (ext. 63)
Material	Stainless steel and cast iron
Max. temperature	70°C
Power rating	1,100 W
Voltage	230 V (single-phase models) 400 V (three-phase models)
Intensity	9.2 A (single-phase models) 3.3 A (three-phase models)
Weight	30 kg (Sanifos 610 SLD 700 SA) 29 kg (Sanifos 610 SLD 700 S / T)

PERFORMANCE CURVE

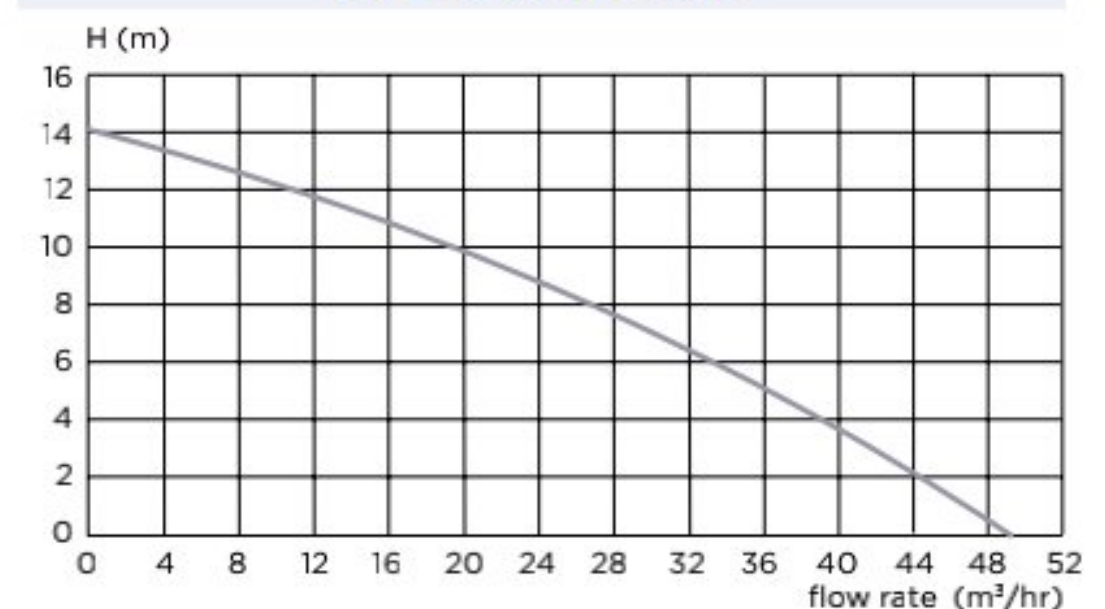

CAST IRON AND STEEL PUMPING STATION

Standing or with coupling system

Applications: rainwater (operational mode S1), sump water drainage

APPLICATIONS



DISCHARGE

14 m
↑

WARRANTY



Without base

With base

PUMP ONLY WITHOUT BASE

		Sanipump SLD 700 SA 1 pump	Sanipump SLD 700 S 1 pump	Sanipump SLD 700 T 1 pump	Sanipump SLD 700 S 2 pumps	Sanipump SLD 700 T 2 pumps
Pump with float and built-in control unit	3308815083988 SLD-002	X1				
Single-phase pump	3308815084015 SLD-001		X1		X2	
Three-phase pump	3308815084060 SLD-003			X1		X2
Float	3308815082691 FLOT-001		X3	X3	X4	X4
Drainage kit	3308815083995 KITEVAC-001	X1	X1	X1	X2	X2
ZPS single-phase 1 pump control unit	3308815081830 ZPS-005		X1			
ZPS three-phase 1 pump control unit	3308815081854 ZPS-007			X1		
ZPS single-phase 2 pump control unit	3308815081847 ZPS-006		X1		X1	
ZPS three-phase 2 pump control unit	3308815081878 ZPS-008					X1
Drainage kit accessories	3308815084022 KITACCESS-001	X1	X1	X1	X2	X2

1. Sanipump SLD 700 SA/S/T pump
2. Coupler 2" Ø 63

3. PVC pipe Ø 63 2 x 500 mm
4. Ball valve Y Ø 63

5. Gate valve Ø 63

PUMP ONLY WITH BASE

		Sanipump SLD 700 SA 1 pump	Sanipump SLD 700 S 1 pump	Sanipump SLD 700 T 1 pump	Sanipump SLD 700 S 2 pumps	Sanipump SLD 700 T 2 pumps
Pump with float and built-in control unit	3308815083988 SLD-002	X1				
Single-phase pump	3308815084015 SLD-001		X1		X2	
Three-phase pump	3308815084060 SLD-003			X1		X2
Float	3308815082691 FLOT-001		X3	X3	X4	X4
Drainage kit	3308815084008 KITEVAC-002	X1	X1	X1	X2	X2
ZPS single-phase 1 pump control unit	3308815081830 ZPS-005		X1			
ZPS three-phase 1 pump control unit	3308815081854 ZPS-007			X1		
ZPS single-phase 2 pump control unit	3308815081847 ZPS-006				X1	
ZPS three-phase 2 pump control unit	3308815081878 ZPS-008					X1
3M guide bar	3308815082028 HYDRO-00006	X2	X2	X2	X4	X4
Coupling system	3308815084176 HYDRO-00060	X1	X2	X2	X2	X2
Drainage kit accessories	3308815084039 KITACCESS-002	X1	X1	X1	X2	X2

1. Sanipump SLD 700 SA/S/T pump
2. Base
3. 1 1/4" guide bar

4. Coupler 2" 1/2 Ø 63
5. Elbow 90° MF
6. PVC pressure hose Ø 63 2 x 500 mm

7. Ball valve Y Ø 63
8. Gate valve Ø 63



Single-phase Sanipump SLD with drainage kit and coupling system



Two-channel wheel with 50 mm clearance

APPLICATIONS



Individual



Commercial

DISCHARGE

19 to 31 m



WARRANTY



REFERENCES

See table right page



Sanipump ZPG 71



Cast iron submersible pump for pumping grey water and rainwater (S1 mode if motor fully submerged).

Can be installed in a manhole or in a pit.

All accessories are available for installation on the floor or on a base.

Two-channel wheel.

Free passage 40 mm.

Compatible with Sanifos 1600 / 2100 / 3100.




Two-channel Wheel

PERFORMANCE

TMH max.	31 m
Max. flow rate	43 m ³ /h

PUMP PERFORMANCE CURVE

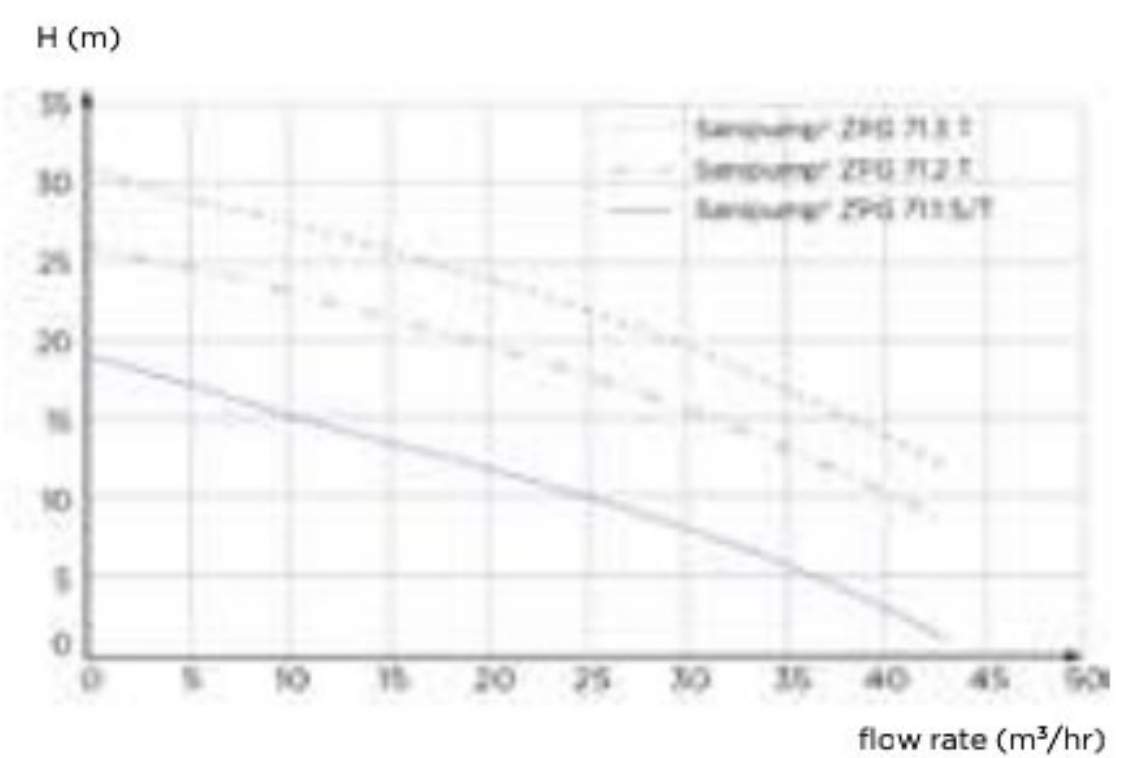

APPLICATIONS



Individual




Commercial

DISCHARGE

19 to 31 m



DIMENSIONS

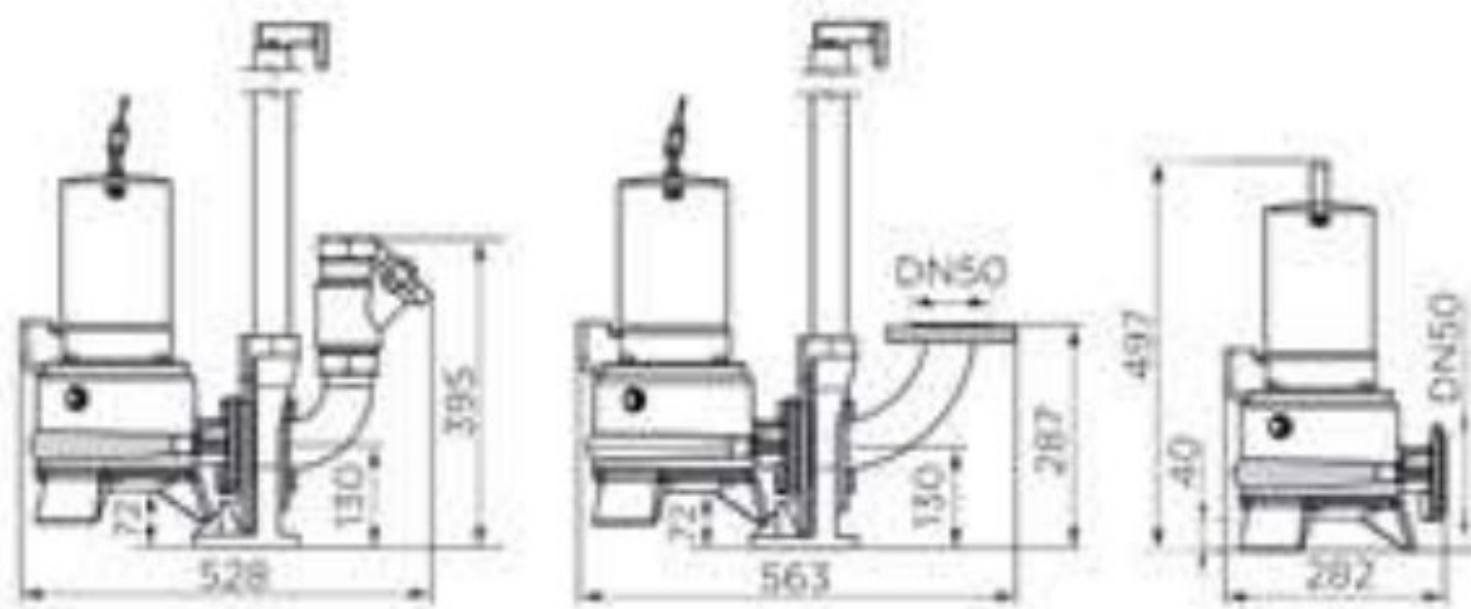

	SANIPUMP ZPG 71.1 S	SANIPUMP ZPG 71.1 T	SANIPUMP ZPG 71.2 T	SANIPUMP ZPG 71.3 T
MATERIALS				
Pump housing	GG-20	GG-20	GG-20	GG-20
Shaft	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Waterproofing	Carbon/ceramic	Carbon/ceramic	Carbon/ceramic	Carbon/ceramic
Motor housing	GG-20	GG-20	GG-20	GG-20
Impeller	GG-20	GG-20	GG-20	GG-20
Foot	GG-20	GG-20	GG-20	GG-20
ELECTRICALS FEATURES				
Voltage (V)	230	400	400	400
Frequency (Hz)	50-60	50-60	50-60	50-60
Power consumption P1 (P=power) (W)	2200	2100	3900	3900
Power output P2 (P=power) (W)	1600	1700	3200	3200
RPM (=revolution per minute) (tours/min)	2800	2800	2800	2800
Electrical class	I	I	I	I
Motor insulation class	F	F	F	F
Submerged	S1	S1	S1	S1
Mode of operation	S3 40%	S3 40%	S3 40%	S3 40%
Immersion depth (m)	5	5	5	5
Power cable: Length (m)	10	10	10	10
Power cable: Type, Section	S1BN8-F, 1,5	S1BN8-F, 1,5	S1BN8-F, 1,5	S1BN8-F, 1,5
HYDRAULICS				
Total manometric head (m)	19	19	26	31
Max. flow rate (m ³ /h)	43	43	43	43
Discharge diameter DN	50	50	50	50
Particle size (mm)	40	40	40	40
Type of wheel	Two-channel	Two-channel	Two-channel	Two-channel
Max. temperature of the pumped liquid (5 min)	70°C	70°C	70°C	70°C
IDENTIFICATION AND LOGISTICS				
Gross weight (kg)	38	40	44	46
EAN code	3308815081533	3308815081540	3308815081557	3308815081564
Factory code	ZPG-001	ZPG-002	ZPG-003	ZPG-004

(DN=nominal diameter)

APPLICATIONS



Individual



Commercial

DISCHARGE

22 to 39 m



WARRANTY



REFERENCES

See table right page



Grinder wheel
Pro X K3

Sanipump ZFS 71




Cast iron submersible grinder pump for all waste water.
S1 mode (if fully submerged motor).
Can be used for multiple applications.
Suitable for public buildings..

Compatible with Sanifos 1600/2100/3100.
Grinder.
DN50 evacuation.

PERFORMANCE

TMH max.	39 m
Max. flow rate	17 m ³ /h

PUMP PERFORMANCE CURVE

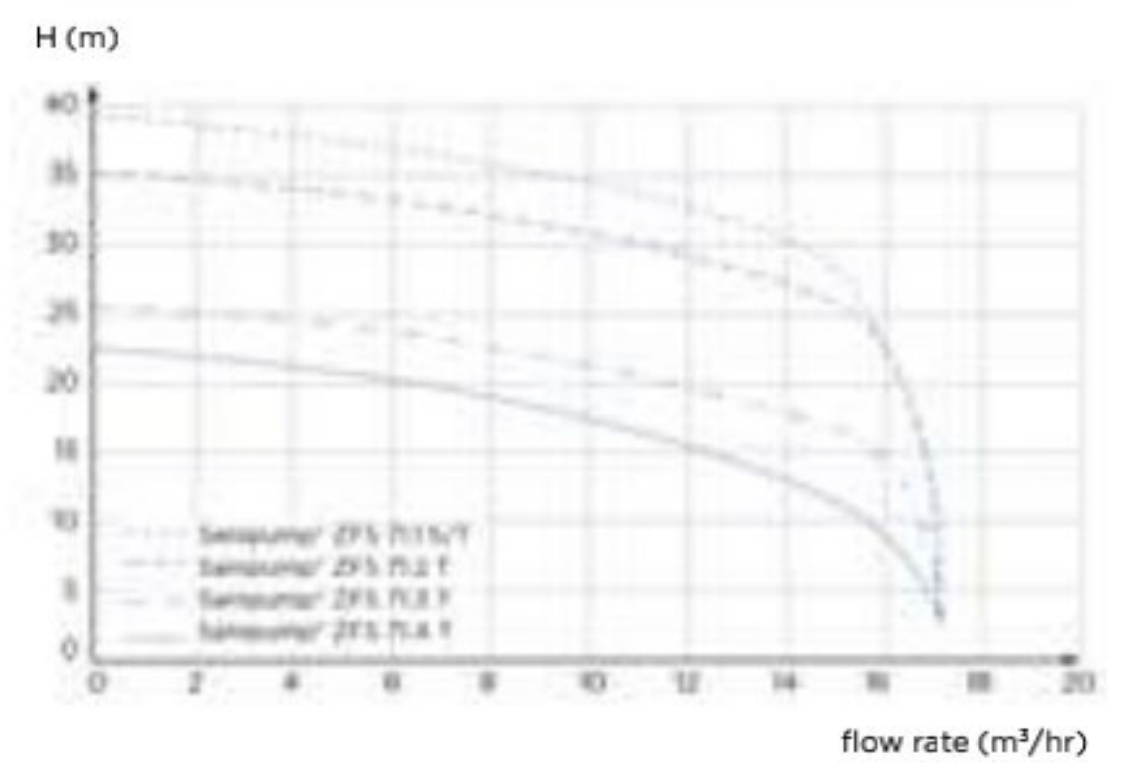

APPLICATIONS



Individual




Commercial

DISCHARGE

22 to 39 m




DIMENSIONS

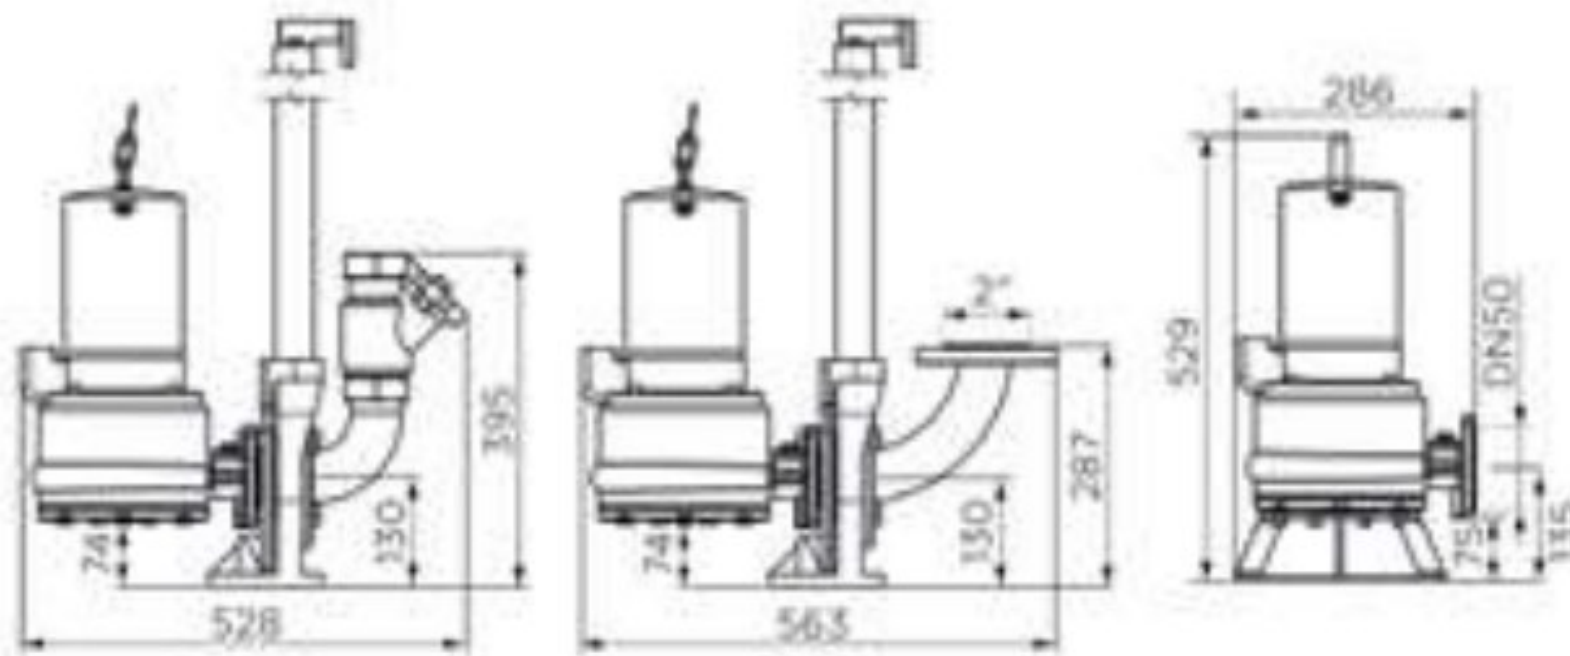


	SANIPUMP ZFS 71.1 S	SANIPUMP ZFS 71.1 T	SANIPUMP ZFS 71.2 T	SANIPUMP ZFS 71.3 T	SANIPUMP ZFS 71.4 T
MATERIALS					
Pump housing	GG-20	GG-20	GG-20	GG-20	GG-20
Shaft	Stainless steel	Stainless steel	Stainless steel	Stainless steel	Stainless steel
Waterproofing	Carbon/ceramic	Carbon/ceramic	Carbon/ceramic	Carbon/ceramic	Carbon/ceramic
Motor housing	GG-20	GG-20	GG-20	GG-20	GG-20
Impeller	GG-20	GG-20	GG-20	GG-20	GG-20
Foot	GG-20	GG-20	GG-20	GG-20	GG-20
ELECTRICALS FEATURES					
Voltage (V)	230	400	400	400	400
Frequency (Hz)	50-60	50-60	50-60	50-60	50-60
Power consumption P1 (P=power) (W)	2200	2100	3900	3900	3900
Power output P2 (P=power) (W)	1600	1700	3200	3200	3200
RPM (=revolution per minute) (tours/min)	2800	2800	2800	2800	2800
Electrical class	I	I	I	I	I
Motor insulation class	F	F	F	F	F
Submerged	S1	S1	S1	S1	S1
Mode of operation	S3 40%	S3 40%	S3 40%	S3 40%	S3 40%
Immersion depth (m)	5	5	5	5	5
Power cable: Length (m)	10	10	10	10	10
Power cable: Type, Section	S1BN8-F , 1,5	S1BN8-F , 1,5	S1BN8-F , 1,5	S1BN8-F , 1,5	S1BN8-F , 1,5
ATEX	Yes	Yes	Yes	Yes	Yes
HYDRAULICS					
Total manometric head (m)	22	22	25	35	39
Max. flow rate (m ³ /h)	17	17	17	17	17
Discharge diameter DN	50	50	50	50	50
Type of wheel	Grinder	Grinder	Grinder	Grinder	Grinder
Max. temperature of the pumped liquid (5 min)	70°C	70°C	70°C	70°C	70°C
IDENTIFICATION AND LOGISTICS					
Gross weight (kg)	38	38	38	42	42
EAN code	3308815081571	3308815081588	3308815081595	3308815081601	3308815081618
Factory code	ZFS-001	ZFS-002	ZFS-003	ZFS-004	ZFS-005

(DN=nominal diameter)


Sanifos 110

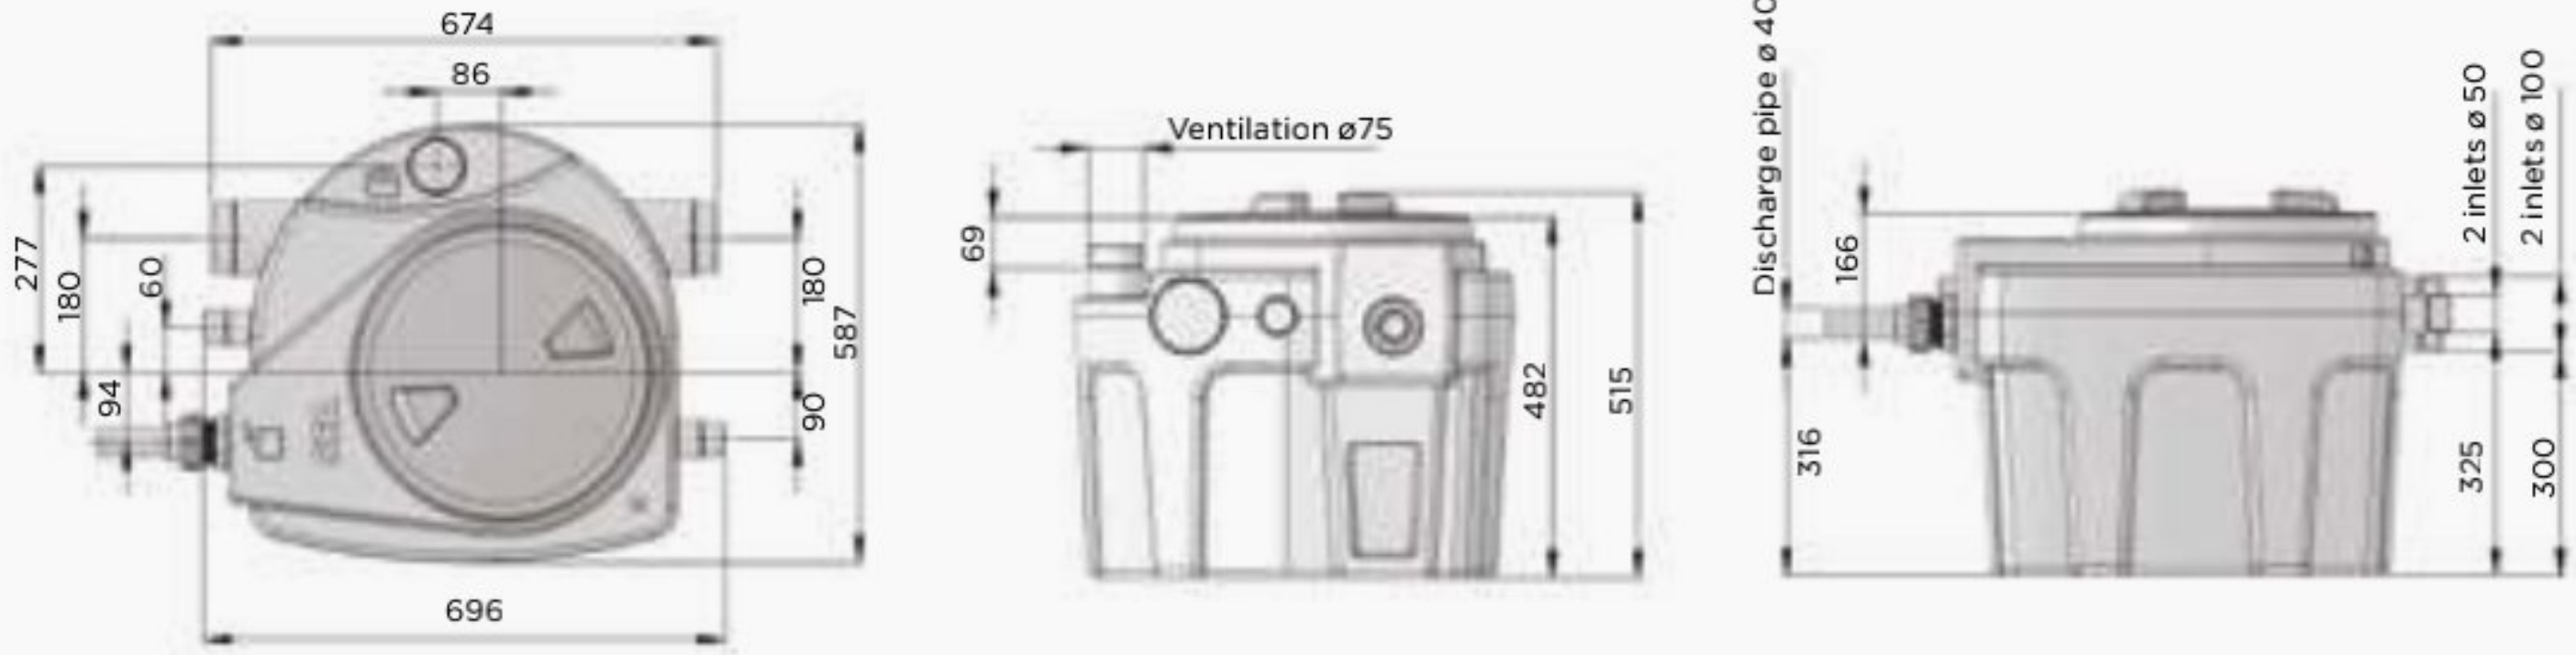


Sanifos 280

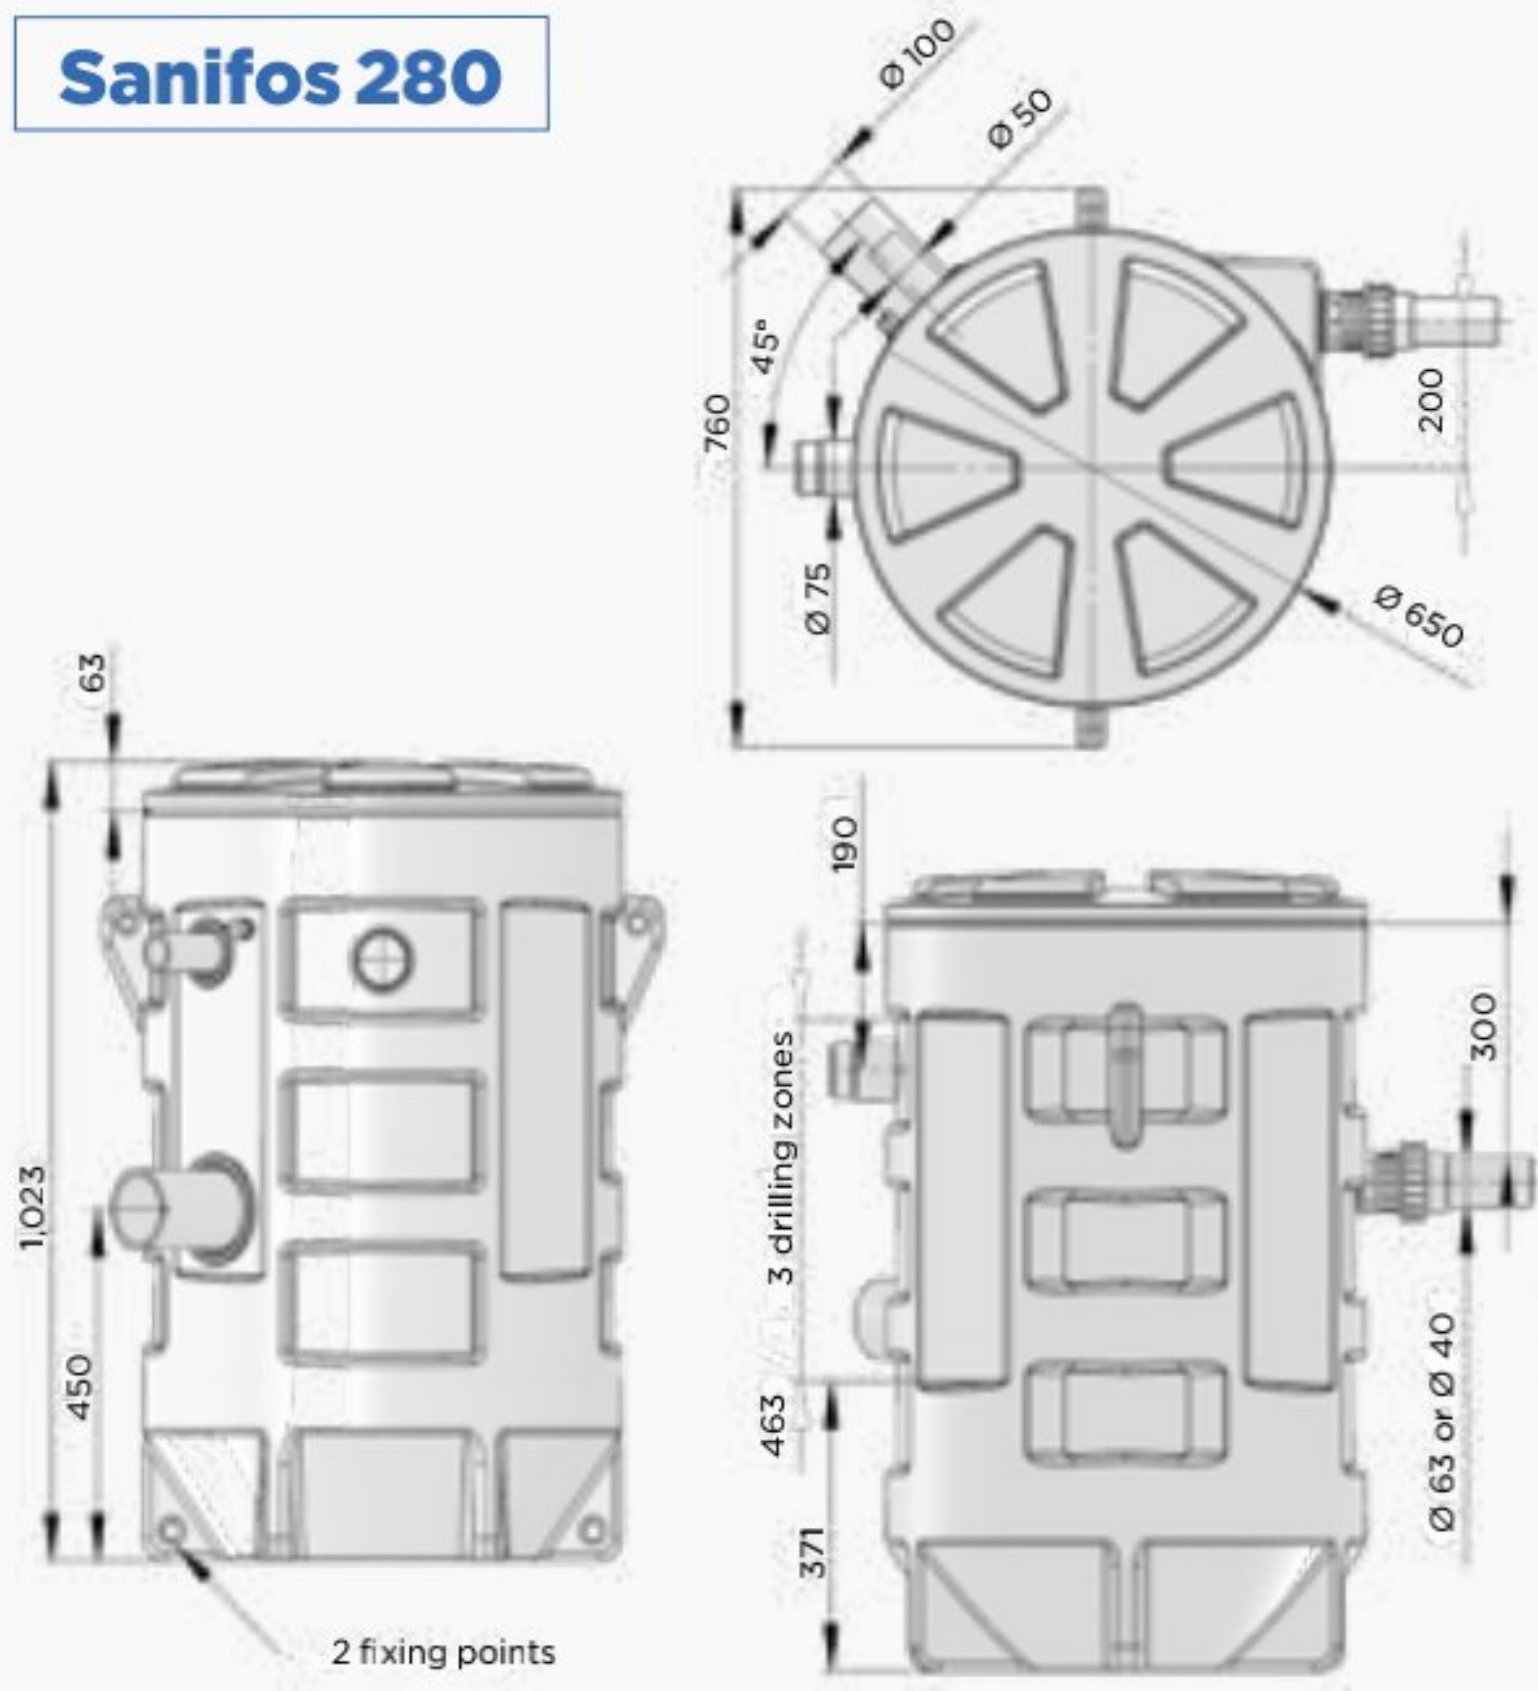

Sanifos 610 *Single-phase* Sanifos 610 *Three-phase*

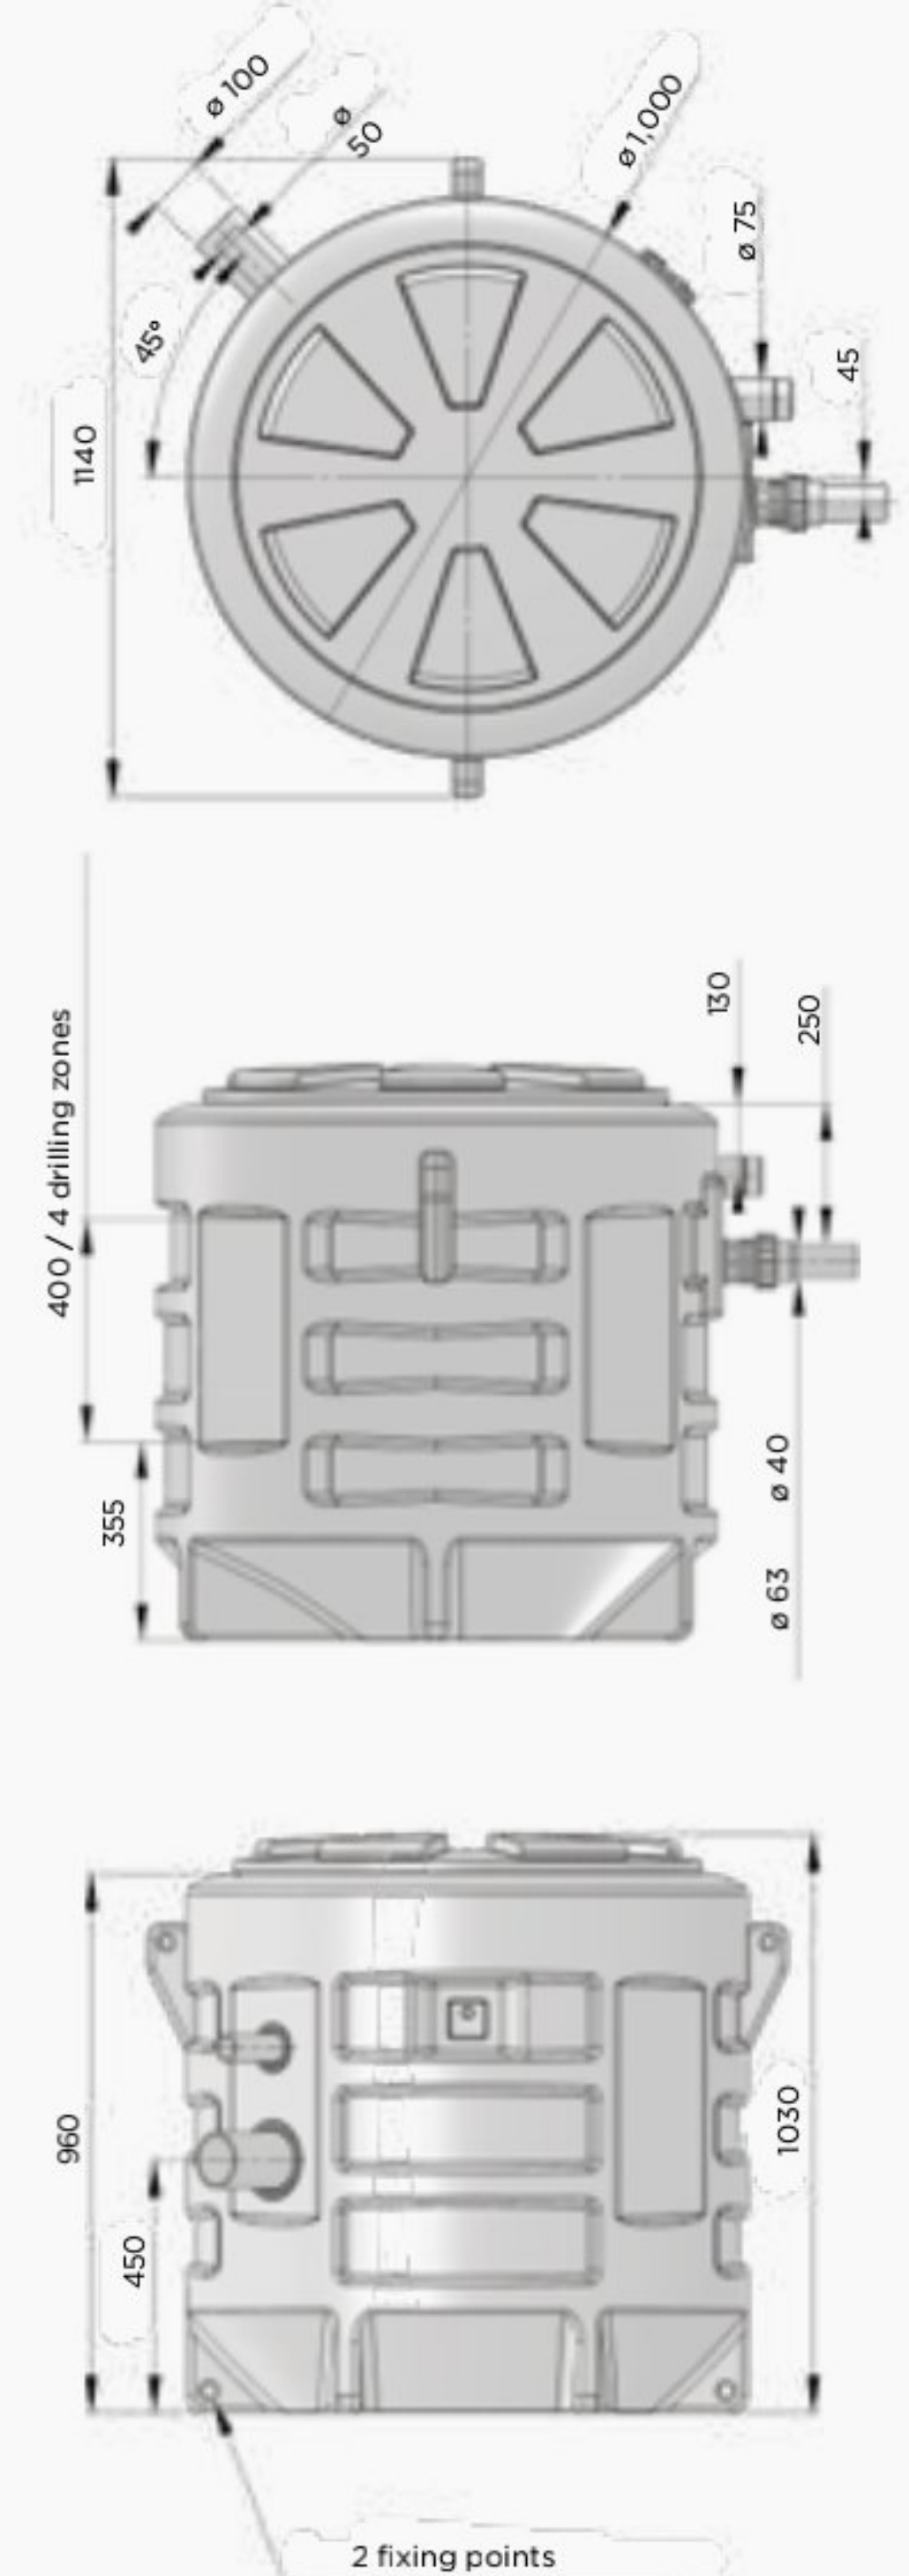

Sanifos 1300 *Single-phase* Sanifos 1300 *Three-phase*

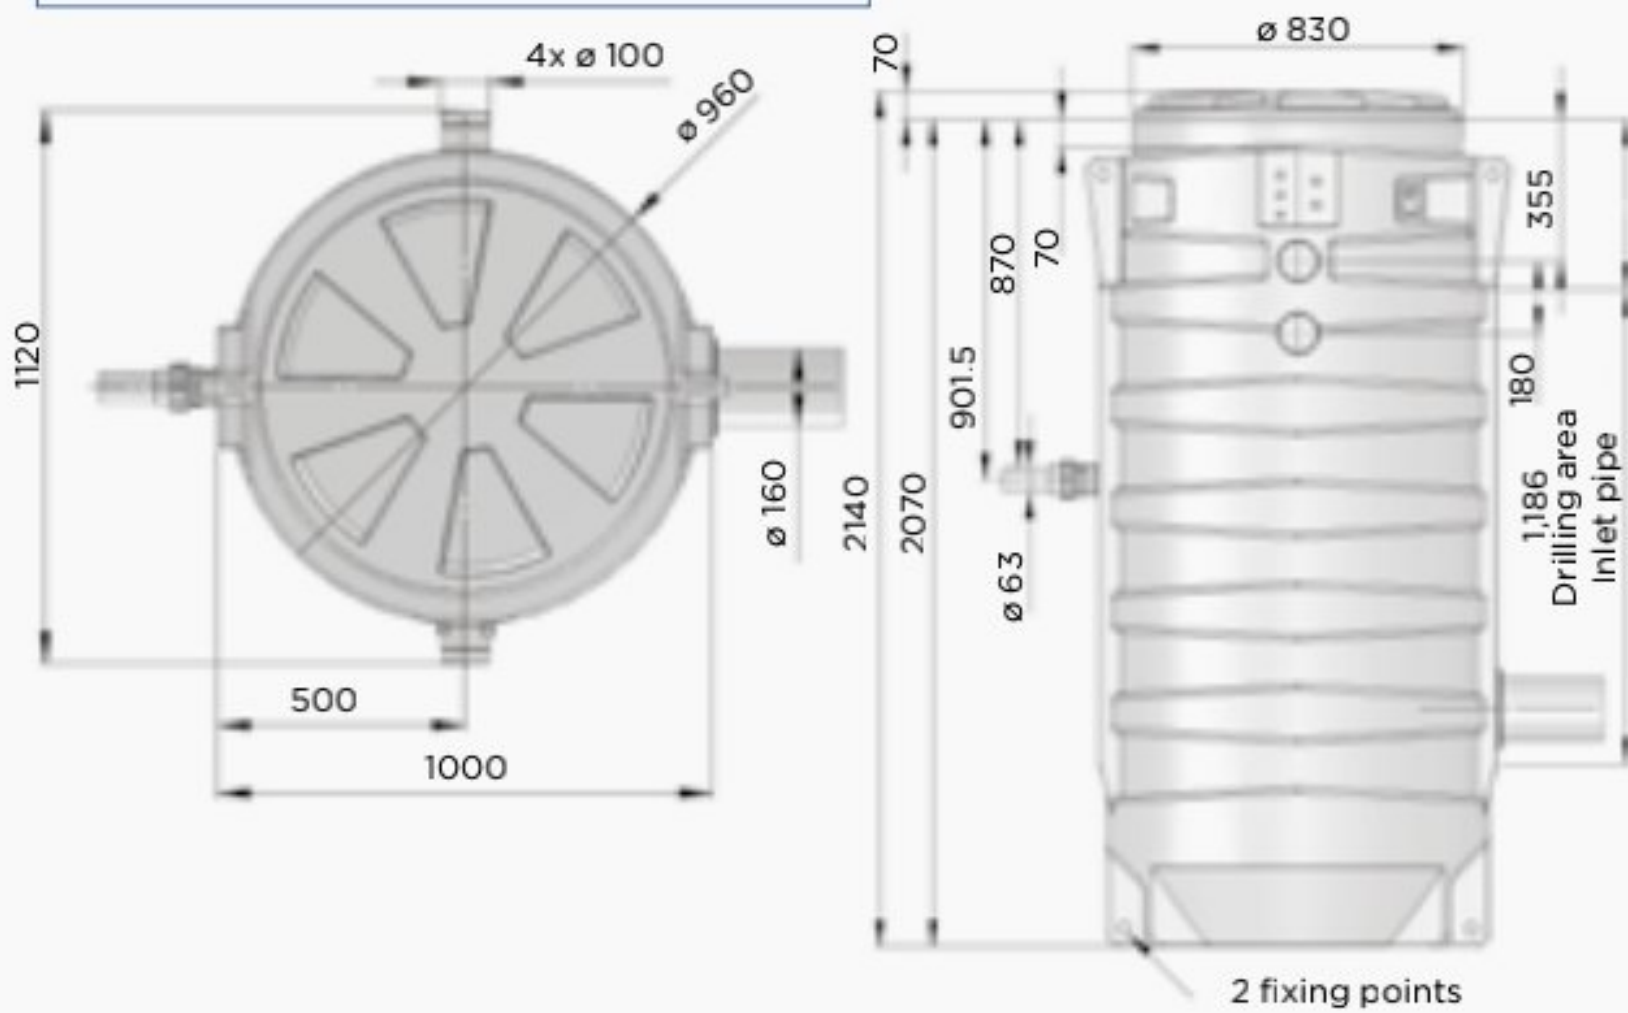

Ethics Charter

“ENSURING THAT BUSINESS ETHICS IS CENTRAL TO RESPONSIBLE GROWTH.”

OUR SFA GROUP COMMITMENT

SFA is an industrial group with a Worldwide presence, whose primary objective is simple: to design and manufacture domestic and professional solutions wherever water flows.

Our ambition is to continue to GROW TOGETHER with all our partners and stakeholders (all those who participate in our business life, those who view the company, and those that we influence either directly or indirectly), in a common approach of development and permanent progress.



◊ The commitment to respect guides our relationships with all our stakeholders and must be a permanent part of our activities and our business relationships. Recognition of individual difference must be taken into consideration and go beyond minimum compliance with laws and regulations.

Respect is at the heart of human interaction, not only within SFA and towards our clients, but also in our social and wider environments.

We respect individuals and their right to privacy.

◊ Our commitment to integrity leads us to strictly respect our duty of honesty in our business relationships. It requires all of us; management in particular, to lead by example in fulfilling our duties to our clients, colleagues and all other stakeholders.

◊ Our quality commitment is to provide our customers with a quality service. Quality applies to all business sectors and everyone plays a role and contributes to achieving this goal. Our ambition is to be recognized and approved by all our stakeholders as we grow together.

◊ The Team spirit that inspires us encompasses solidarity and cooperation. This means that we can combine the best skills for the benefit of our customers and stakeholders, and together overcome the challenges we face today and in the future.

Our principles of action and conduct are in accordance with fundamental principles, such as those of the Universal Declaration of Human Rights, of modern slavery law and those set by the International Labour Organisation (especially those concerning prohibition of child labour and forced labour).



SFA
41 bis Avenue Bosquet 75007 Paris
Tel. : + 33 1 44 82 39 20

export@sfa.fr

Youtube Channel
SFA EXPORT

www.export.sfagroup.com

